


ENTRANCE SIGN FOR USE WITH TEMPORARY SIGNALS

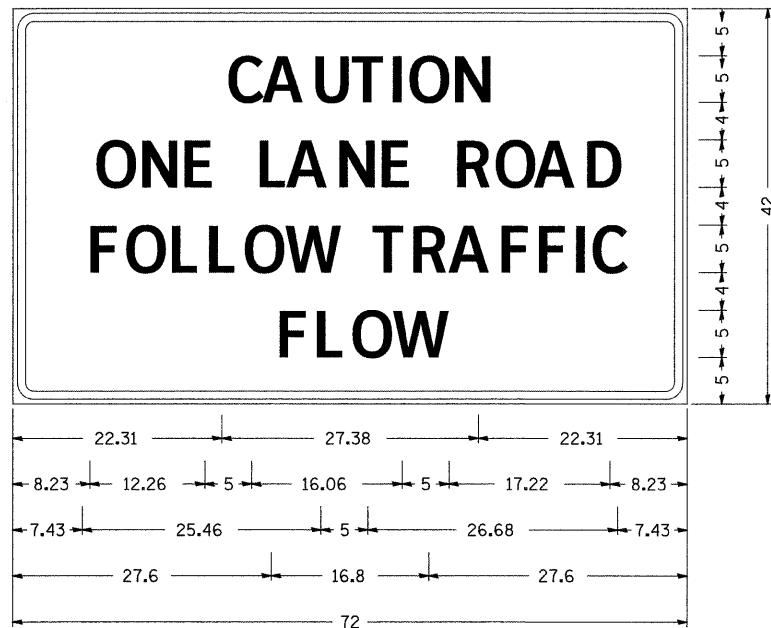

Type AA Fluorescent Orange Sheeting ;
 2.25" Radius, 0.88" Border, 0.50" Indent, Black on Orange;
 [CAUTION] D; [ONE LANE ROAD] D;
 [FOLLOW TRAFFIC] D; [FLOW] D

Table Of Widths And Spaces

22.31	C	3.36	0.62	4.18	0.94	3.36	0.94	3.04	0.94	0.78	1.17	3.52	1.17	3.36	22.31
8.23	O	3.51	1.17	3.36	1.18	3.04									
5.00	L	3.05	0.31	4.18	0.94	3.36	1.17	3.05							
5.00	R	3.36	0.93	3.52	0.94	4.18	0.93	3.36	8.23						
7.43	F	3.04	0.94	3.52	1.17	3.04	0.94	3.05	0.94	3.51	0.94	4.37			
5.00	T	3.05	0.94	3.36	0.94	4.18	0.93	3.05	0.94	3.04	0.94	0.78	1.18	3.35	7.43
27.60	F	3.05	0.94	3.04	0.94	3.52	0.93	4.38	27.60						

GENERAL NOTES

THIS SIGN SHALL BE INSTALLED AT ENTRANCES LOCATED BETWEEN THE TEMPORARY SIGNALS AS DIRECTED BY THE ENGINEER.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.


THE COST TO FURNISH, INSTALL AND REMOVE THIS SIGN AT THE REQUIRED LOCATIONS SHALL BE INCLUDED IN THE COST OF TRAFFIC CONTROL AND PROTECTION STANDARD 701321.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.


REVISED - 10-28-05

NAME PLATE FOR CULVERTS


FOR 24"-42" PIPE CULVERTS

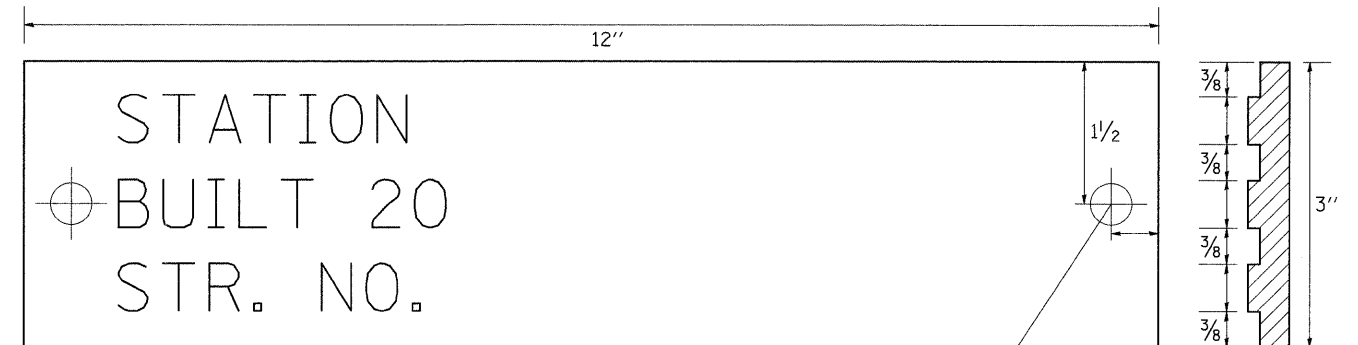

FOR 48"-84" PIPE CULVERTS

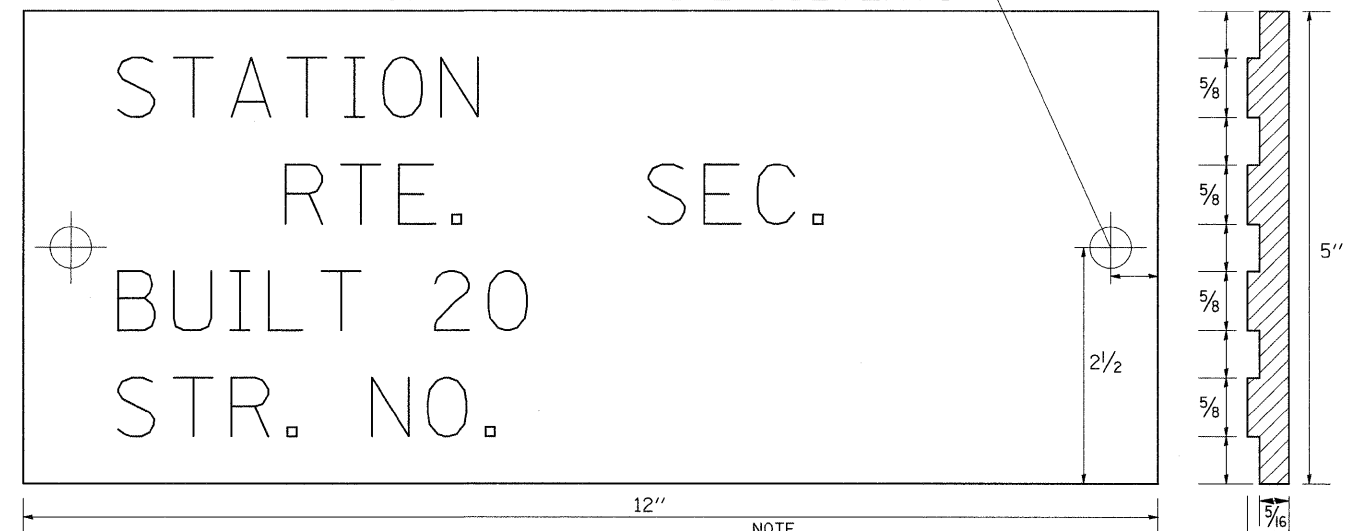

NOTE
 LETTERING RAISED 1/8, SQUARE CUT AND NOT TAPERED

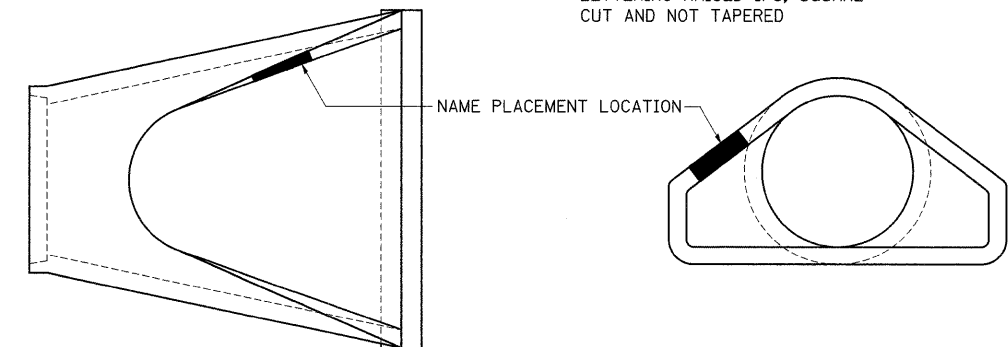

DESIGNERS NOTE

NAME PLATES SHALL BE FURNISHED & INSTALLED ACCORDING TO SECTION 515 OF THE STANDARD SPECIFICATIONS, EXCEPT 2 BOLTS SHALL BE USE TO FASTEN THE PLATE TO THE END SECTION.

USE STANDARD 515001 FOR BRIDGES AND MULTI-CELL CULVERTS WITH SPANS OF 20' OR MORE MEASURED ALONG THE CENTERLINE AT THE HIGHWAY.

USE THIS DETAIL FOR ALL OTHER PIPE CULVERTS & BOX CULVERTS WITH STRUCTURE NUMBERS. INCLUDE THE INFORMATION TO FILL OUT THE NAME PLATE FOR EACH CULVERT.

IN BOTH CASES INCLUDE A PAY ITEM FOR NAME PLATES.

STATION	STRUCTURE NO.

REVISED - 5-27-09	REGION 2 / DISTRICT 2 STANDARD	F.A.P. RTE. 585	SECTION 128T-1	COUNTY HENRY	TOTAL SHEETS 35	SHEET NO. 30
REVISED -		SCALE: 50,000' / IN		SHEET NO. OF SHEETS STA.	TO STA.	FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT
REVISED -		CONTRACT NO. 64G18				
REVISED -						