


STA. 99+75.52 - 1+25.00
(CONGRESS STREET)

STATION EQUATION:
STA. 100+00.00 (BK) = STA. 0+34.90 (AH)

LEGEND

- ① EXISTING PCC PAVEMENT (9-6-9)
- ② EXISTING HOT-MIX ASPHALT SURFACE COURSE
- ③ EXISTING PCC WIDENING (8")
- ④ EXISTING CONCRETE CURB & GUTTER
- ⑤ EXISTING NATURAL CEMENT BASE (4")
- ⑥ EXISTING SAND CUSHION (1 1/2")
- ⑦ EXISTING BRICK ON EDGE
- ⑧ EXISTING SANDSTONE CURB
- ⑨ EXISTING OPEN-GRADED ASPHALT FRICTION COURSE
- ⑩ PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL (2")
- ⑩A PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH
- ⑪ PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "D" (2")
- ⑫ PROPOSED PREFORMED PLASTIC PAVEMENT MARKING, LINE, SKIP-DASH, YELLOW (5")
- ⑬ PROPOSED THERMOPLASTIC PAVEMENT MARKING, LINE, SOLID, WHITE (5")

••NOTE: MAINLINE OVERLAY THICKNESS 3/4" GREATER THAN PARKING LANE OVERLAY.
MILL 2" ALONG GUTTER LINE AND VARY DEPTH OF MILLING ACROSS PARKING LANE TO
MATCH MILLED DEPTH AT MAINLINE EDGE OF PAVEMENT.

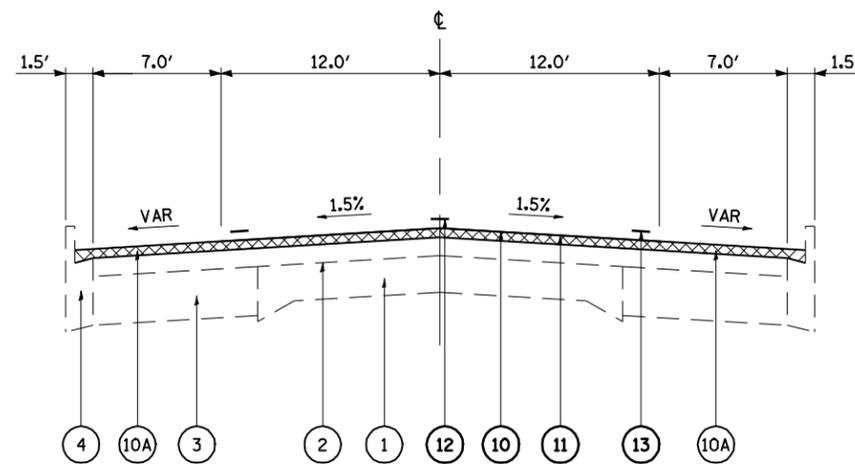

STA. 1+25.00 - 11+00.00
STA. 24+06.00 - 28+45.00
(CONGRESS STREET)

FILE NAME =	USER NAME = laughlinr1	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
es:\pwwork\pwwid\LAUGHLINRL\0177182\0672B40-ah-typical.dgn	DRAWN -	REVISIED -	317			11RS-4 & (6CS)RS-4,I	SCHUYLER	6	17	
PLOT SCALE = 10,0000 ' / IN.	CHECKED -	REVISIED -	CONTRACT NO. 72B40							
PLOT DATE = Mar-25-2010 04:01:35PM	DATE -	REVISIED -	SCALE:			SHEET NO. 6 OF 17 SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT		