


MATCH LINE 110+00.00

MATCH LINE 116+00.00

- KEY**
- ✕ TREES TO BE REMOVED
  - AS 2-1/2" TREE, ACER SACCHARUM (SUGAR MAPLE),  
2-1/2" CALIPER, BALLED AND BURLAPPED
  - QP 2-1/2" TREE, QUERCUS PALUSTRIS (PIN OAK),  
2-1/2" CALIPER, BALLED AND BURLAPPED
  - OR 2-1/2" TREE, QUERCUS RUBRA (RED OAK),  
2-1/2" CALIPER, BALLED AND BURLAPPED
  - CC 2" TREE, CERCIS CANADENSIS (EASTERN REDBUD),  
2" CALIPER, TREE FORM, BALLED AND BURLAPPED
  - MS 2" TREE, MALUS SNOWDRIFT (SNOWDRIFT CRAB APPLE),  
2" CALIPER, TREE FORM, BALLED AND BURLAPPED
  - PS 3" EVERGREEN, PINUS STROBUS (EASTERN WHITE PINE),  
3" CALIPER, BALLED AND BURLAPPED

- NOTES:**
1. TYPICAL TREE SPACING IS 20' X 20'.
  2. TREES SHALL NOT BE LOCATED WITHIN 10' OF ANY UNDERGROUND UTILITY.
  3. TREES SHALL NOT BE PLACED ON SLOPES STEEPER THAN 3:1.

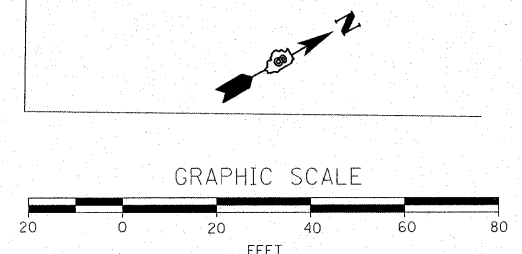

FILE NAME = DB76830-sht-1ndscp.dgn	USER NAME = cha	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 1:20	CHECKED -	REVISED -
	PLOT DATE = 6/24/2009	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**LANDSCAPE PLAN**

SCALE: 1:20      SHEET NO. OF SHEETS      STA. 110+00.00 TO STA. 116+00.00

F.A. RTE. 600	SECTION 60-(30.31.128)-1	COUNTY	TOTAL SHEETS 399	SHEET NO. 231
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		
CONTRACT NO. 76830				