


MAILBOX TURNOUT SCHEDULE

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAU 9314 C.H. 7	09-00034 -01-RS	MONROE	8	7

FEDERAL AID PROJECT
CONTRACT 97443

LOCATION STATION	SIDE LT/RT	INCIDENTAL HOT MIX ASPHALT SURFACING TONS	BIT. MAT'L (PRIME COAT) GALLON	AGGREGATE (PRIME COAT) TON
104+67.26	LEFT	1.6	0.7	0.02
107+99.71	LEFT	1.6	0.7	0.02
110+23.74	RIGHT	1.6	0.7	0.02
110+28.42	LEFT	1.6	0.7	0.02
116+43.23	LEFT	1.6	0.7	0.02
119+29.14	LEFT	1.6	0.7	0.02
123+63.26	LEFT	1.6	0.7	0.02
140+09.74	RIGHT	1.6	0.7	0.02
141+16.03	RIGHT	1.6	0.7	0.02
142+35.39	RIGHT	1.6	0.7	0.02
143+47.83	RIGHT	1.6	0.7	0.02
144+49.94	RIGHT	1.6	0.7	0.02
145+21.54	RIGHT	1.6	0.7	0.02
145+71.84	RIGHT	1.6	0.7	0.02
146+42.60	RIGHT	1.6	0.7	0.02
147+49.41	RIGHT	1.6	0.7	0.02
147+91.90	RIGHT	1.6	0.7	0.02
148+48.20	RIGHT	1.6	0.7	0.02
149+18.54	RIGHT	1.6	0.7	0.02
149+89.29	RIGHT	1.6	0.7	0.02
151+70.79	RIGHT	1.6	0.7	0.02
153+28.04	RIGHT	---	---	---
154+60.02	RIGHT	---	---	---
156+12.49	RIGHT	---	---	---
157+89.45	RIGHT	---	---	---
158+01.02	RIGHT	---	---	---
159+60.56	RIGHT	---	---	---
160+31.81	LEFT	---	---	---
160+37.51	LEFT	---	---	---
174+94.78	LEFT	1.6	0.7	0.02
178+85.03	LEFT	1.6	0.7	0.02
180+51.96	LEFT	1.6	0.7	0.02
182+03.34	LEFT	1.6	0.7	0.02
183+16.50	LEFT	1.6	0.7	0.02
184+37.27	LEFT	1.6	0.7	0.02
186+38.01	LEFT	1.6	0.7	0.02
186+59.40	LEFT	1.6	0.7	0.02
190+27.98	LEFT	1.6	0.7	0.02
194+04.44	LEFT	1.6	0.7	0.02
196+26.18	LEFT	1.6	0.7	0.02
199+20.24	LEFT	1.6	0.7	0.02
TOTALS		52.8	23.1	0.66

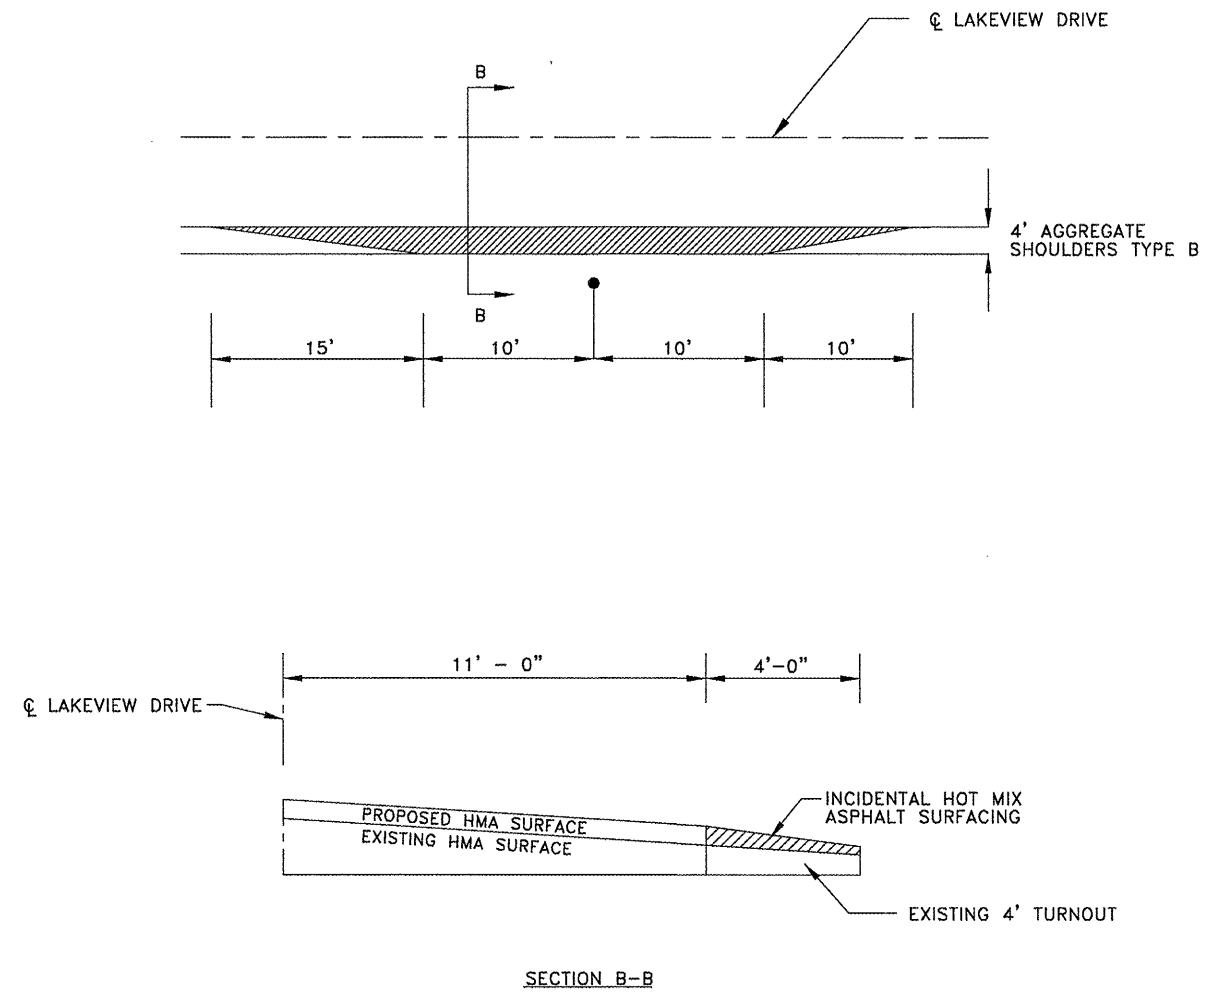

TYPICAL MAILBOX TURNOUT DETAIL

DRAWING FILE: S:\lakeview\lakeviewresurf\cover1.dwg

LAKEVIEW DRIVE RESURFACING
DETAILS & SCHEDULES
SEC 09-00034-01-RS
CITY OF WATERLOO
MONROE COUNTY, ILLINOIS