


ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
I-290	2009-030 PP	COOK & DUPAGE	15	1

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
**DISTRICT ONE**  
**PROPOSED HIGHWAY PLANS**

**CONTRACT NO. 60G29**


D-91-360-09

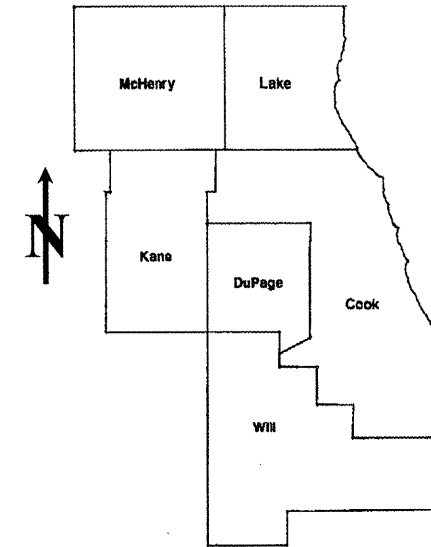

LOCATION OF IMPROVEMENT INDICATED THUS:

FOR INDEX OF SHEETS SEE SHEET 2

FAI 290: I-290 (EISENHOWER EXPRESSWAY)  
 IL 64 (NORTH AVE.) TO I-90/94  
 SECTION: 2009-030 PP  
 PAVEMENT PATCHING  
 COOK & DUPAGE COUNTIES  
 C-91-360-09



DISTRICT ONE - DESIGN - PLAN PREPARATION ENGINEER:  
 KEN ENG / (847) 705-4247

**CONTRACT NO. 60G29**

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
 SUBMITTED: MARCH 24, 2009  
*Diana M. O'Hara*  
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER  
May 8, 2009  
*Charles J. Ingersoll*  
 ENGINEER OF DESIGN AND ENVIRONMENT  
May 8, 2009  
*Christine M. Reed*  
 DIRECTOR, DIVISION OF HIGHWAYS

**PRINTED BY THE AUTHORITY**  
**OF THE STATE OF ILLINOIS**

**J.U.L.I.E.: JOINT UTILITY LOCATION**  
**INFORMATION FOR EXCAVATION**  
**(312) 744-7000**

Rev. 5-27-09

URBAN  
100%  
STATE

SUMMARY OF QUANTITIES			CONSTRUCTION TYPE CODE		
CODE NO	ITEM	UNIT	TOTAL QUANTITIES	COOK COUNTY 1000	DUPAGE COUNTY 1000
40600200	BITUMINOUS MATERIALS (PRIME COAT)	TON	2	1.9	0.1
40600300	AGGREGATE (PRIME COAT)	TON	15	14	1
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGWAYS	TON	23	22	1
40600895	CONSTRUCTING TEST STRIP	EACH	1	0.9	0.1
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SO YD	217	206	11
40603345	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N90	TON	486	461	25
44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SO YD	4337	4110	227
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	3	2.8	0.2
67100100	MOBILIZATION	L SUM	1	0.9	0.1
70300530	PAVEMENT MARKING TAPE, TYPE III 5"	FOOT	2100	1995	105
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SO FT	875	831	44
*78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	6827	6487	340
*78004220	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - INLAID - LINE 5"	FOOT	2100	1995	105
*78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	210	200	10
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	210	200	10
X7011015	TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS)	L SUM	1	0.9	0.1
X0325702	NIGHTTIME WORK ZONE LIGHTING	L SUM	1	1	

SUMMARY OF QUANTITIES			CONSTRUCTION TYPE CODE		
CODE NO	ITEM	UNIT	TOTAL QUANTITIES		



X0325702 NIGHTTIME WORK ZONE LIGHTING

Rev. 5-27-09

\* SPECIALTY ITEM

FILE NAME =	USER NAME = wlgreendp	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>I-290 (EISENHOWER EXPRESSWAY) SUMMARY OF QUANTITIES</b>	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
c:\pwwork\wlgreendp\02090300.dwg		DRAWN -	REVISED -			290	2009-030 PP	COOK & DUP.	15	3	
PLOT SCALE = 100.0000' / 1" IN.		CHECKED -	REVISED -			CONTRACT NO. 60C29					
PLOT DATE = 3/14/2009		DATE -	REVISED -			FED. ROAD DIST. NO. 1   ILLINOIS   FED. AID PROJECT					