


**SCHEDULE OF QUANTITIES
SIDEWALK REMOVAL (SPECIAL) AND
PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH, SPECIAL**

| LOCATION | SIDEWALK REMOVAL (SPECIAL) SQ FT | PCC SIDEWALK 5 INCH, SPECIAL SQ FT |
|-----------------------|--|--|
| LINCOLN AVENUE, 12+78 | 24 | 24 |
| LINCOLN AVENUE, 13+00 | 64 | 64 |
| LINCOLN AVENUE, 14+49 | 0 | 98 |
| LINCOLN AVENUE, 14+45 | 60 | 0 |
| LINCOLN AVENUE, 17+34 | 120 | 190 |
| LINCOLN AVENUE, 17+45 | 136 | 150 |
| TOTAL | 404 | 526 |

HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT

| LOCATION | AREA (SQ YD) |
|-------------------------------------|--------------|
| LINCOLN AVENUE (STA 10+97) | 80 |
| BEACH WAY (STA 101+62) | 90 |
| CENTER STREET (STA 209+62) | 56 |
| LINCOLN AVENUE (SOUTH) (STA 300+85) | 78 |
| LINCOLN AVENUE (EAST) (STA 400+91) | 63 |
| LINCOLN AVENUE (STA 21+20) | 200 |
| DRIVEWAYS (SEE SCHEDULE) | 208 |
| TOTAL | 775 |

CONSTRUCTION SCHEDULE

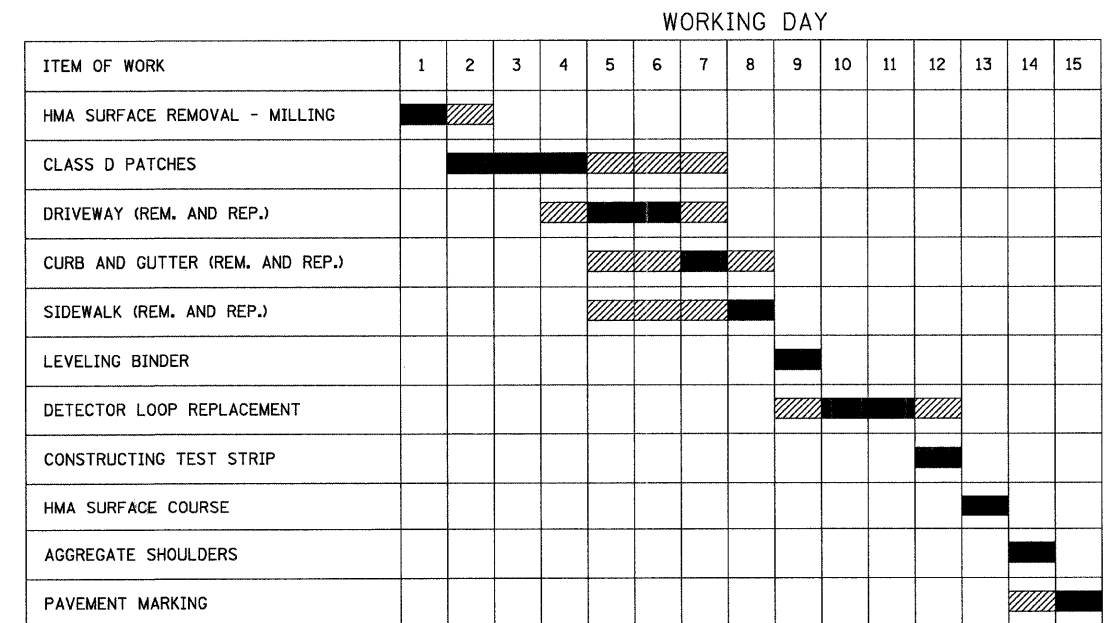

LEGEND

- WORKING DAYS
- ▨ NON-WORKING DAYS (CONSTRUCTION STILL COMPLETED)

COPYRIGHT © 2009 BY BAXTER & WOODMAN, INC.
 STATE OF ILLINOIS - PROFESSIONAL DESIGN FIRM
 4803 G
 3/10/2009 10:55:51 PM
 I:\PROJECTS\080923-LINCOLN AVE STP LAPP\CADD-SURVEY\DRAWINGS\DOCS\080923-SCHEDULE.sht



| | |
|-----------------|--------------------------------|
| DESIGNED - REW | REVISED - IDOT REVIEW 02-09-09 |
| DRAWN - CJC | REVISED - IDOT REVIEW 03-04-09 |
| CHECKED - RWL | REVISED - |
| DATE - 12-12-08 | FILE - 080923-SCHEDULE.sht |

**VILLAGE OF FOX RIVER GROVE, ILLINOIS
LINCOLN AVENUE STP (LAPP)
IMPROVEMENTS**

**SCHEDULE OF QUANTITIES AND
CONSTRUCTION SCHEDULE**

SCALE: NONE STA. TO STA.

| F.A.U. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|--|----------------|---------|--------------------|-----------|
| 0015 | 08-00020-00-R5 | McHENRY | 26 | 8 |
| FED. ROAD DIST. NO. C-91-201-09 | | | CONTRACT NO. 63162 | |
| [ILLINOIS] FED. AID PROJECT M-9003 (167) | | | | |