F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
309	(17R)B	WHITESIDE	376	58
FED. ROAD DIST. NO. 2	ILLINOIS	FED. AID PROJECT		

Contract #64B74

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

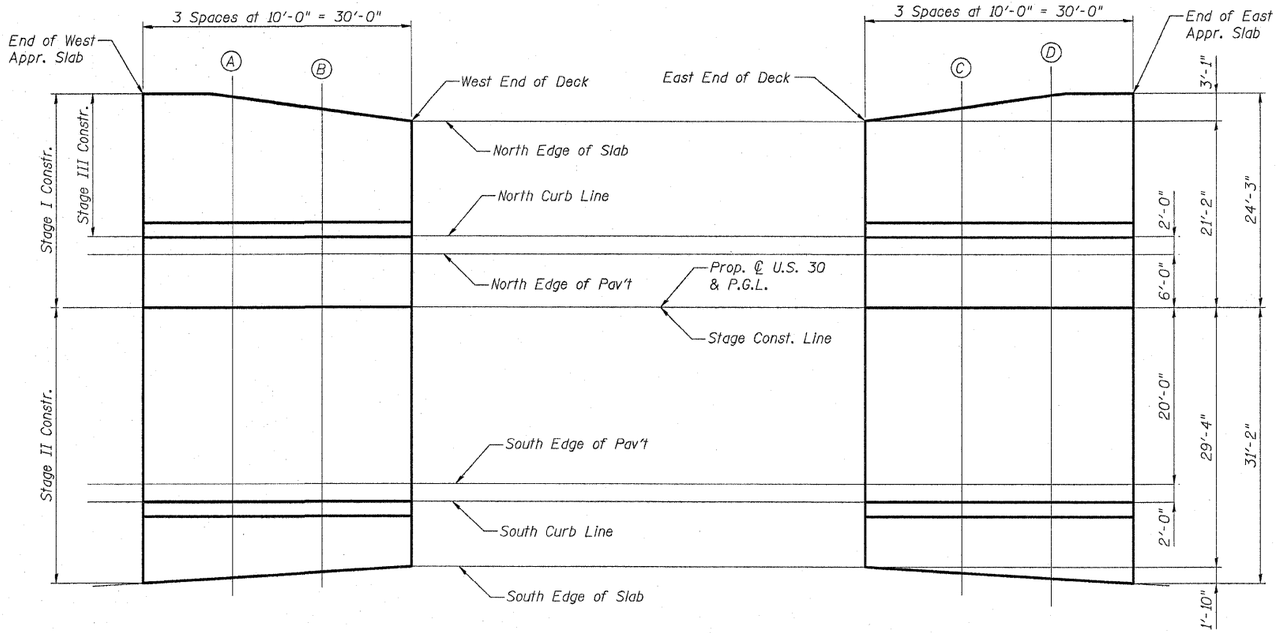

WEST APPROACH SLAB

EAST APPROACH SLAB

NORTH EDGE OF SLAB

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	-24.25	637.49
A	1036+97.27	-24.02	637.22
B	1037+07.27	-22.65	636.99
West End of Deck	1037+17.27	-21.17	636.79
East End of Deck	1038+52.27	-21.17	634.90
C	1038+62.27	-22.65	634.76
D	1038+72.27	-24.02	634.63
End E. Appr. Pav't.	1038+82.27	-24.25	634.53

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	-8.00	637.81
A	1036+97.27	-8.00	637.54
B	1037+07.27	-8.00	637.29
West End of Deck	1037+17.27	-8.00	637.05
East End of Deck	1038+52.27	-8.00	635.16
C	1038+62.27	-8.00	635.05
D	1038+72.27	-8.00	634.95
End E. Appr. Pav't.	1038+82.27	-8.00	634.86

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	20.00	638.37
A	1036+97.27	20.00	638.10
B	1037+07.27	20.00	637.85
West End of Deck	1037+17.27	20.00	637.61
East End of Deck	1038+52.27	20.00	635.72
C	1038+62.27	20.00	635.61
D	1038+72.27	20.00	635.51
End E. Appr. Pav't.	1038+82.27	20.00	635.42

STAGE CONSTRUCTION LINE & PGL

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	0.00	637.97
A	1036+97.27	0.00	637.70
B	1037+07.27	0.00	637.45
West End of Deck	1037+17.27	0.00	637.21
East End of Deck	1038+52.27	0.00	635.32
C	1038+62.27	0.00	635.21
D	1038+72.27	0.00	635.11
End E. Appr. Pav't.	1038+82.27	0.00	635.02

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	-6.00	637.85
A	1036+97.27	-6.00	637.58
B	1037+07.27	-6.00	637.33
West End of Deck	1037+17.27	-6.00	637.09
East End of Deck	1038+52.27	-6.00	635.20
C	1038+62.27	-6.00	635.09
D	1038+72.27	-6.00	634.99
End E. Appr. Pav't.	1038+82.27	-6.00	634.90

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	22.00	638.41
A	1036+97.27	22.00	638.14
B	1037+07.27	22.00	637.89
West End of Deck	1037+17.27	22.00	637.65
East End of Deck	1038+52.27	22.00	635.76
C	1038+62.27	22.00	635.65
D	1038+72.27	22.00	635.55
End E. Appr. Pav't.	1038+82.27	22.00	635.46

SOUTH EDGE OF SLAB

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pav't.	1036+87.27	31.17	638.60
A	1036+97.27	30.60	638.31
B	1037+07.27	29.99	638.05
West End of Deck	1037+17.27	29.33	637.80
East End of Deck	1038+52.27	29.33	635.91
C	1038+62.27	29.99	635.81
D	1038+72.27	30.60	635.72
End E. Appr. Pav't.	1038+82.27	31.17	635.64

TOP OF APPROACH SLAB ELEVATIONS

U.S. RTE. 30/IL RTE. 78 OVER ROCK CREEK
F.A.P. ROUTE 309, SECTION (17R)B
WHITESIDE COUNTY
STATION 1037+84.35
STRUCTURE NO. 098-0113

DATE: December 18, 2008

DRAWN BY: D. Schettler
CHECKED BY: A. Yargicoglu

PATRICK ENGINEERING INC.
LISLE, ILLINOIS

cyargicoglu(Struct1) 12/17/2008 12:27:44 PM n:\lisle\idot\20608_015\work order #1\us 30 over rock creek\drawings\struct\08-ApprElev.dgn