

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	05-00333-00-BT	McLEAN	56	1
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CITY OF BLOOMINGTON, ILLINOIS

CONSTITUTION TRAIL

EXTENSION

FROM CROXTON AVENUE

TO GROVE STREET

McLEAN COUNTY

PROJECT NO. HPP-4070(001)

JOB NO. C-95-325-07

M.F.T. SECTION 05-00333-00-BT




INDEX TO SHEETS

SHEET NO.	TITLE
1	COVER SHEET
2	SUMMARY OF QUANTITIES AND GENERAL NOTES
3-4	TYPICAL CROSS SECTIONS AND LEGEND
5-6	SCHEDULE OF QUANTITIES
7-12	BIKE PATH AND WATER MAIN PLAN AND PROFILES
13-16	STORM SEWER AND SANITARY SEWER PLAN AND PROFILES
17-18	CONNECTOR PLAN AND PROFILES
19	SEGMENTAL CONCRETE BLOCK WALL STA 97+25 TO STA 99+15
20-23	SOUTH RETAINING WALL
24-30	BRIDGE SN 057-6340
31-34	NORTH RETAINING WALL
35-36	EROSION CONTROL PLAN
37-38	MISCELLANEOUS DETAILS
39	STORM AND SANITARY SEWER DETAILS
40	WATER MAIN DETAILS
41-53	BIKE TRAIL CROSS SECTIONS
54-56	OAKLAND AVE AND TAYLOR ST CONNECTOR CROSS SECTIONS

STATE STANDARDS

000001-05	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
280001-04	TEMPORARY EROSION CONTROL SYSTEMS
420401-07	BRIDGE APPROACH PAVEMENT CONNECTOR
424001-05	CURB RAMPS FOR SIDEWALKS
442201-03	CLASS C AND D PATCHES
515001-03	NAME PLATES FOR BRIDGES
602401-02	MANHOLES, TYPE A
602601-02	PRECAST REINFORCED CONCRETE FLAT SLAB TOP
602701-02	MANHOLE STEPS
604001-03	FRAME AND LIDS TYPE 1
606001-04	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
606201-02	TYPE B GUTTER (INLET, OUTLET & ENTRANCE)
664001-02	CHAIN LINK FENCE
701001-02	OFF-RD OPERATIONS, 2L, 2W, MORE THAN 15' AWAY
701006-03	OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701011-02	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701606-06	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701-06	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701801-04	LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
701901-01	TRAFFIC CONTROL DEVICES
B.L.R. 17-4	TRAFFIC CONTROL DEVICES - DAY LABOR CONSTRUCTION
B.L.R. 18-5	TRAFFIC CONTROL DEVICES - DAY LABOR MAINTENANCE

NOTE:
FOR BENCH MARKS
SEE SHEET NO. 3

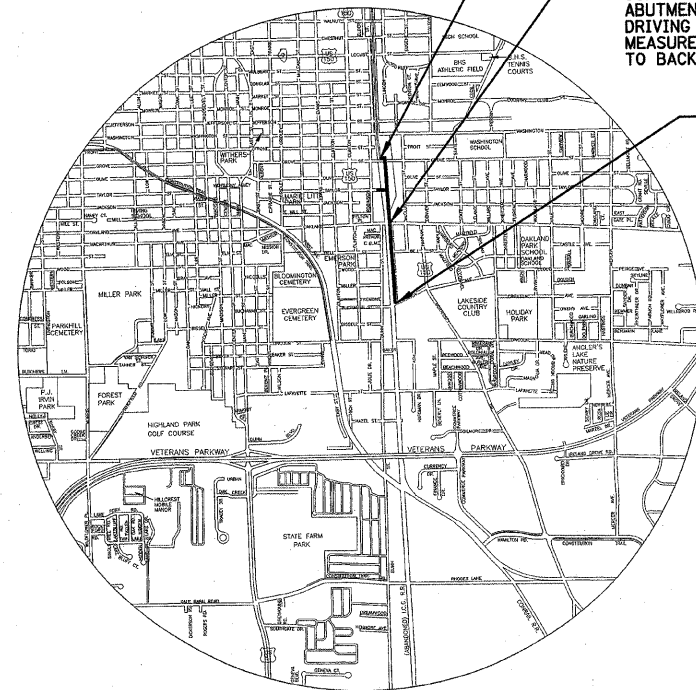

IMPROVEMENT ENDS
STA 124+89.43

PROPOSED STRUCTURE NO. 057-6340
THE PROPOSED BRIDGE SUPERSTRUCTURE IS A
THREE-SPAN PREFABRICATED STEEL BRIDGE
WITH A CAST-IN-PLACE CONCRETE DECK. THE
SUBSTRUCTURE CONSISTS OF SPILL-THRU
ABUTMENTS ON PILES AND PIERS BUILT FROM
DRIVING PILES. THE BRIDGE IS NOT SKEWED,
MEASURES 12'-0" RAIL TO RAIL AND 22'-8" BACK
TO BACK OF ABUTMENTS.

IMPROVEMENT BEGINS
STA 91+74.67
CROXTON AVENUE

Approved MARCH 6 2009
Doug Grovesteen
Doug Grovesteen, Director of Engineering,
City of Bloomington

Passed 3/26 2009
David A. Se...
District #5 Engineer of Local Roads & Streets


Releasing for Bid
Based on Limited
Review 3/26/09
Joseph E. ...
Deputy Director of Highways, Region #3 Engineer

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CITY OF BLOOMINGTON, ILLINOIS
MFT SECTION 05-00333-00-BT

COVER SHEET

DRAWN BY DRR	Farnsworth GROUP 2700 McGraw Drive Bloomington, Illinois 61704 309/893-8436 309/893-8711 fax	FILE NO. 24-8173
DATE 01/30/09		BOOK NO. 2752
CHECKED BY PJM		SHEET NO. 1 OF 56



Philip J. Matone 3/6/09
PHILIP J. MATONE
REGISTERED PROFESSIONAL ENGINEER
NO. 062-034080
EXPIRATION 11/30/09

GROSS LENGTH OF PROJECT = 3,314.76 FEET (0.628 MILES)
NET LENGTH OF PROJECT = 3,314.76 FEET (0.628 MILES)
FUNCTIONAL CLASSIFICATION: BICYCLE/PEDESTRIAN PATH

J.U.L.I.E. NUMBER 1-800-892-0123