


NOTE:  
 PR PCC SIDEWALKS AND RAMPS  
 TO BE 4' WIDE AND 4" THICK.  
 RAMP SLOPES 8.33% (1:12) TYP.  
 COSTS FOR INCIDENTAL EARTHWORK  
 AND SEEDING TO BE INCLUDED IN THE  
 COST FOR PCC SIDEWALK 4".  
 ALL MEASUREMENTS ON CURVES  
 ARE CHORD DISTANCES.

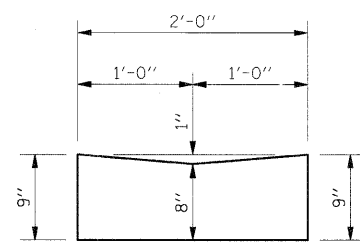

**CONCRETE GUTTER**  
 CONCRETE GUTTER 4' @ RAMP  
 w/ 2' TRANSITION TO EXISTING,  
 8' TOTAL LENGTH EACH.

**BILL OF MATERIALS**

TOTAL PCC SIDEWALK 4"	= 166 SQ FT
TOTAL SIDEWALK REMOVAL	= 64 SQ FT
TOTAL CONCRETE GUTTER	= 16 FT
TOTAL GUTTER REMOVAL	= 16 SQ FT
DETECTABLE WARNING	= 16 SQ FT
SIGN TO BE RELOCATED	= 2 SQ FT

FILE NAME = G:\S07009-01\oad\7009-01.Ent_Detail04.dgn	USER NAME = IE Consultants	DESIGNED -	REVISED -	<b>VILLAGE OF SHERMAN</b>	<b>RAMP SIDEWALK DETAILS</b>				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -							08-00014-00-SW	SANAMON	47	40
		CHECKED -	REVISED -			CONTRACT NO. <b>93486</b>							
		DATE -	REVISED -			SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.	FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT