


FAP #/E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
338	(113 & 114) R-5	WILL	525	351
STA. 3190+00		TO STA. 3204+00		
FED. ROAD DIST. NO.	ILLINOIS	FAP 338 (IL RTE. 59)		



← WORK TO BE COORDINATED WITH CONTRACT NO. 62416 →  
 → WORK TO BE PERFORMED UNDER THIS CONTRACT →

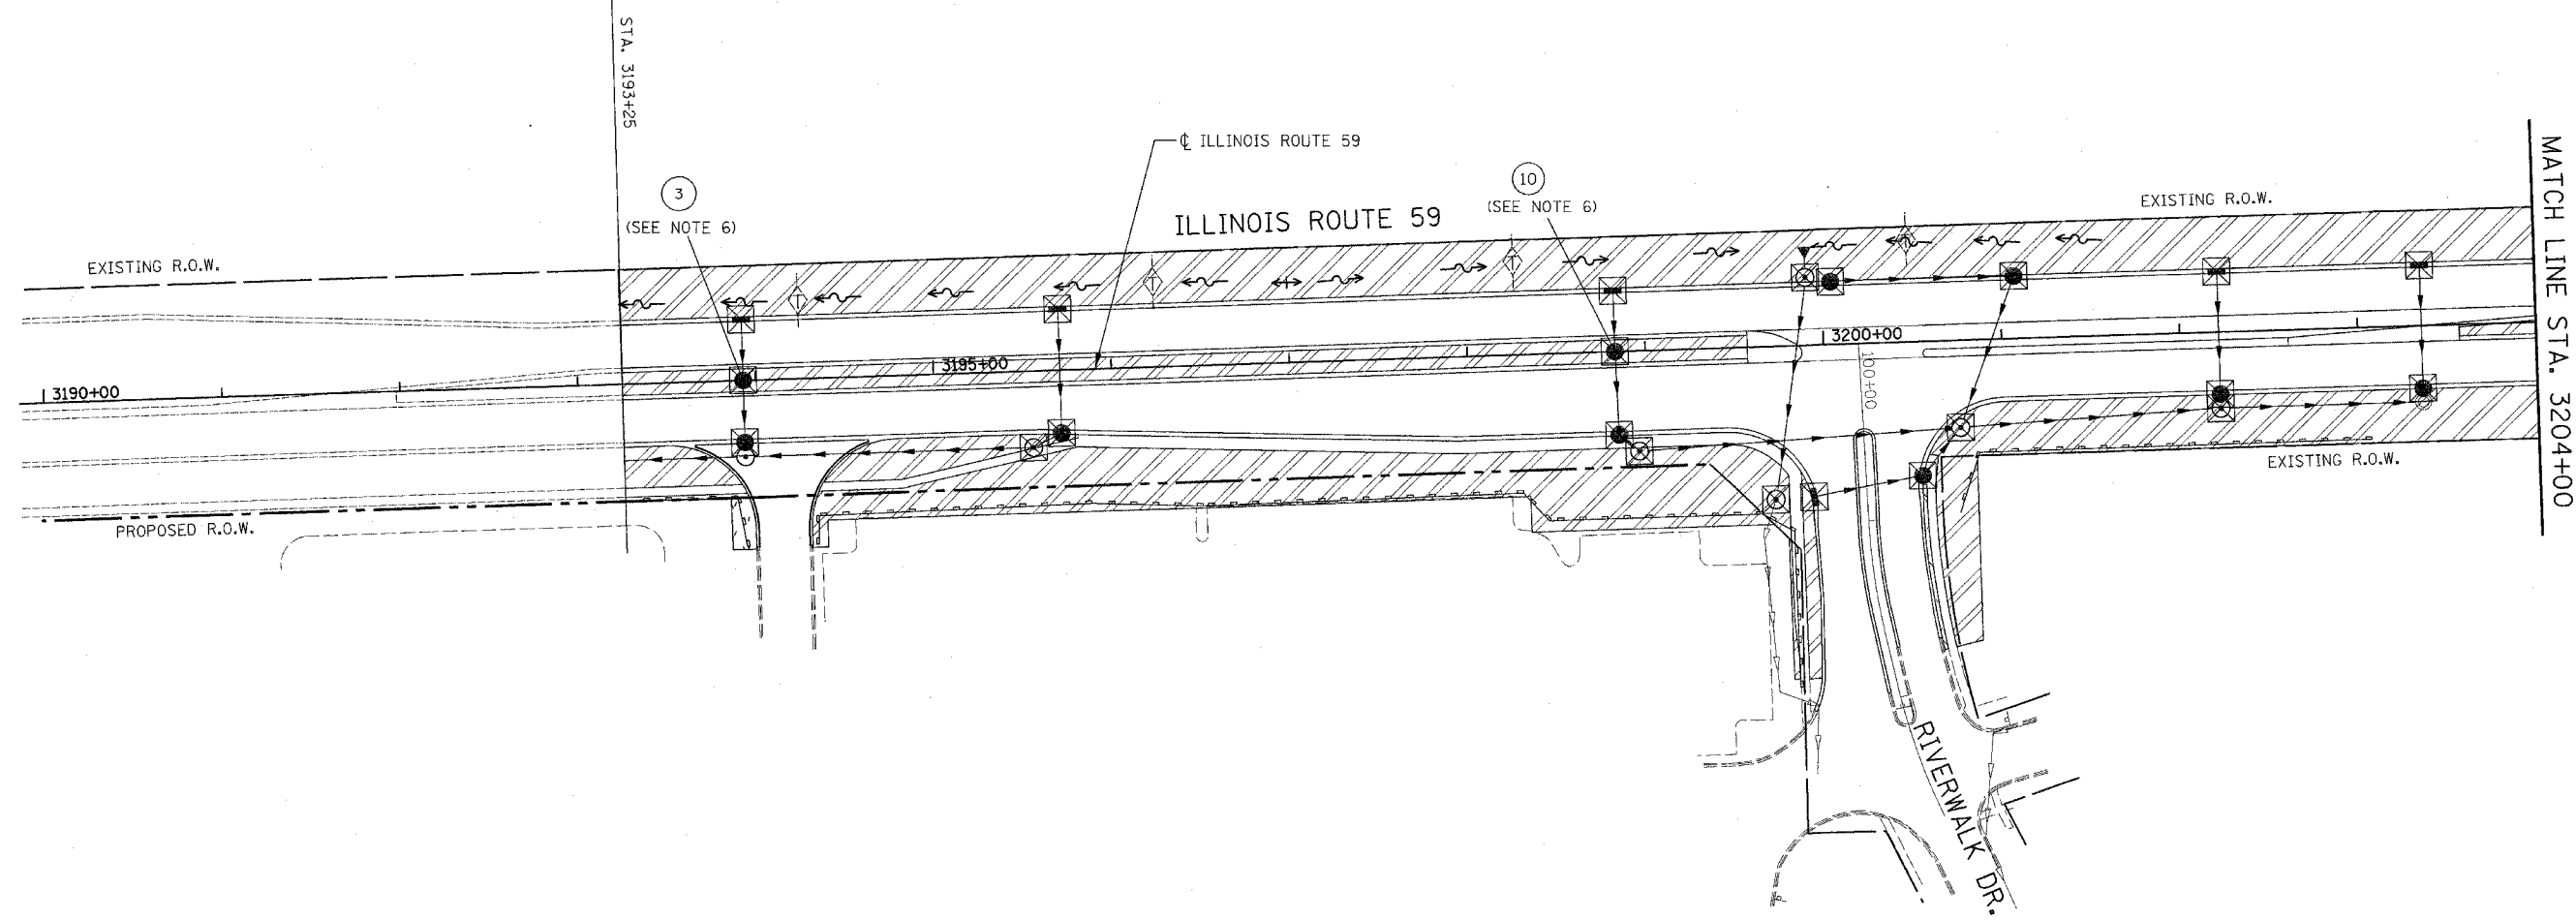

**EROSION CONTROL LEGEND**

- |  |   |  |  |
|--|---|--|--|
|  | TEMPORARY EROSION CONTROL SEEDING AND EROSION CONTROL BLANKET                             |  | TEMPORARY DITCH CHECK                              |
|  | TEMPORARY EROSION CONTROL SEEDING AND EROSION CONTROL BLANKET INSTALLED IN PREVIOUS STAGE |  | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE  |
|  | PERMANENT LANDSCAPING (SEE NOTE 3)  |  | FLOW DIRECTION (SEE NOTE 4)                        |
|  | DRAINAGE STRUCTURE TO BE CLEANED  |  | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 5)   |
|  | SEDIMENT CONTROL, SILT FENCE (SEE NOTE 2)   |  | PROPOSED STORM SEWER (SEE NOTE 5)                  |
|  | SEDIMENT CONTROL SILT FENCE INSTALLED IN PREVIOUS STAGE                                   |  | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE   |
|  | INLET FILTER  |  | TEMPORARY PIPE CULVERT                             |
|  | INLET FILTER INSTALLED IN PREVIOUS STAGE  |  | TEMPORARY PIPE CULVERT INSTALLED IN PREVIOUS STAGE |

**GENERAL EROSION CONTROL NOTES:**

TREE TRUNK PROTECTION, TREE ROOT PRUNING, AND TREE PRUNING WILL BE REQUIRED FOR THIS PROJECT. A REPRESENTATIVE FROM IDOT'S ROADSIDE DEVELOPMENT UNIT WILL DETERMINE LOCATIONS ON SITE AT THE START OF CONSTRUCTION. PAY ITEMS HAVE BEEN INCLUDED IN THE SUMMARY OF QUANTITIES.

THE CONTRACTOR WILL BE REQUIRED TO SUBMIT CERTIFICATION STATEMENT (NPDES ATTACHMENT 6). FULL COMPLIANCE WITH ALL TERMS OF THE NPDES PERMIT MUST BE STRICTLY ADHERED TO.

DRAINAGE STRUCTURE INLET FILTERS ARE TO BE PROVIDED AND MAINTAINED FOR ALL EXISTING AND PROPOSED DRAINAGE STRUCTURE WITHIN THE PROJECT LIMITS AND ALL STRUCTURES NOTED FOR INLET AND PIPE PROTECTION AS DIRECTED BY THE ENGINEER. PAY ITEMS, DETAILS AND SPECIAL PROVISIONS HAVE BEEN INCLUDED IN THE SUMMARY OF QUANTITIES, SPECIAL PROVISIONS, AND PLAN DETAILS FOR THIS WORK.

**NOTES**

1. THE CONSTRUCTION LIMITS WILL BE STAKED BY THE ENGINEER PRIOR TO COMMENCING CONSTRUCTION. THE CONSTRUCTION LIMITS MAY BE ADJUSTED BY THE ENGINEER TO PRESERVE TREES AND NO ADDITIONAL COMPENSATION WILL BE PAID TO THE CONTRACTOR FOR CHANGED CONSTRUCTION LIMITS.
2. SEDIMENT CONTROL, SILT FENCE SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
3. SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
4. SEE STAGE 3 OF THE FINAL CROSS SECTIONS FOR GRADING INFORMATION.
5. SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION.
6. ANY REQUIRED ADJUSTMENT AND/OR RECONSTRUCTION OF THE PROPOSED STRUCTURE TO FINAL RIM ELEVATION SHALL NOT BE PAID FOR SEPARATELY. THE COST FOR THIS WORK SHALL BE CONSIDERED INCLUDED IN THE COST OF THE PROPOSED STRUCTURE.



ILLINOIS DEPARTMENT OF TRANSPORTATION  
 DISTRICT NO. 1 SCHAUMBURG  
 EROSION CONTROL PLAN  
 STAGES 3, 3A, AND 3B  
 ILLINOIS ROUTE 59

SCALE AS SHOWN  
 DATE MARCH 18, 2008  
 DRAWN BY REW  
 CHECKED BY JCM