


GENERAL NOTES:

1. INTERNAL MANHOLE CHIMNEY SEAL CONFORMING ASTM C-923 CRETEX OR APPROVED EQUAL (SANITARY AND COMBINED MANHOLES ONLY)
2. NEW FRAME AND LID (SANITARY):
NEENAH R-1015-2000 FRAME OR APPROVED EQUAL
NEENAH R-1015-2001 SELF SEALING LID OR APPROVED EQUAL
3. NEW FRAME AND LID (STORM):
NEENAH R-1015-2000 FRAME OR APPROVED EQUAL
NEENAH R-1015-2001 LID OR APPROVED EQUAL

NOT TO SCALE

REV:	DATE:	TYPICAL ADJUSTMENT	VILLAGE OF VILLA PARK SANITARY - 06
REV: RMS	DATE: JUL 2004		
DRAWN BY: VV	DATE: JAN 2003		

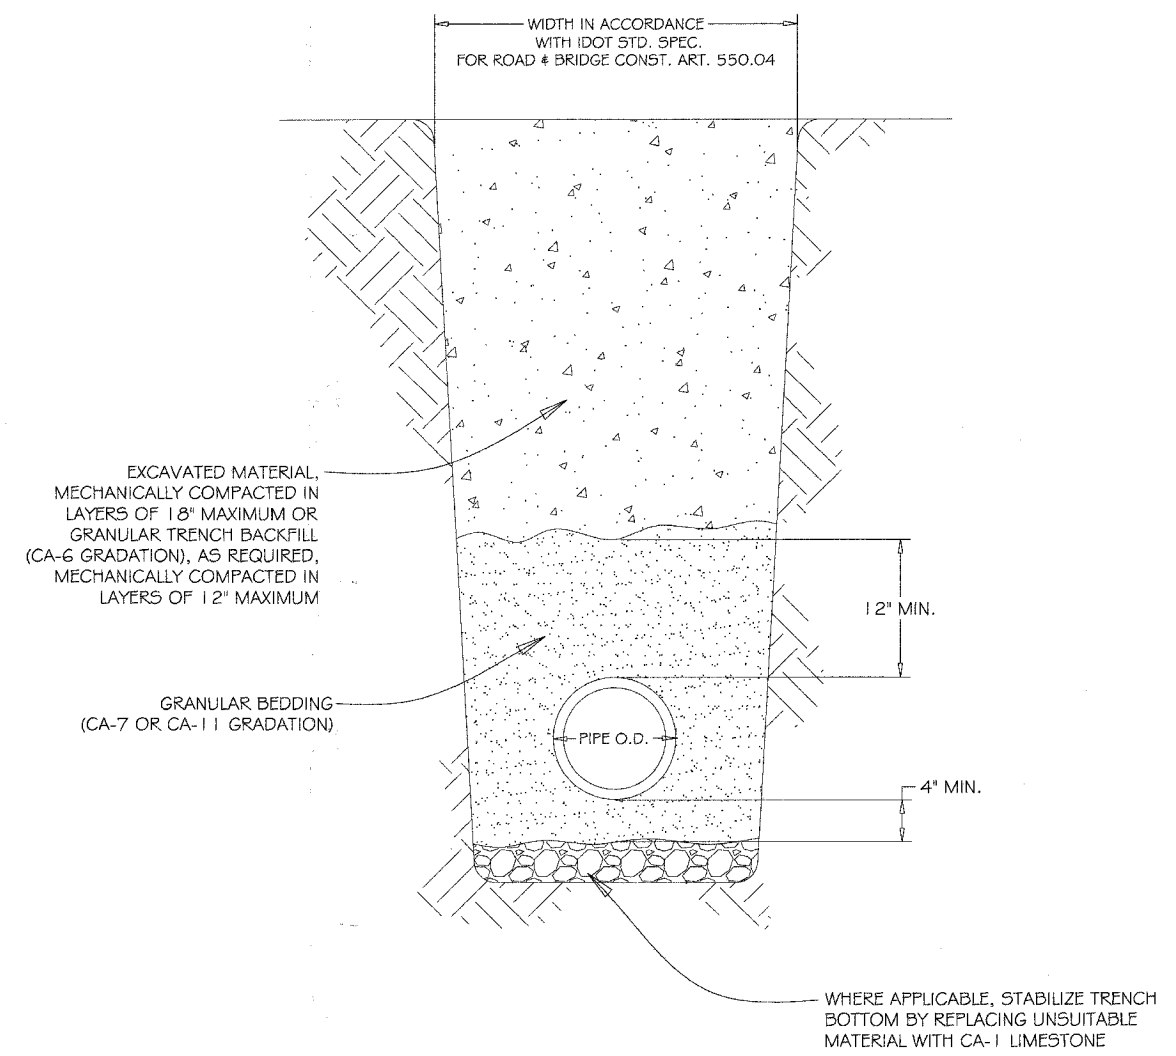

GENERAL NOTES:

1. GRANULAR TRENCH BACKFILL SHALL BE MECHANICALLY COMPACTED IN LAYERS OF 12" MAXIMUM, LOOSE MEASURE, TO 95% OF STANDARD MAXIMUM DENSITY (ASTM D 698)
2. EXCAVATED MATERIAL USED FOR BACKFILL SHALL BE MECHANICALLY COMPACTED IN LAYERS OF 18" MAXIMUM, LOOSE MEASURE, TO 90% OF STANDARD MAXIMUM DENSITY (ASTM D 698)

NOT TO SCALE

REV: KLM	DATE: 10/12/2006	PIPE INSTALLATION	VILLAGE OF VILLA PARK SANITARY - 08
REV: RMS	DATE: 07/2004		
DRAWN BY: VIV	DATE: 01/2003		