




PLAN
NE WING

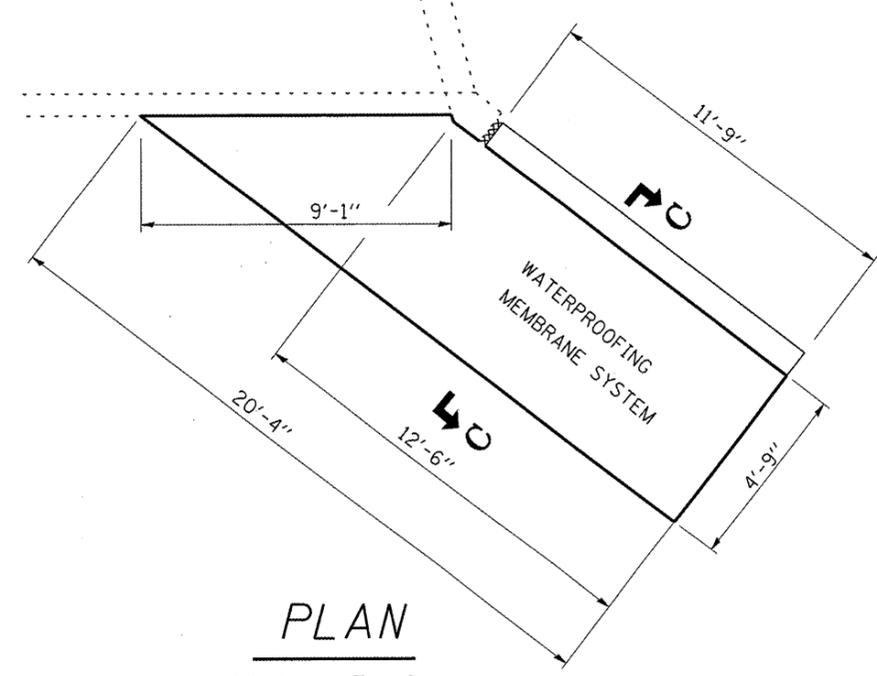

PLAN
SW WING

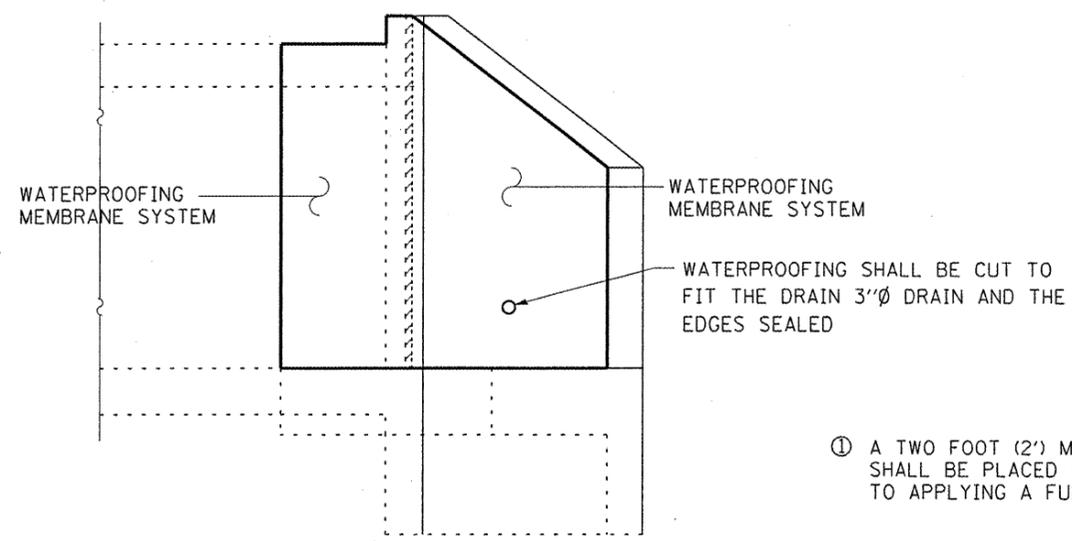


ELEVATION
TYPICAL

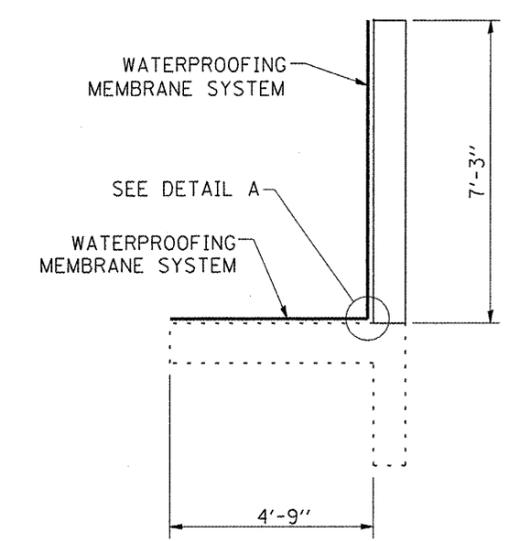

SECTION C-C

① A TWO FOOT (2') MIN WIDTH STRIP OF WATERPROOFING MEMBRANE SHALL BE PLACED CENTERED OVER THE CONSTRUCTION JOINT PRIOR TO APPLYING A FULL PROTECTIVE LAYER TO THE CONCRETE SURFACES.

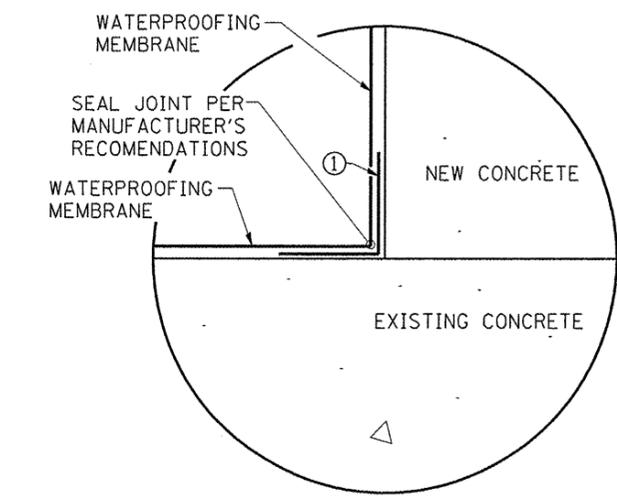

DETAIL A

BILL OF MATERIAL
NE WING

SHEET WATERPROOFING	SQ. YD.	23
MEMBRANE SYSTEM		

BILL OF MATERIAL
SW WING

SHEET WATERPROOFING	SQ. YD.	23
MEMBRANE SYSTEM		

NOTES:

THE EXPOSED SURFACES AS INDICATED SHALL BE PROTECTED BY THE WATERPROOFING MEMBRANE AS PER THE MANUFACTURER'S RECOMENDATIONS.

A MANUFACTURER'S REPRESENTATIVE SHALL BE ON SITE DURING THE INSTALLATION OF THE WATERPROOFING MEMBRANE TO PROVIDE TECHNICAL SUPPORT WHEN REQUIRED. ALL COST INCURRED DUE TO THE ON-SITE REPRESENTATIVE SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE UNIT COST OF THE WATERPROOFING MEMBRANE WORK.

THE CONTRACTOR SHALL INSTALL THE WATERPROOFING MEMBRANE ACCORDING TO THE MANUFACTURER'S RECOMMENDATIONS, PLAN DETAILS AND AS DIRECTED BY THE ENGINEER.

FILE NAME =	USER NAME = carpenterdj	DESIGNED - R..WOODSHANK	REVISED -
c:\projects\omair09\com306\details.dgn		DRAWN - R..WOODSHANK	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SHEET WATERPROOFING MEMBRANE DETAILS
SCALE: SHEET NO. 4 OF 4 SHEETS STA. TO STA.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
296	(G,F)I	GRUNDY	11	10
FED. ROAD DIST. NO. - ILLINOIS			CONTRACT NO. 66742	