

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	STATE SHEETS	SHEET NO.
FA 623	*	LA SALLE	5	5
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

Contract Number: 66816  
\* (H-BR-D1)

SHEET NO. 1  
1 SHEETS

\* Contractor is to verify beam length prior to ordering material. Other sections meeting the section modulus requirements shown may be allowed subject to approval by the Bureau of Bridges and Structures, however, no additional payment will be allowed if the contractor chooses a heavier steel section than the one specified in the plans. Maximum girder depth = 24", Min. Sx = 127 in<sup>3</sup>.

**GENERAL NOTES**

All structural steel shall conform to AASHTO Classification M-270 Gr. 36, unless otherwise noted.

Plan dimensions and details relative to existing plans are subject to routine variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished based upon the unit price bid for the work.


See Section 584 of the Standard Specifications for Epoxy Grouting of Threaded Rods.

The cost of epoxy grouting threaded rods shall be included with Furnishing and Erecting Structural Steel.


The Contractor has the option of using used steel. See special provisions.

The contractor is advised that the existing PPC Deck Beams are in a deteriorated condition with reduced load carrying capacity. It is the contractor's responsibility to account for the condition of the beams when developing construction procedures.


If the contractor's procedure for placement of beams involves placement of cranes or other heavy equipment on the bridge, a detailed procedure shall be submitted to the Engineer for approval. The procedure shall include calculations, prepared and sealed by an Illinois Licensed Structural Engineer, verifying that the equipment and procedure used will not overstress the existing beams. To distribute load to multiple beams and protect the existing surface, in all cases a double layer mat of heavy timbers shall be used at all times under crane tracks or wheels and any outriggers in the down position. If necessary, shims shall be used under the crane mat to ensure uniform contact with the underlying beams.

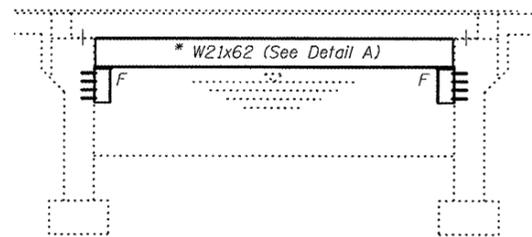


**ELEVATION**

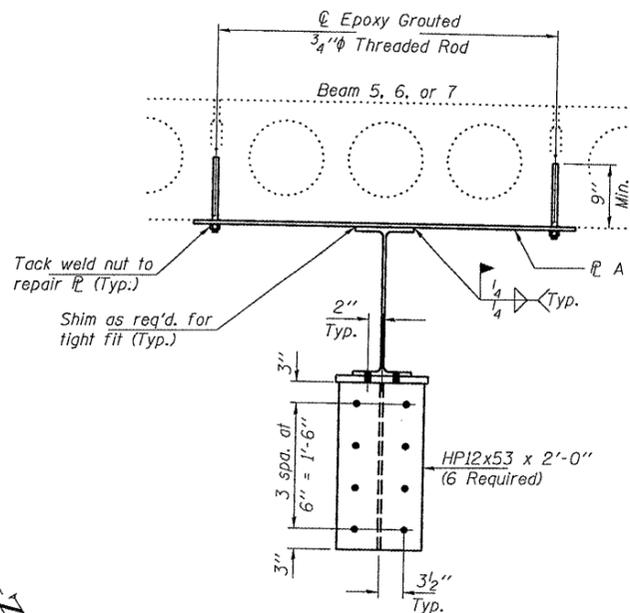


**TYPICAL SECTION THRU SUPPORTED BEAM**

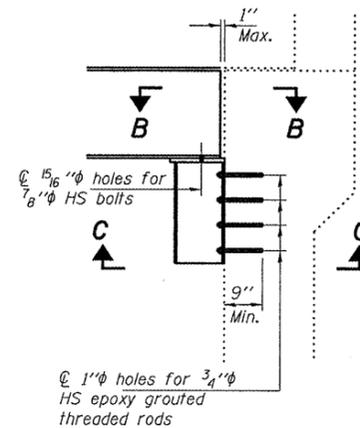


**SECTION A-A**

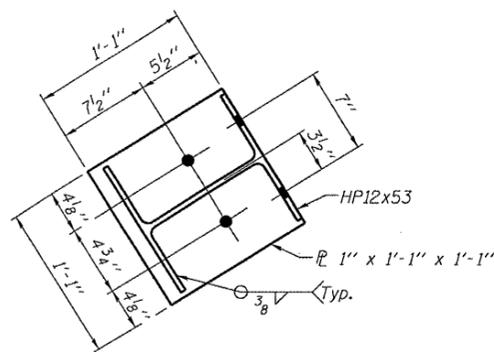


**SECTION C-C**

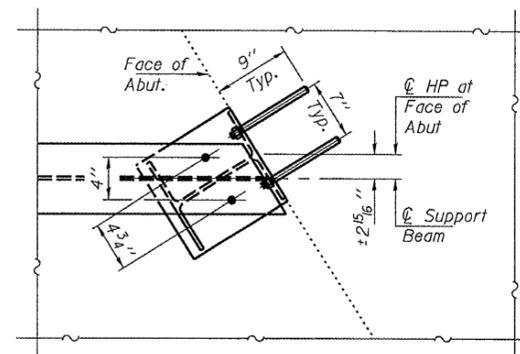

**SECTION B-B**

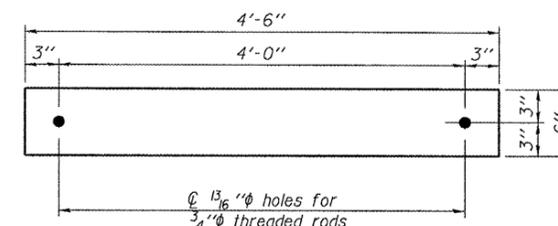


**TRANSVERSE TIE P A**  
P 1/2" x 4'-6" x 6" (3 Req'd)

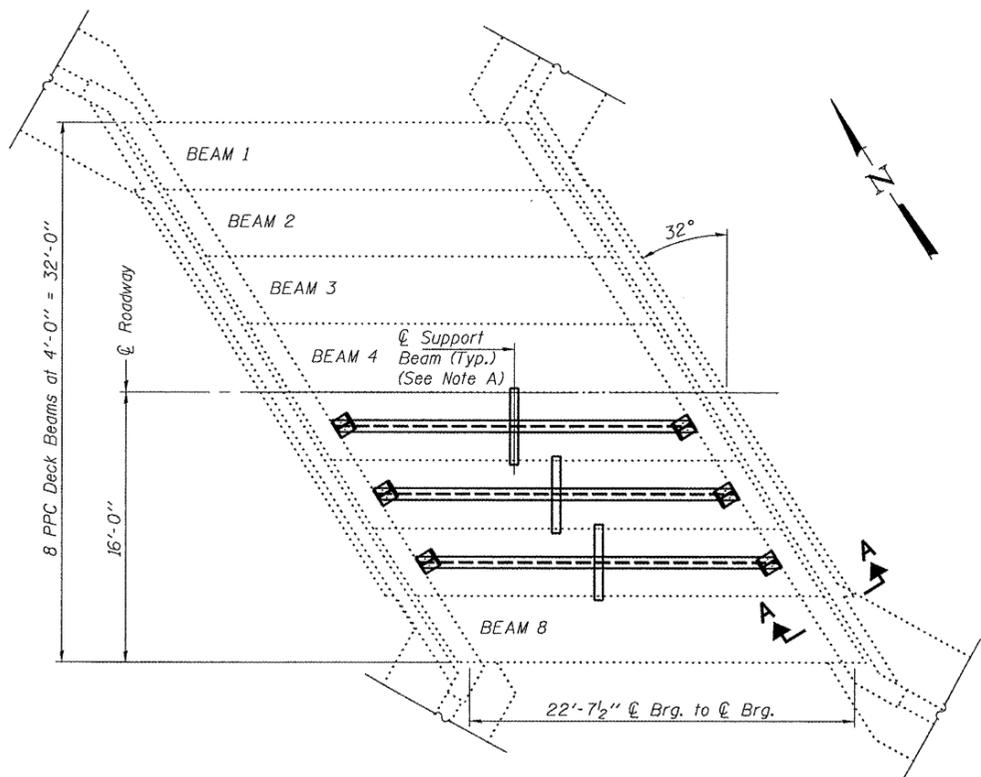

**PLAN**

Note A:  
Transverse tie P's (1 per span). Place additional shims at midpoints between tie P's. Securely weld shims to top flange of support beam. Minimum shim size is 6" x flange width.

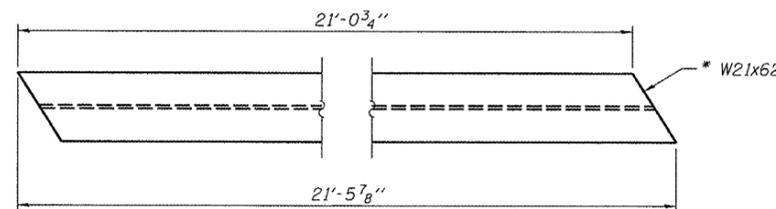

**DETAIL A**  
W21x62 x 21'-5 7/8"  
(3 Required)

**TOTAL BILL OF MATERIAL**

ITEM	UNIT	QUANTITY
Furnishing and Erecting Structural Steel	Pound	5130

**PLAN AND ELEVATION**  
**FA 623**  
**LA SALLE COUNTY**  
**SN 050-0183**

DESIGNED	Victor H. Veliz
CHECKED	Dorena Balora
DRAWN	Steffen
CHECKED	UHV OAB

APRIL 17, 2008	
EXAMINED	Ralph E. Anderson
PASSED	Ralph E. Anderson

Expires: November 30, 2008