


SEE DETAIL "A"



DETAIL "A"
N.T.S.

- NOTES:**
1. ALL (7) EXISTING WELLS ARE TO BE REMOVED, INCLUDING EXTENDED WELL CASING AND RISER PIPES, REMOVAL OF EXISTING VAULT TOPS AND SIDES, FILLING EXISTING VAULTS, NEW PUMPS/MOTORS, AND NEW CONDUITS/WIRES TO ALL (7) WELLS.
 2. NEW PIEZOMETERS SHALL BE CONSTRUCTED WITHIN 5 FOOT RADIUS FROM EACH WELL.
 3. ALL (7) EXISTING PIEZOMETERS SHALL BE SEALED. EXISTING VALVE PITS AND GATE VALVES (WV) SHALL BE REMOVED

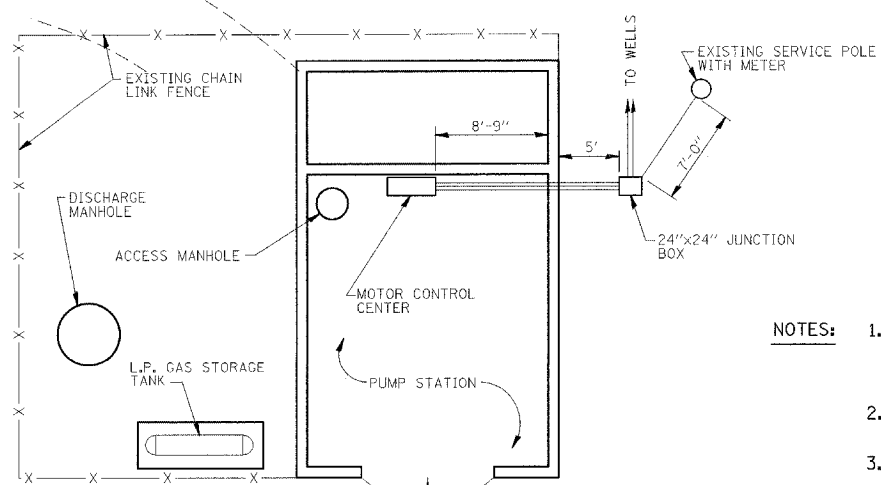

FILE NAME =	USER NAME = potelbw	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SITE PLAN			F.A.P. RTE. 788	SECTION 27T-7	COUNTY MADISON	TOTAL SHEETS 9	SHEET NO. 4
c:\projects\ed02308\electrical\sp1n023083test.dgn	PLOT SCALE = 20,0000' / IN.	DRAWN -	REVISED -		SCALE:	SHEET NO.	OF SHEETS	STA.	TO STA.	CONTRACT NO. 76B51		
	PLOT DATE = 3/19/2008	CHECKED -	REVISED -		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							
		DATE -	REVISED -									