

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2360	04-00058-09-FP	WOODFORD	9	

INDEX OF SHEETS


SHEET NO.	DESCRIPTION
1	COVER SHEET
2	SCHEDULE OF QUANTITIES
3	PROPOSED TYPICAL SECTIONS
4	DETAIL SHEET
5	MISC DETAIL
6-9	PLAN SHEETS

IDOT HIGHWAY STANDARDS

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 630001-07 STEEL PLATE BEAM GUARDRAIL
- 631011-04 TRAFFIC BARRIER TERMINAL, TY. 2
- 635006-02 REFLECTOR AND TERMINAL MARKER PLACEMENT
- 635011-01 REFLECTOR MARKER AND MOUNTING DETAILS
- 701006-02 OFF ROAD OPERATIONS, 2L, 2W, 15' TO 24' FROM EDGE OF PAVEMENT
- 701201-02 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS >=45MPH
- 701301-02 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATION
- 701306-01 LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATION, DAY ONLY, >=45 MPH
- 701901 TRAFFIC CONTROL DEVICES
- 781001-02 TYPICAL APPLICATION, RAISED REFLECTIVE PAVEMENT MARKINGS
- BLR22-5 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
- BLR 23-2 TRAFFIC BARR. TERMINAL, TY 1
- BLR 24-1 MAIL BOX TURNOUT FOR LOCAL ROADS
- BLR 26 STEEL PLATE BEAM GURAD RAIL
- BLR 27 TRAFFIC BARRIER TERMINAL, TY 5A

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PLANS FOR PROPOSED
LOCAL AGENCY IMPROVEMENT
FEDERAL-AID SECONDARY PROJECT**


STU PROGRAM
F.A.S. ROUTE 2360 (SANTA FE TRAIL)
COUNTY HIGHWAY #25
PROJECT NO. M-5093(134)
JOB NO. C-94-043-08
SECTION 04-00058-09-FP
WOODFORD COUNTY

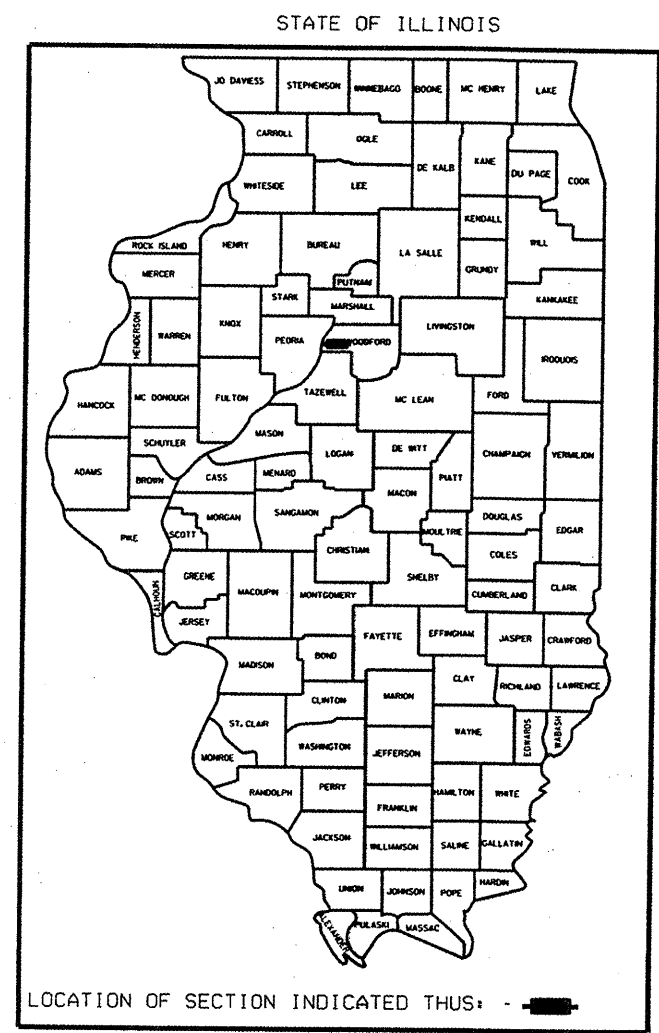

SUMMARY OF QUANTITIES

ITEM #	DESCRIPTION	UNIT	QUANTITY
40200800	AGGREGATE SURFACE COURSE, TY. B	TON	976
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	3,122
40600300	AGGREGATE (PRIME COAT)	TON	71
40600895	CONSTRUCTING TEST STRIP	EACH	3
40600892	HOT-MIX ASPHALT SURFACE REMOVAL- BUTT JOINT	SO YD	1,999
40600990	TEMPORARY RAMP	SO YD	192
40603080	HOT-MIX ASPHALT BINDER COURSE, IL 19.0, N50	TON	6,767
40603310	HOT-MIX ASPHALT SURFACE COUSE, MIX "C", N50	TON	4,287
40603510	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	4,034
* 4080050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	335
48101200	AGGREGATE SHOULDERS, TY. B	TON	6,228
* 63301210	REMOVE AND RE-ERECT STEEL PLATE BEAM GUARDRAIL, TY. A	FOOT	5,587.5
* 63301990	REMOVE AND RE-ERECT TRAFFIC BARRIER TERMINAL, TY 1	EACH	29
* 63302000	REMOVE AND RE-ERECT TRAFFIC BARRIER TERMINAL, TY 2	EACH	6
* 63302500	REMOVE AND RE-ERECT TRAFFIC BARRIER TERMINAL, TY. 5 A	EACH	4
67100100	MOBILIZATION	L SUM	1
* 70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKINGS	FOOT	6,747
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SO FT	2,249
* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	280
* 78200455	BIDIRECTIONAL GUARD RAIL REFLECTORS	EACH	76


SEE SPECIAL PROVISIONS
* SPECIALTY ITEM

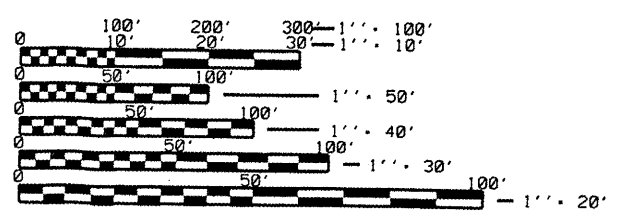

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 89489

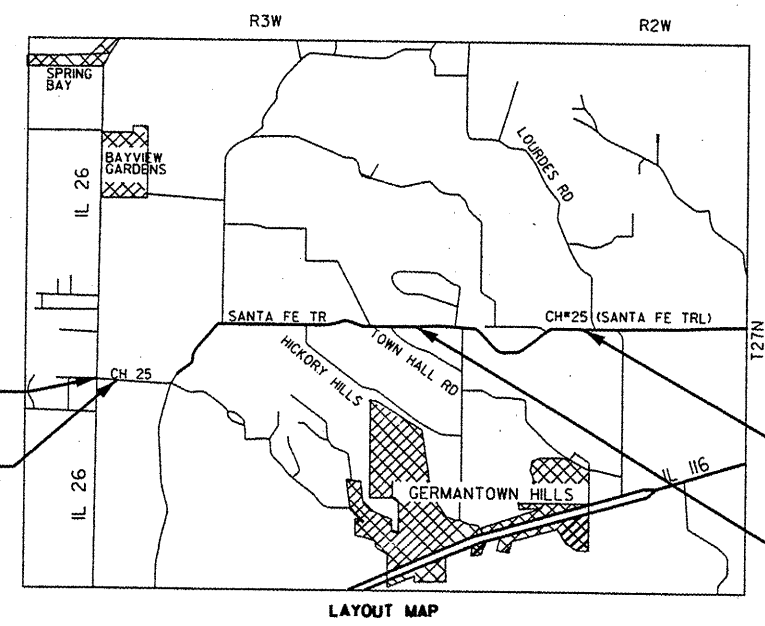

BEGIN IMPROVEMENT
STA. 10+12

BRIDGE OMISSION
STA. 19+91

OMMISSIONS

BRIDGE OMISSION (STRUCTURE # 102-3061)
STA. 19+91 TO STA. 20+64, 73 FEET

BRIDGE OMISSION (STRUCTURE # 102-3156)
STA. 161+66 TO STA. 162+28, 62 FEET

END IMPROVEMENT
STA. 235+00

BRIDGE OMISSION
STA. 161+97

DESIGN INFORMATION:

LOCAL ROADS FUNCTIONAL CLASS:
MAJOR COLLECTOR
2018 ADT = 1820 (7% TRUCKS)
DESIGN SPEED: 40 MPH
DESIGN GUIDELINES: URBAN
VARIANCES GRANTED: NONE
COMMITMENTS: NONE

UTILITIES
(TO BE DETERMINED)

GROSS LENGTH OF SECTION 22,488 FT.
NET LENGTH OF SECTION = 22,353 FT. (4.23 MI)



APPROVED March 19 20 08
Dennis Bachman
COUNTY ENGINEER

PASSED March 24 20 08
Dennis Bachman
DISTRICT FOUR ENGINEER OF
LOCAL ROADS & STREETS

Releasing For
Bid Based on
Limited Review

March 24 20 08
Joseph E. Crowe
DEPUTY DIRECTOR OF HIGHWAYS,
REGION THREE ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PLANS DEVELOPED IN ACCORDANCE WITH
THE IDOT LOCAL ROADS MANUAL (APRIL 2005)

THESE PLANS HAVE BEEN PREPARED BY OR UNDER THE DIRECTION OF:

DATE: March 19, 2008

SIGNED: Dennis Bachman

LICENSE EXPIRES: NOVEMBER 30, 2009



PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

**WOODFORD COUNTY
HIGHWAY DEPARTMENT**
DENNIS BACHMAN, P.E., COUNTY ENGINEER
301 S. Main St.
Raanoke, IL 61561
TEL: 309-923-2891
FAX: 309-923-7928