

CO. HWY.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
13	05-00130-14-RS	MCLEAN	5	1
FED. ROAD DIST. NO. 5 ILLINOIS			FED. AID PROJECT	

INDEX OF SHEETS

- Cover Sheet
- Typical Cross Sections
- Details
- Intersection Detail (CH 13 & RT 24)
- CH 13 Alignment Diagram

STATE STANDARD DETAILS

606001-03	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701001-01	OFF-RD OPERATIONS, 2L, 2W, MORE THAN 15' AWAY
701006-02	OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701011-01	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701201-02	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701301-02	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701306-01	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS > 45 MPH
701901	TRAFFIC CONTROL DEVICES
BLR 21-7	TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION OF RURAL HIGHWAYS
BLR 22-5	TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS (TWO LANE TWO WAY RURAL TRAFFIC) (ROAD CLOSED TO THRU TRAFFIC)

SUMMARY OF QUANTITIES

ITEM NUMBER	ITEM	UNIT	QUANTITY
* 20200100	EARTH EXCAVATION	CU YD	290
* 21001000	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	SQ YD	645
35102000	AGGREGATE BASE COURSE, TYPE B 8"	SQ YD	645
35501308	HOT-MIX ASPHALT BASE COURSE, 6"	SQ YD	580
* 40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	21,000
* 40600300	AGGREGATE (PRIME COAT)	TON	550
* 40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	4,550
40600982	HOT-MIX ASPHALT SURFACE REMOVAL-BUTT JOINT	SQ YD	667
40600990	TEMPORARY RAMP	SQ YD	69
40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	12,000
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	7,600
* 40800010	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	200
* 40800030	AGGREGATE (PRIME COAT)	TON	10
* 40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	350
44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	128
* 44300300	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	SQ YD	102,881
* 48101200	AGGREGATE SHOULDERS, TYPE B	TON	8,000
* 60609800	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-6.18	FOOT	130
67100100	MOBILIZATION	L SUM	1
Δ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	484

* SEE SPECIAL PROVISIONS



Δ SPECIALTY ITEMS

THESE PLANS ARE NOT TO SCALE

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 91387

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PLANS FOR PROPOSED
MCLEAN COUNTY
FEDERAL AID SECONDARY (STP-SR)
COLFAX-WESTON RD (CH 13)
F.A.S. ROUTE 349 SECTION 05-00130-14-RS
PROJECT #RS-349(113)
JOB #C-95-308-08

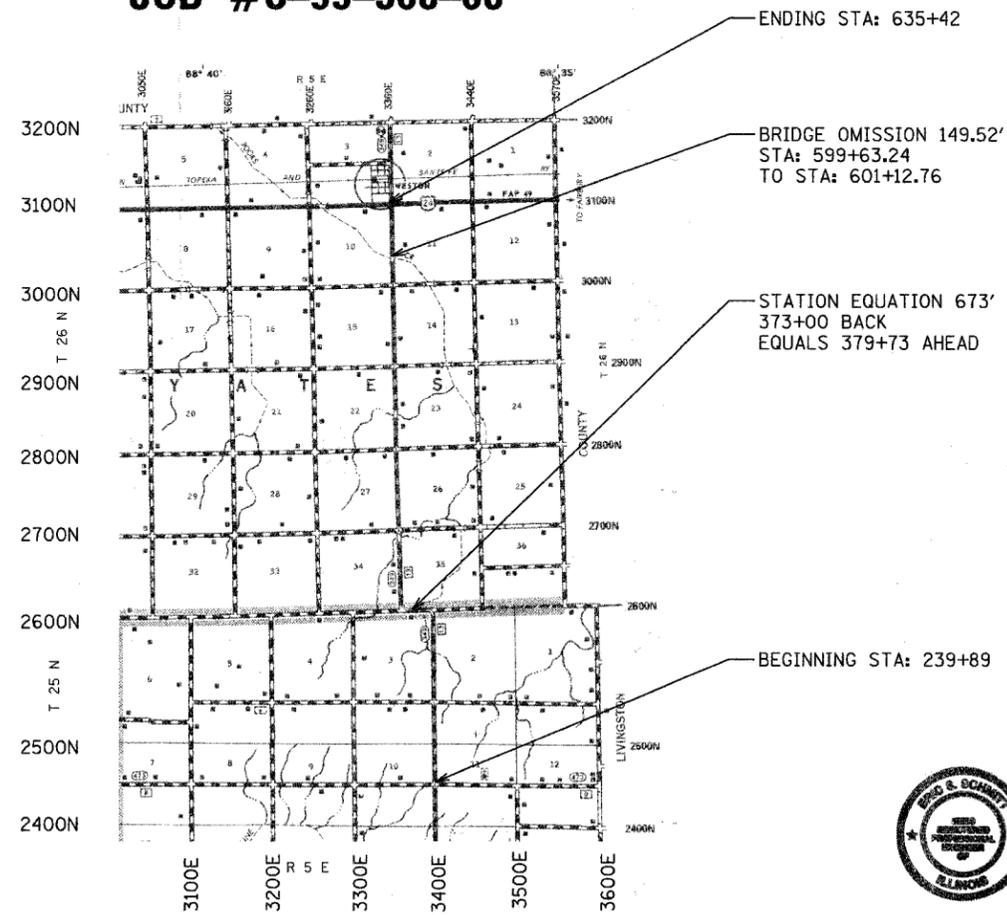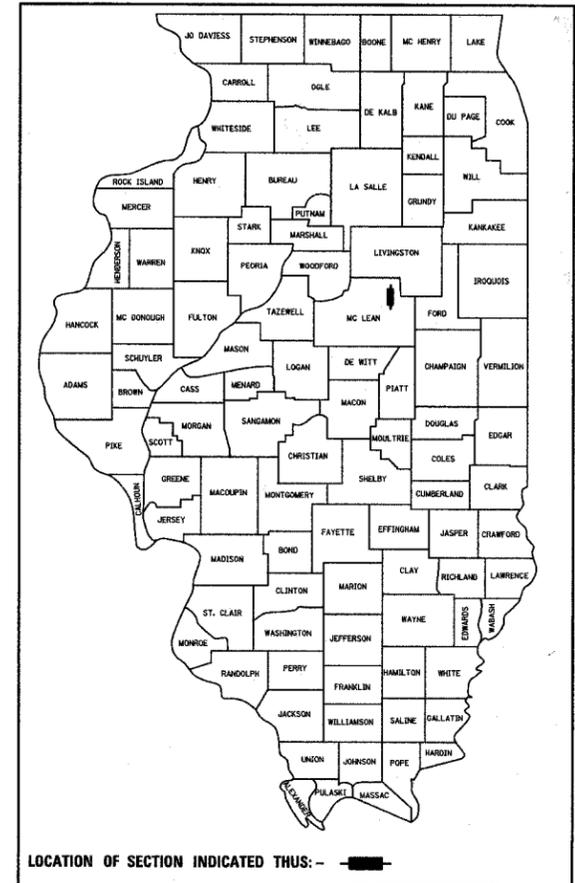

- NOTE: THE TOTAL LENGTH OF THE PROPOSED PROJECT IS 38,880 FEET WITH A NET LENGTH OF 38,730.48 FEET (7.335 MILES)
- NOTE: THESE PLANS MEET THE MINIMUM REQUIREMENTS FOR A 3R IMPROVEMENT.
- NOTE: CURRENT ADT: 725
FUNCTIONAL CLASSIFICATION: MAJOR COLLECTOR
- NOTE: THE PLANS FOR SECTION 05-00130-14-RS ARE THOSE AS APPROVED IN SECTIONS T-MFT (1931) AND TX (1938)



E. J. Schmitt 3/21/2008
ILLINOIS PROFESSIONAL ENGINEER #55820
EXPIRES 11-30-09

McLEAN COUNTY HIGHWAY DEPARTMENT	
APPROVED	3-21-08 <i>Joe Miller</i> COUNTY ENGINEER
PASSED	3/24-08 <i>Dale S.</i> DISTRICT FIVE ENGINEER OF LOCAL ROADS & STREETS
Releasing For Bid Based on Limited Review	3/25-08 <i>Joseph E. Long</i> DEPUTY DIRECTOR OF HIGHWAYS, REGION THREE ENGINEER
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	