


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED HIGHWAY PLANS

**VARIOUS ROUTES
SECTION DIST 8 ITS 2026-1
MAINTAIN & SERVICE
ALL ITS EQUIPMENT
VARIOUS COUNTIES**

C-98-195-24

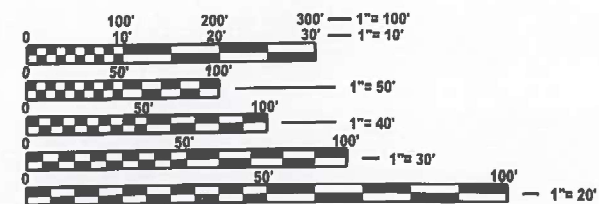

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.



J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

PROJECT ENGINEER: CHERYL KEPLAR
PROJECT MANAGER: RICHARD BARBEE

CONTRACT NO. 76R61

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	DIST 8 ITS 2026-1	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 76R61	

D-98-107-24

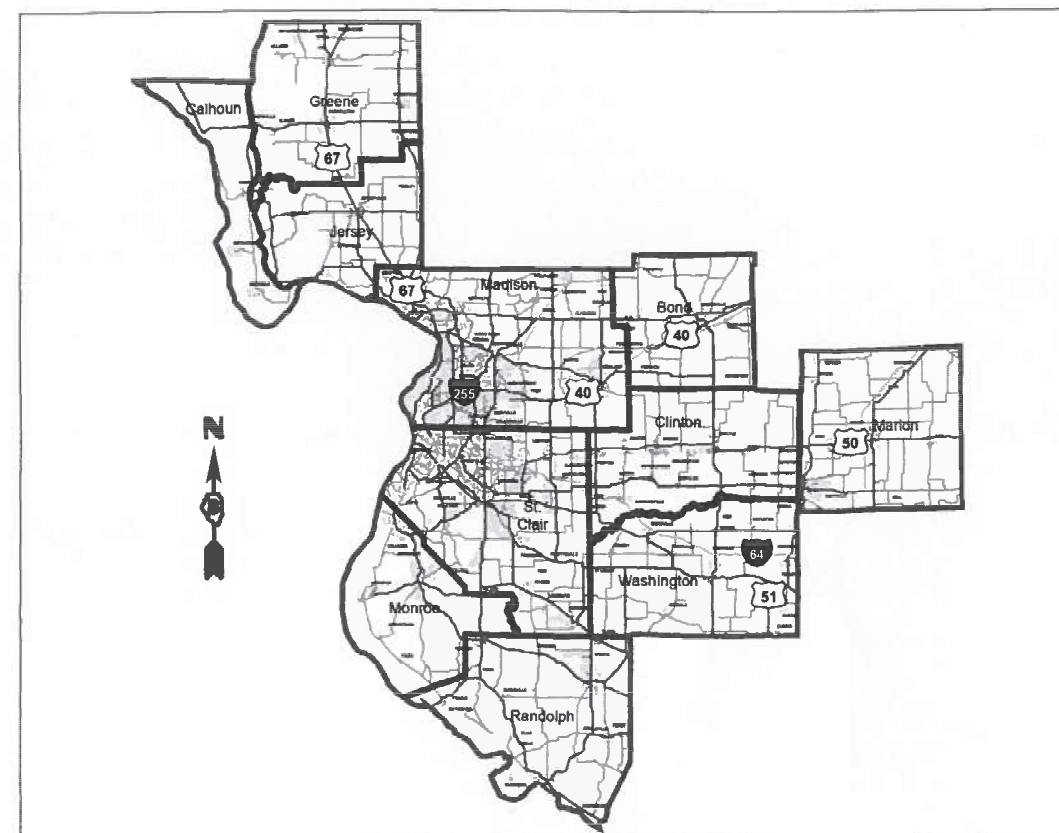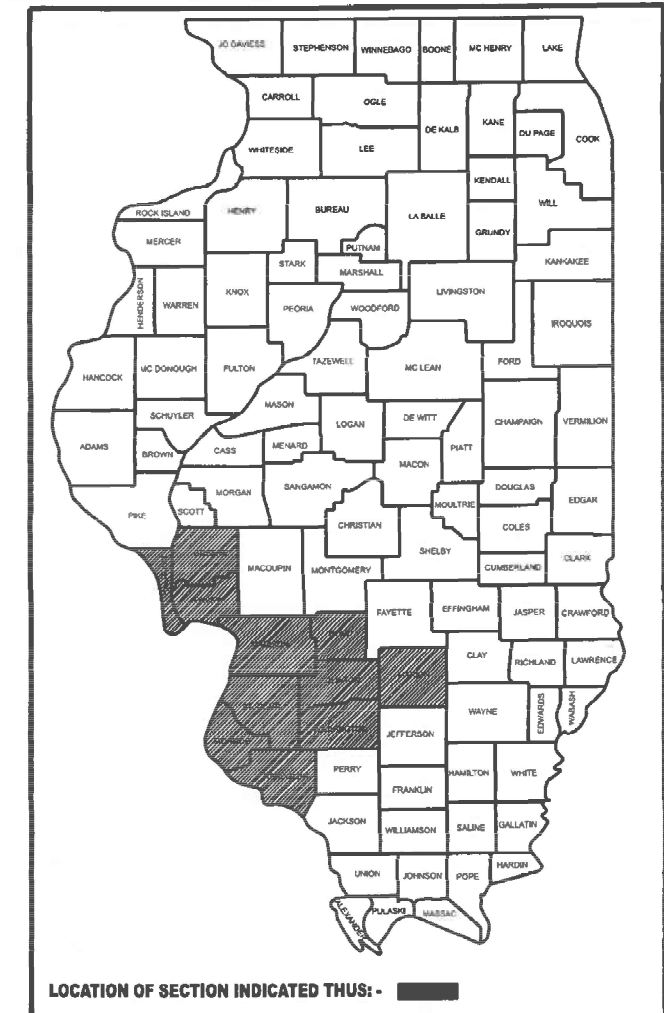

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 20, 2025
Lora Remy REGIONAL ENGINEER

May 9, 2025
Scott A. Etkin ENGINEER OF DESIGN AND ENVIRONMENT

May 9, 2025
Cheryl Keplar DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

1- COVER SHEET
2- INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES, AND COMMITMENTS
3- SUMMARY OF QUANTITIES

701001-02	OFF-ROAD OPERATIONS, 2L, 2W, MORE THAN 15' (4.5 M) AWAY
701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15' (4.5 M) TO 24; (600 MM) FROM PAVEMENT EDGE
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 M) AWAY
701201-05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS ≥ 45 MPH
701206-05	LANE CLOSURE, 2L, 2W, NIGHT ONLY, FOR SPEEDS ≥ 45 MPH
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701401-13	LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701421-08	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY, FOR SPEEDS ≥ 45 MPH TO 55 MPH
701422-10	LANE CLOSURE, MULTILANE, FOR SPEEDS ≥ 45 MPH TO 55 MPH
701446-11	TWO LANE CLOSURE, FREEWAY/EXPRESSWAY
701451-05	RAMP CLOSURE FREEWAY/EXPRESSWAY
701456-05	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701601-09	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
701606-10	URBAN SINGLE LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701901-10	TRAFFIC CONTROL DEVICES

- 1. THE LOCATION OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER / DEPARTMENT.**
- 2. NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON-WORKING HOURS.**
- 3. ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR, APPROPRIATE STANDARDS ARE LISTED.**
- 4. A FLAGGER SHALL BE REQUIRED AT ALL TIMES WHEN WORKERS OR EQUIPMENT ARE ENCROACHING ON THE LANE OF TRAFFIC.**
- 5. 45 AND 55 MPH SIGNS ARE INCLUDED IN ALL INTERSTATE LANE CLOSURE TRAFFIC CONTROL AND PROTECTION. IF THE LANE CLOSURE DURATION IS LESS THAN 4 HOURS, THE 45 AND 55 MPH SIGNS ARE NOT REQUIRED.**
- 6. ANY WORK ORDER MAY BE CANCELED AT THE ENGINEER'S / DEPARTMENTS DISCRETION.**
- 7. NO OVERNIGHT LANE CLOSURES WILL BE ALLOWED.**

NONE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.
--------	---------	------	--------	------	---------

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	DIST 8 ITS 2026-1	VARIOUS	3	2
		CONTRACT NO. 76R61		
		ILLINOIS FED. AID PROJECT		

MODEL: 76R61 General Notes [Sheet]
FILE NAME: c:\pw\work\pwido\daniel.hopkins@illinois.gov\1042585\ID876R61-sht-gennotes.dgn

MODEL: SQQ [Sheet]
FILE NAME: c:\pwwork\pwwork\daniel.hopkins@illinois.gov\1042565\0876R61-sht-SQQ.dgn

				CONSTR. CODE
				100% STATE
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	NONE 0021 URBAN
X0323916	CABINET, MODEL 332	EACH	2	2
X8300355	CAMERA POLE, 55 FT	EACH	1	1
X8710302	FIBER OPTIC CABLE SPLICE	EACH	4	4
XP000001	JOURNEYMAN ELECTRICIAN	HOURL	2100	2100
XP000002	APPRENTICE ELECTRICIAN	HOURL	300	300
XP000003	JOURNEYMAN ELECTRICIAN (WEEKLY OVERTIME RATE)	HOURL	80	80
XP000005	JOURNEYMAN ELECTRICIAN (SUNDAY AND HOLIDAY OVERTIME RATE)	HOURL	40	40
XP000006	APPRENTICE ELECTRICIAN (WEEKLY OVERTIME RATE)	HOURL	20	20
XP000008	APRRENTICE ELECTRICIAN (SUNDAY AND HOLIDAY OVERTIME RATE)	HOURL	10	10
XP000009	PICK-UP TRUCK	HOURL	1700	1700
XP000010	BUCKET TRUCK (LENGTH LESS THAN 35 FEET)	HOURL	300	300
XP000011	BUCKET TRUCK (LENGTH 35 TO 65 FEET)	HOURL	200	200
XP000013	ATTENUATOR, CRASH (TRUCK MOUNTED)	HOURL	350	350
XP000212	CLOSED CIRCUIT TELEVISION DOME CAMERA, HD	EACH	2	2

REV - MS

	USER NAME = daniel.hopkins	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR.	DIST 8 ITS 2026-1	VARIOUS	3	3
		CHECKED -	REVISED -					CONTRACT NO. 76R61				
	PLOT DATE = 2/10/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		