
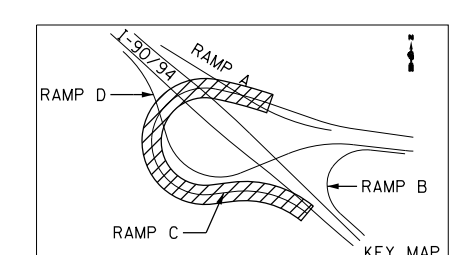


- △12 STA. 10+32.2', 21.0' RT (RAMP D)
MH TA 4 DIA TIF&G CL
RIM 577.11
EX. N INV 574.41+/- (CONTRACTOR TO FIELD VERIFY)
S INV 574.49
- △13 STA. 10+45.56, 33.06' RT (RAMP D)
INLET TA T8G
RIM 577.80
INV 574.57
- △14 STA. 10+99.88, 27.37' RT (RAMP D)
INLET TA T24F&G
RIM 577.98SE
INV 575.30
- △15 STA. 11+21.07, 27.05' RT (RAMP D)
CB TA 4 DIA T24F&G
RIM 578.23
NW INV 575.10
SW INV 575.10
SE INV 575.03 (APPROX EX INV)
- △16 STA. 11+19.82, 29.44' RT (RAMP D)
INLET TA T8G
RIM 578.50
NE INV 575.13
- △17 STA. 113+44.35, 31.00' LT (RAMP C)
TYPE D INLET BOX, STANDARD 609006
RIM 599.89
- △17A STA. 113+42.73, 75.82' LT (RAMP C)
CB TA 4 DIA TIF&G CL
RIM 584.70
W INV 580.00
NE INV 576.00 (APPROX FOR EX 12')
- △18 STA. 115+73.60, 8.00' RT (RAMP C)
CB TA 4 DIA T24F&G
RIM 596.03
INV 592.41
- △18A STA. 116+00, 31.00' LT (RAMP C)
PRC FLAR END SEC 12
INV=591.98
- △19 STA. 117+47, 32.30' LT (RAMP C)
CB TA 5 DIA T8G
RIM 588.22
N. INV (EX 15'') 577.42
S. INV 583.31
E. INV 578.33
- △19A STA. 117+70, 18.50' RT (RAMP C)
INLET TA T8G
RIM 588.73
INV 583.88
- △20 STA. 118+50, 34.50' LT (RAMP C)
CB TA 4 DIA T8G
RIM 585.58
S.E. INV 579.02
W. INV 579.02
- △20A STA. 119+50, 20.00' RT (RAMP C)
CB TA 4 DIA T8G
RIM 584.01
N.W. INV 580.25

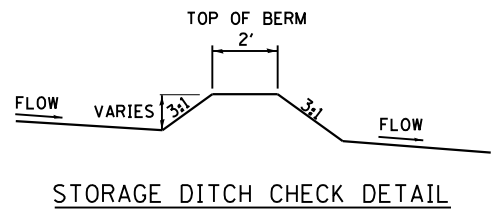

FILE NAME = I:\7000 - 194 at Ohio Street\CADD\CADD_SHEET\SD1606\63-DRN2.dgn

COLLINS ENGINEERS

USER NAME = r9e11
PLOT SCALE = 100.000000' / in.
PLOT DATE = 3/25/2013

DESIGNED -
DRAWN -
CHECKED -
DATE -

REVISED -
REVISED -
REVISED -
REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**RAMP C
EXISTING AND PROPOSED DRAINAGE PLAN**

SCALE: SHEET NO. 2 OF 5 SHEETS STA. TO STA.

F.A.I. RTE. 90/94	SECTION 0303-474HB-R	COUNTY COOK	TOTAL SHEETS 368	SHEET NO. 126
CONTRACT NO. 60F63				

FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT