


- △ 21 STA 123+97.54, 22' LT
INLET TA T24F&G
RIM 574.25
INV 569.60
- △ 22 STA 123+97.54, 24.92' LT
CB TA 4 DIA T10F&G
RIM 574.27
S.W. INV 569.55
N.E. INV 569.47
- △ 23 STA 124+05.39, 42' LT
CB TA 4 DIA T8G
RIM 573.39
S.W. INV 569.35
S.E. INV 569.27
- △ 24 STA 124+50, 19' RT
CB TA 4D M INL 604101
RIM 571.40
E. INV 568.80
- △ 25 STA 124+60, 19' RT
CB TA 4D M INL 604101
RIM 571.45
N.W. INV 568.70
N.E. INV 568.62
- △ 26 STA 124+89.98, 24' LT
CB TA 5 DIA T24F&G
RIM 574.28
N.E. INV 568.03 (EX)
N.W. INV 567.28
S.W. INV 568.11

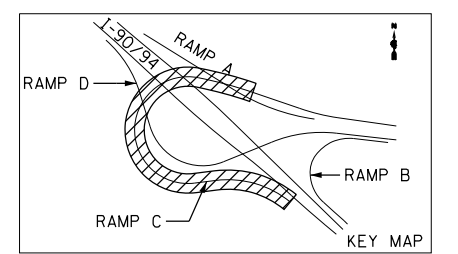

FILE NAME = I:\7000 - 194 at Ohio Street\CADD\CADD_SHEET\SD160663-DRN3.dgn

COLLINS ENGINEERS

USER NAME = r9e11
 PLOT SCALE = 100.000000' / in.
 PLOT DATE = 3/25/2013

DESIGNED -	REVISED -
DRAWN -	REVISED -
CHECKED -	REVISED -
DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**RAMP C
EXISTING AND PROPOSED DRAINAGE PLAN**

SCALE: SHEET NO. 3 OF 5 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94	0303-474HB-R	COOK	368	127
CONTRACT NO. 60F63				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				