


PROPOSED TYPICAL SECTION  
STA 8959+48 TO STA 8967+53

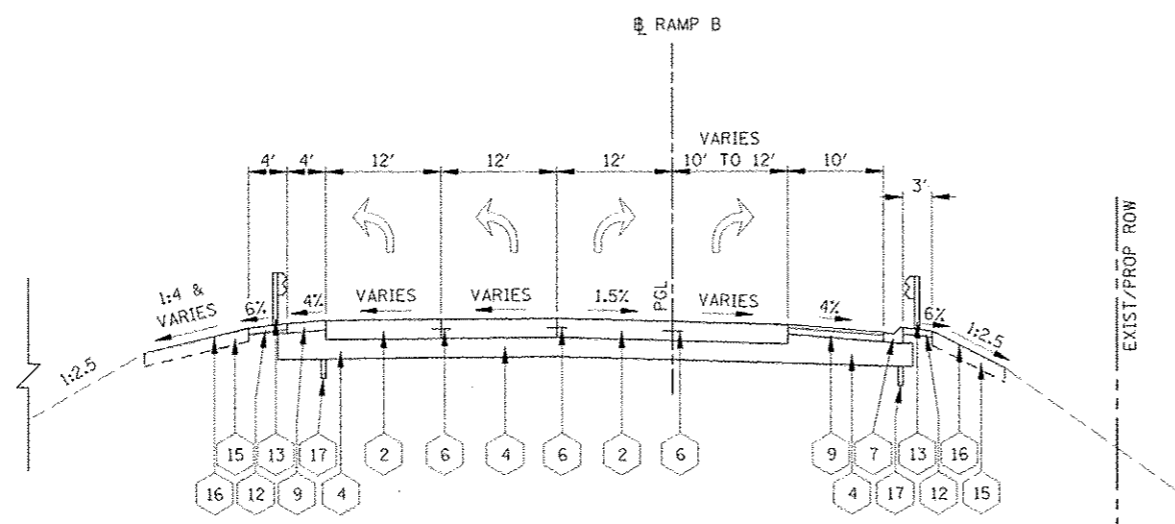

PROPOSED TYPICAL SECTION  
STA 8996+64 TO STA 8997+31

ILLINOIS TOLLWAY LEGEND PROPOSED

- 1 PORTLAND CEMENT CONCRETE PAVEMENT 10" (JOINTED)
- 2 PORTLAND CEMENT CONCRETE PAVEMENT 12" (JOINTED)
- 3 CONTINUOUSLY REINFORCED P.C.C. PAVEMENT 12"
- 4 SUBGRADE AGGREGATE, 12"
- 5 SUBGRADE AGGREGATE SPECIAL, 6"
- 6 DRILLED AND GROUTED IN PLACE, TIE BARS 3/4" X 24" AT 24" CTS. (INCLUDED IN COST OF PAVEMENT)
- 7 GUTTER, TYPE G-2
- 8 GUTTER, TYPE G-2 MODIFIED
- 9 HOT-MIX ASPHALT SHOULDERS, 6"
- 10 STABILIZED SUBBASE HOT-MIX ASPHALT, 4"
- 11 AGGREGATE SHOULDERS, TYPE B
- 12 AGGREGATE SHOULDERS SPECIAL, TYPE C
- 13 GALVANIZED STEEL PLATE BEAM GUARDRAIL, 6' POSTS
- 14 SOLDIER PILE RETAINING WALL WITH 42" CONCRETE BARRIER
- 15 TOPSOIL EXCAVATION AND PLACEMENT, 8"
- 16 SEEDING
- 17 PIPE UNDERDRAINS, FABRIC LINED TRENCH 6"
- 18 SLOPE WALL (SEE BRIDGE DRAWINGS)
- 19 PORTLAND CEMENT CONCRETE SHOULDER 8"
- 20 RIGHT OF WAY FENCE, 6'

NOTES

1. SEE CROSS SECTIONS FOR GRADING INFORMATION.
2. SEE LANDSCAPING PLANS FOR SEEDING AND SODDING INFORMATION.
3. SEE PLANS FOR PLACEMENT OF GUARDRAIL
4. SEE UNDERDRAIN PLANS FOR PLACEMENT OF UNDERDRAINS
5. MATCH EXISTING LANE WIDTH DIMENSION IN FIELD
6. SEE PLAN AND PROFILE FOR MORE INFORMATION OF THE GUARDRAIL ALONG RAMP B, STA 8965+47 TO 8998+67.

FILE NAME >	USER NAME > #USER#	DESIGNED PJO	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TYPICAL SECTIONS I-88 RAMP B</b>	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
#FILE#		DRAWN KES	REVISED -			338	(112 & 113) WRS-5	DUPAGE	963	60	
		CHECKED JCH	REVISED -			CONTRACT NO. 60131					
		DATE 10/15/2012	REVISED -			ILLINOIS FED. AID PROJECT					
				SCALE:	SHEET NO. 14 OF 17 SHEETS	STA.	TO STA.				