





STAGE 3A TEMPORARY TRAFFIC SIGNALS


SEE SHEET TS-10 FOR STAGE 3A TEMPORARY CABLE PLAN

RESTORATION OF WORK AREA. RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.


THE TRAFFIC SIGNAL CONTROLLER EQUIPMENT SHALL BE "ECONOLITE" TO MATCH THE EXISTING ADJACENT SYSTEM.

LEGEND

-  CONSTRUCTION WORK ZONE
-  TEMPORARY PAVEMENT PLACED IN THIS STAGE
-  DIRECTION OF TRAFFIC
-  VIDEO DETECTION ZONE

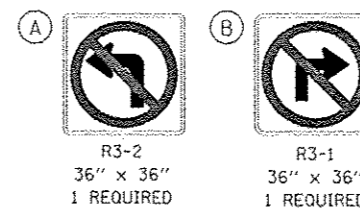

INCIDENTAL TO TEMPORARY TRAFFIC SIGNAL INSTALLATION



FILE NAME	USER NAME	DESIGNED	REVISED
FILE #	#USER#	MJM	
		DRAWN	REVISED
		KES	
		CHECKED	REVISED
		JCM	
		DATE	REVISED
		10/15/2012	

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TEMPORARY TRAFFIC SIGNAL INSTALLATION
MOT STAGE 3A
IL ROUTE 59 AND I-88 NORTH RAMPS**

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
338	(112 & 113) WRS-5	DUPAGE	963	426
TS-11				
CONTRACT NO. 60131				
ILLINOIS FED. AID PROJECT				

SCALE: AS SHOWN SHEET NO. 11 OF 53 SHEETS STA. TO STA.