


**EROSION CONTROL LEGEND**

- |  |  |  |   |
|--|--|--|---|
|  | TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY EROSION CONTROL BLANKET              |  | TEMPORARY DITCH CHECK                               |
|  | PERMANENT SEEDING (SEE NOTE 3)   |  | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE   |
|  | TEMPORARY EROSION CONTROL SEEDING OR PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE |  | INLET & PIPE PROTECTION                             |
|  | TEMPORARY PAVEMENT   |  | INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE |
|  | PERIMETER EROSION BARRIER (SEE NOTE 2)   |  | FLOW DIRECTION (SEE NOTE 4)                         |
|  | PERIMETER EROSION BARRIER INSTALLED IN PREVIOUS STAGE                                |  | PROPOSED STORM SEWER (SEE NOTE 1)                   |
|  | INLET FILTER   |  | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE    |
|  | INLET FILTER INSTALLED IN PREVIOUS STAGE   |  | TEMPORARY PIPE CULVERT                              |
|  | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 1)                                     |  |   |

**NOTES**

- SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION
- PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- SEE STAGE 1 CROSS SECTIONS FOR GRADING INFORMATION.

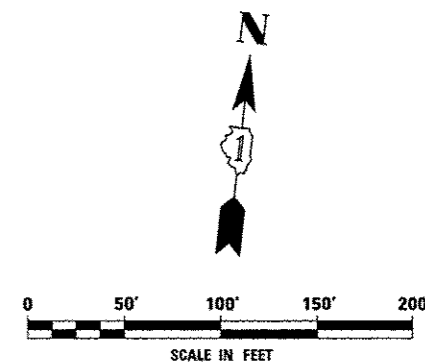

FILE NAME RFBLE4	USER NAME RUGER4	DESIGNED PJO	REVISIONS -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>EROSION CONTROL - STAGE 1, 1A, AND 1B RAMP B</b>	F.A.P. RTE. 338	SECTION (112 & 113) WRS-S	COUNTY DUPAGE	TOTAL SHEETS 963	SHEET NO. 497	
	CHECKED JCM	REVISIONS -	CONTRACT NO. 60131								
	DATE 10/15/2012	REVISIONS -	ILLINOIS FED. AID PROJECT								
		REVISIONS -				SCALE:	SHEET NO. 22 OF 66 SHEETS	STA. 8982+00 TO STA. 8995+50			