


**EROSION CONTROL LEGEND**

- |  |                                                                                      |  |                                                     |
|--|--------------------------------------------------------------------------------------|--|-----------------------------------------------------|
|  | TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY EROSION CONTROL BLANKET              |  | TEMPORARY DITCH CHECK                               |
|  | PERMANENT SEEDING (SEE NOTE 3)                                                       |  | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE   |
|  | TEMPORARY EROSION CONTROL SEEDING OR PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE |  | INLET & PIPE PROTECTION                             |
|  | TEMPORARY PAVEMENT                                                                   |  | INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE |
|  | PERIMETER EROSION BARRIER (SEE NOTE 2)                                               |  | FLOW DIRECTION (SEE NOTE 4)                         |
|  | PERIMETER EROSION BARRIER INSTALLED IN PREVIOUS STAGE                                |  | PROPOSED STORM SEWER (SEE NOTE 1)                   |
|  | INLET FILTER                                                                         |  | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE    |
|  | INLET FILTER INSTALLED IN PREVIOUS STAGE                                             |  | TEMPORARY PIPE CULVERT                              |
|  | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 1)                                     |  |                                                     |

**NOTES**

- SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION
- PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- SEE STAGE 3 CROSS SECTIONS FOR GRADING INFORMATION.

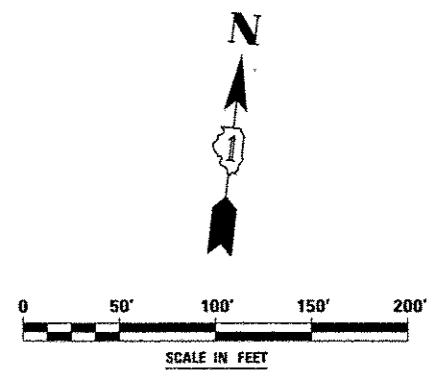

FILE NAME: #FILE#	USER NAME: #USER#	DESIGNED: PJO	REVISED: -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>EROSION CONTROL - STAGE 3, 3A, 3B, AND 3C RAMP A</b>	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN: KES	REVISED: -			338	(112 & 113) WRS-5	DUPAGE	963	520	
		CHECKED: JCM	REVISED: -			CONTRACT NO. 60131					
		DATE: 10/15/2012	REVISED: -			ILLINOIS FED. AID PROJECT					
					SCALE:	SHEET NO. 45 OF 66 SHEETS		STA. 1005+00 TO STA. 1019+00			