


LANDSCAPE DETAIL AT  
RETAINING WALLS 022-W064 & 022-W066

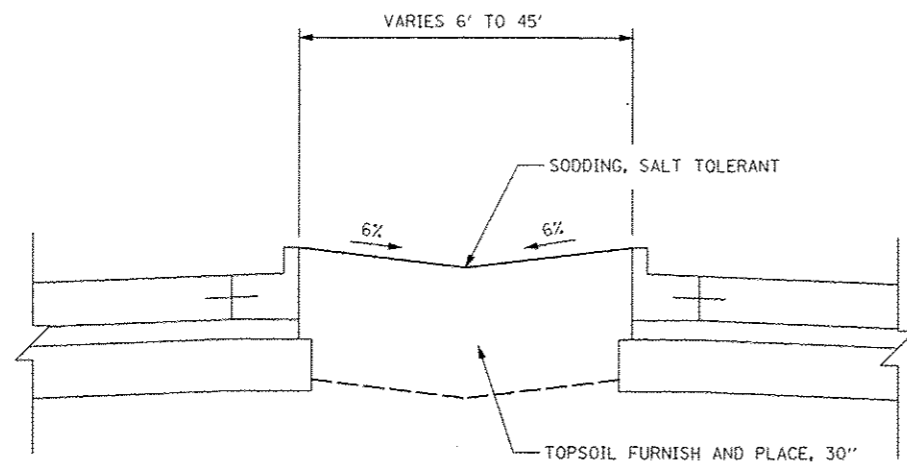

TYPICAL LANDSCAPED MEDIAN DETAIL

**GENERAL LANDSCAPING NOTES:**

1. WEED CONTROL, PRE-EMERGENT GRANULAR HERBICIDE SHALL BE USED FOR ALL NEWLY INSTALLED PLANT MATERIAL, INCLUDING: TREES, SHRUBS, AND VINES.
2. THE USE OF PHOSPHOROUS FERTILIZER NUTRIENTS SHALL BE OMITTED AS SPECIFIED IN SECTIONS 250 AND 252 OF THE STANDARD SPECIFICATIONS FOR SEEDING, CLASS 2A AND SODDING, SALT TOLERANT AREAS.
3. THE ENGINEER WILL CONTACT FABIOLA QUIROZ OF THE ROADSIDE DEVELOPMENT UNIT AT (847) 705-4596, AT LEAST 7 DAYS PRIOR TO PLANTING FOR LAYOUT APPROVAL OF THE SEEDING, SODDING, TREES, SHRUBS, AND VINES.
4. ALL EXISTING DRIVEWAY AND/OR ROADWAY PAVEMENT THAT IS TO BE REMOVED AND REPLACED WITH LANDSCAPING SHALL BE EXCAVATED TO ALLOW FOR THE PLACEMENT OF 30" OF TOPSOIL. THIS WORK SHALL BE PAID FOR AS TOPSOIL EXCAVATION AND PLACEMENT. ANY ADDITIONAL EXCAVATION REQUIRED FOR THE PLACEMENT OF THE 30" OF TOPSOIL SHALL BE CONSIDERED INCLUDED IN THE CONTRACT UNIT PRICE FOR TOPSOIL EXCAVATION AND PLACEMENT.
5. THE COST OF FURNISHING AND PLACING THE MULCH ALONG THE RETAINING WALL IS INCIDENTAL TO THE PLANTINGS BEING INSTALLED.
6. TOPSOIL SHALL BE PAID FOR AS TOPSOIL EXCAVATION AND PLACEMENT.

FILE NAME : #F01014	USER NAME : #USER#	DESIGNED <i>PJO</i>	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>LANDSCAPE GENERAL NOTES AND DETAILS</b>				F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE : #SCALE#	DRAWN <i>KES</i>	REVISED -		338	(112 & 113) WRS-5	DUPAGE	963	543				
	PLOT DATE : #DATE#	CHECKED <i>JCM</i>	REVISED -		CONTRACT NO. 60131								
		DATE <i>10/15/2012</i>	REVISED -		ILLINOIS FED. AID PROJECT								
					SCALE:	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.					