



BILL OF MATERIAL				
Bar	No.	Size	Length	Shape
a(E)	40	#5	23'-4"	—
b(E)	96	#5	2'-7"	└
d(E)	12	#4	4'-11"	J
d1(E)	12	#5	3'-11"	J
Concrete Removal		Cu. Yd.	5.9	
Concrete Superstructure		Cu. Yd.	7.1	
Bridge Deck Grooving		Sq. Yd.	18	
Protective Coat		Sq. Yd.	20	
Reinforcement Bars,		Pound	1,320	
Epoxy Coated				
Bar Splicers		Each	20	

Reinforcement bars designated (E) shall be epoxy coated.

- NOTES:**
- For General Notes and Total Bill of Material, see Sheet S02.
 - For preformed joint strip seal details, see Sheet S13.
 - For bar splicer details, see Sheet S26.
 - Existing reinforcement bars extending into the removal area shall be cleaned, straightened and incorporated into the new construction. Any reinforcement bars that are damaged during concrete removal shall be replaced with an approved bar splicer or anchorage system. Cost included with Concrete Removal.

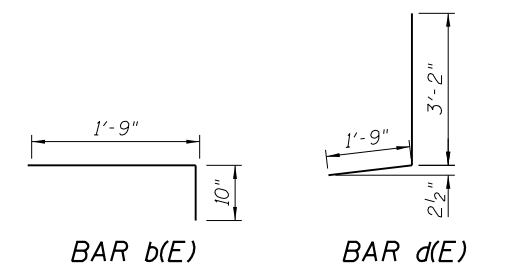

LEGEND	
	Concrete Removal
	Scarification

HBM
ENGINEERING GROUP, LLC
CONSULTING & DESIGN
INSPECTION & RATING
RESEARCH & TESTING

4415 WEST HARRISON ST.
SUITE 231
HILLSIDE, IL 60162
PHONE: (708) 236-0900
FAX: (708) 236-0901

DESIGNED - LAK
CHECKED - MI
DRAWN - LAK
CHECKED - MAI, MI

DATE - 03/13/2013

REVISIONS

REVISIONS	REVISIONS
REVISIONS	REVISIONS
REVISIONS	REVISIONS
REVISIONS	REVISIONS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 9 JOINT REMOVAL AND REPLACEMENT
EB US ROUTE 20 OVER PECATONICA RIVER STRUCTURE NO. 089-0042

SHEET NO. S12 OF S26 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0301	(177-4B-11M)	STEPHENSON	43	29
CONTRACT NO. 64J24			ILLINOIS FED. AID PROJECT	