



PLAN  
EAST SLOPE WALL REPAIRS

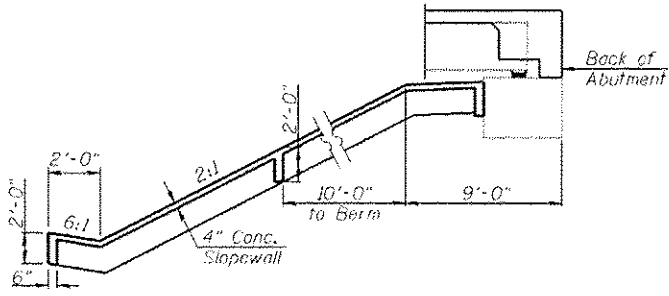


SECTION THRU  
SLOPEWALL



SECTION A-A

LEGEND



BILL OF MATERIAL

ITEM	UNIT	TOTAL
Slope Wall Repair	50 YD	109

Notes:  
Slope wall shall be reinforced with welded wire fabric, 6 in. x 6 in., W4.0 x W4.0, weighting 58 lbs. per 100 sq. ft.  
Do not pour slope wall at abutments until new wingwalls are constructed.

REV. SHEET 6-3-13

**CEC** Cummins Engineering Corporation  
Civil and Structural Engineering

JOB	• 2276.3
FILE	• 0540057_0058-20-29-SN0057SlopeWall.dgn
DATE	• 5/14/2013

DESIGNED	- AAN	REVISED	-
CHECKED	- MDC	REVISED	-
DRAWN	- SJS	REVISED	-
CHECKED	- MDC	REVISED	-

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

EAST SLOPE WALL REPAIRS  
STRUCTURE NO. 054-0057 (NB) & 054-0058 (SB)

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	D6 LOGAN CO BR 2011-1	LOGAN	429	228
CONTRACT NO. 72E11				