


SECTION A-A

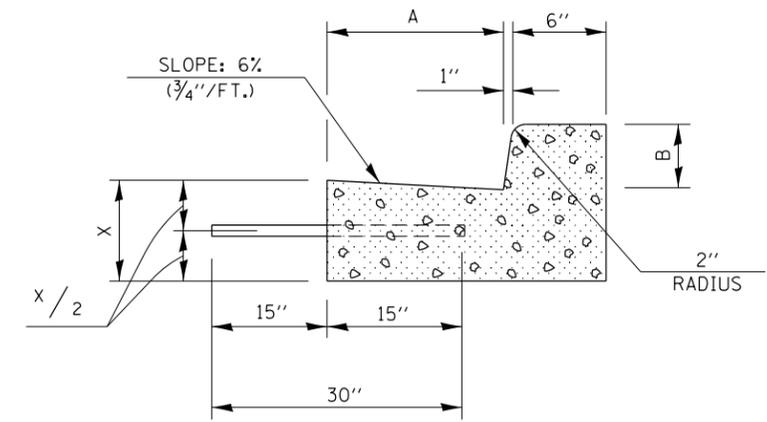

SECTION B-B

GENERAL NOTES

1. CLASS SI CONCRETE SHALL BE USED THROUGHOUT.
2. TIE BARS SHALL BE NO. 6 AT 24" CENTERS UNLESS OTHERWISE SHOWN. OUTLETS SHALL BE TIED TO THE PAVEMENT IN ACCORDANCE WITH DETAILS FOR LONGITUDINAL CONSTRUCTION JOINT SHOWN ON STANDARD 420001.
3. WHEN SPECIAL OUTLET IS CONSTRUCTED ADJACENT TO FLEXIBLE PAVEMENT, THE TIE BARS SHALL BE OMITTED AND ALL CONSTRUCTION JOINTS SHALL BE PROVIDED WITH A DOWEL BAR CONFORMING TO ARTICLE 1006.11(b).
4. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER CU. YD. FOR CLASS SI CONCRETE (OUTLET), SPECIAL. TIE BARS WILL BE PAID FOR SEPARATELY ACCORDING TO ARTICLE 508.07.

	B-6.I2		B-9.I2		B-6.I8		B-9.I8		B-6.24		B-9.24	
A	12"	12"	12"	12"	18"	18"	18"	18"	24"	24"	24"	24"
B	6"	6"	9"	9"	6"	6"	9"	9"	6"	6"	9"	9"
X	9"	10"	9"	10"	9"	10"	9"	10"	9"	10"	9"	10"
CU. YD. CLASS SI CONCRETE (OUTLET)	0.37	0.42	0.38	0.42	0.44	0.49	0.45	0.50	0.51	0.56	0.52	0.57

NOT TO SCALE

DISTRICT 7 DETAIL NO. X6060097

FILE NAME =	USER NAME = steffenmk	DESIGNED -	REVISED - DRM 4-11	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	CLASS SI CONCRETE (OUTLET), SPECIAL			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ci:\pw\work\p\idot\steffenmk\d030911\d774567-shd-details.dgn	DRAWN -	REVISED -	116					126N	EDWARDS	71	41	
PLOT SCALE = 100.0000' / 1in.	CHECKED -	REVISED -	CONTRACT NO. 74567									
PLOT DATE = 3/18/2013	DATE -	REVISED -	ILLINOIS FED. AID PROJECT									
				SCALE: N/A	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.					