



SECTION

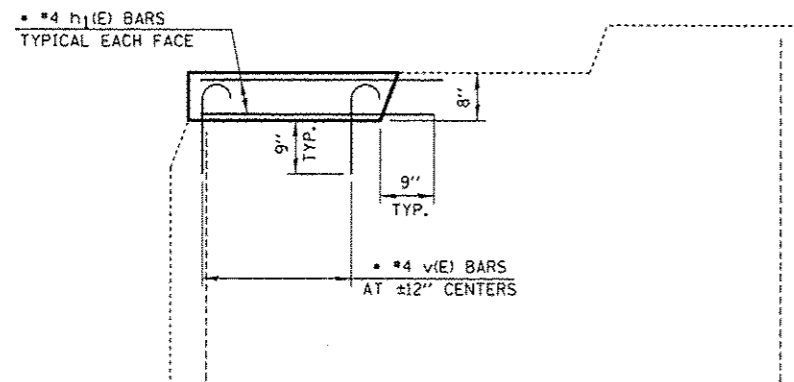

PROPOSED ELEVATION

• EPOXY GROUT h(E) & v(E) BARS IN 9" MINIMUM HOLES ACCORDING TO ARTICLE 584 OF THE STANDARD SPECIFICATIONS.



BAR v(E)

NOTES

REINFORCEMENT BARS DESIGNATED (E) SHALL BE EPOXY COATED.

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING PLANS ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. THE CONTRACTOR SHALL FIELD VERIFY EXISTING DIMENSIONS AND DETAILS AFFECTING NEW CONSTRUCTION AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN SCOPE OF THE WORK, HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT PRICE BID FOR THE WORK.

BILL OF MATERIAL

BAR	NO.	SIZE	LENGTH	SHAPE
h ₁ (E)	4	#4	4'-3"	—
v(E)	4	#4	1'-9"	U
CONCRETE STRUCTURES			CU YD	0.1
REINFORCEMENT BARS, EPOXY COATED			POUND	16.1

FILE NAME	USER NAME : herbaughrd	DESIGNED -	REVISED -
c:\p\work\p\idat\herbaughrd\08308620\076F97-sht-cover.dgn		DRAWN -	REVISED -
MODEL NAME	PLOT SCALE = 100.0000 / in.	CHECKED -	REVISED -
	PLOT DATE = 5/1/2013	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MISCELLANEOUS DETAILS

SCALE: NONE SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60-(1,2,3,4,5,6)J-1	MADISON	33	33
				CONTRACT NO. 76F97
ILLINOIS FED. AID PROJECT				