
NOTES:

SEE TABLE "DETECTOR LOOP REQUIREMENTS AND CALCULATIONS" FOR LOOP SIZE AND CALCULATED NUMBER OF TURNS. SEE "DETAIL A" FOR INSTALLING DETECTOR LOOP WIRES IN EXISTING CONDUITS.

	SCHEDULE OF QUANTITIES	TOTAL QUANTITIES	IL003 &	IL003 &	IL003 &	
CODE NO	ITEM	UNIT	QUANTILS	NEW POAG	IL 143	POTOON
80300100	LOCATING UNDERGROUND CABLE	FOOT	230	40	130	60
88600690	DETECTOR LOOP REPLACEMENT	FOOT	5027	1315	2488	1223

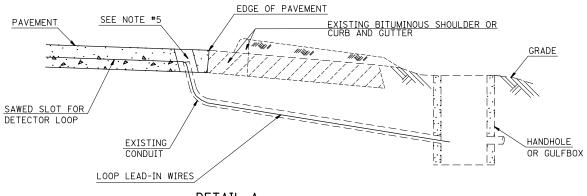

DETAIL A (NO SCALE)

INSTALLING DETECTOR LOOP WIRES IN EXISTING CONDUIT

- DRILL OUT PAVEMENT SEALANT AND CLEAN EXISTING CONDUIT.
 REMOVE EXISTING DETECTOR LOOP WIRES TO HANDHOLE OR GULFBOX.
 INSTALL NEW LOOP LEAD-IN WIRES IN EXISTING CONDUIT.

- 4. SPLICE NEW DETECTOR LOOP WIRES TO EXISTING LOOP LEAD-IN CABLE IN HANDHOLE OR GULFBOX.
- 5. FILL HOLE WITH APPROVED SEALER. PREVENT SEALER FROM ENTERING INTO CONDUIT.
- 6. LOCATING UNDERGROUND CABLE WILL BE PAID FOR SEPARATELY.

NOT A PAY ITEM. THE COST OF THIS WORK SHALL BE INCLUDED IN THE PAY ITEM "DETECTOR LOOP REPLACEMENT"

DETECTOR LOOP REPLACEMENT LEGEND

🖾 EX. HANDHOLE

EX. DETECTOR LOOP EX. TRAFFIC SIGNAL CONTROLLER - --- EXISTING CONDUIT

PROPOSED DETECTOR LOOP

FILE NAME =	USER NAME = elyaskordio	DESIGNED -	REVISED -			DETECTOR LOOP REPLACEMENT PLAN	F.A.P. RTF.	SECTION	COUNTY	TOTAL SHEET
c:\pw_work\pwidot\elyaskordio\dØ316383\d		DRAWN -	REVISED -	STATE OF ILLINOIS		GENERAL NOTES, SCHEDULE OF QUANTITIES,		(101,102)RS-2, 202RS-4	MADISON	69 66
	PLOT SCALE = 100.0000 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	DETAIL AND LEGEND				CONTRACT	T NO. 76GO6
	PLOT DATE = 4/12/2013	DATE -	REVISED -		SCALE:	SHEET NO. OF SHEETS STA. TO STA.	FED. RC	AD DIST. NO. ILLINOIS FED. A	ID PROJECT	