


6.0" Radius, 1.3" Border, White on Green;
 "FREEWAY" E Mod 2K; "ENTRANCE" E Mod 2K;
 Table of letter and object lefts.

F	R	E	E	W	A	Y	
11.9	23.3	35.6	47.0	57.2	70.9	83.9	
E	N	T	R	A	N	C	E
15.1	24.6	34.5	43.7	52.8	64.8	75.3	85.5

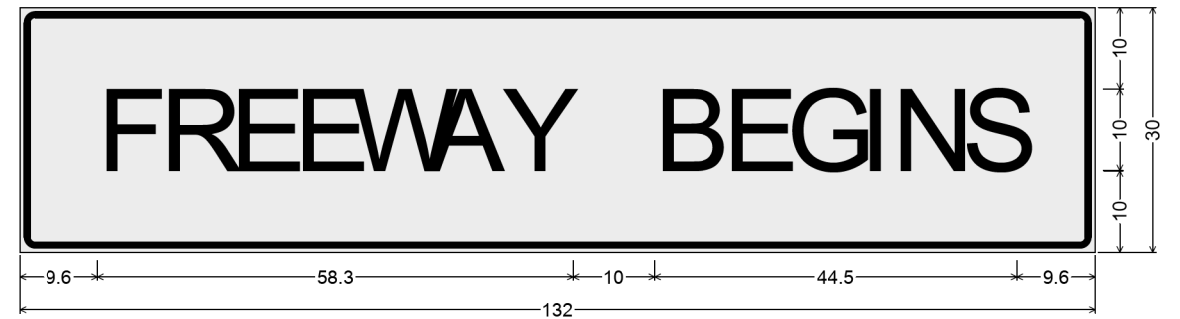

1.9" Radius, 0.8" Border, 0.5" Indent, Black on Yellow;
 "FREEWAY BEGINS" D 2K;
 Table of letter and object lefts.

F	R	E	E	W	A	Y	B	E	G	I	N	S
9.6	17.3	25.8	33.7	40.7	50.2	59.3	77.9	86.4	94.1	103.1	107.1	115.6

FILE NAME =	USER NAME = colemm	DESIGNED -	REVISED -
ct:\pw\work\p\dot\colemm\d0339264\78362-sh-t-p\In.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
MODELNAME	PLOT DATE = 4/3/2013	DATE -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**FREEWAY ENTRANCE/FREEWAY BEGINS
 SIGN PANEL DETAILS**

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	D9 SAFETY SIGNAGE 2013	VARIOUS	34	33
			CONTRACT NO.	78362
ILLINOIS FED. AID PROJECT				

* VARIOUS ROUTES