


GENERAL NOTES

1. THE CONSTRUCTION SHALL BE GOVERNED BY THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION IN ILLINOIS", CURRENT EDITION.
2. ALL REFERENCES TO THE "DEPARTMENT" OR "ENGINEER" IN THE I.D.O.T. STANDARD SPECIFICATIONS SHALL BE CONSTRUED TO MEAN THE OWNER OR HIS AGENT.
3. WHERE SECTION, SUB-SECTION, SUBDIVISION, OR PROPERTY MONUMENTS ARE ENCOUNTERED, THE ENGINEER SHALL BE NOTIFIED BEFORE SUCH MONUMENTS ARE REMOVED. THE CONTRACTOR SHALL PROTECT AND PRESERVE ALL PROPERTY MARKERS UNTIL AN OWNER OR AUTHORIZED SURVEYOR HAS WITNESSED OR REFERENCED THEIR LOCATION.
4. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS PRIOR TO CONSTRUCTION AND NOTIFY THE ENGINEER OF ANY DISCREPANCY IMMEDIATELY.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRS TO ANY UTILITY LINES AND EXISTING IMPROVEMENTS TO REMAIN THAT ARE DAMAGED AS A RESULT OF THE WORK.
6. ALL SECTIONS, DETAILS AND NOTES SHOWN ON THE DRAWINGS ARE INTENDED TO BE TYPICAL AND SHALL APPLY TO SIMILAR SITUATIONS ELSEWHERE, UNLESS OTHERWISE SHOWN.
7. ALL THE ELEVATIONS, STATIONS, AND OFFSETS SHOWN ON THE PLANS SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
8. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS.
9. EXCESS MATERIAL, IF NOT USED FOR OTHER ON-SITE PURPOSES, SHALL BE HAULED OFF-SITE AT CONTRACTOR'S EXPENSE.
10. THE WORK AREA SHALL BE POSITIVELY DRAINED DURING CONSTRUCTION. FINAL GRADES SHALL BE PROTECTED AGAINST DAMAGE FROM EROSION, SEDIMENTATION, AND TRAFFIC.
11. THE OWNER RESERVES THE RIGHT TO REDUCE ANY QUANTITY OR DELETE PAY ITEMS FROM THIS CONTRACT. NO ADDITIONAL COMPENSATION WILL BE ALLOWED.
12. APPLICATION RATES:
NUTRIENTS: 90 LB/ACRE
13. THE CONTRACTOR SHALL USE ANY ON SITE MATERIAL DEEMED SUITABLE BY THE ENGINEER BEFORE ANY NEW FILL IS HAULED TO THE SITE.

14. CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL EXISTING UNDERGROUND UTILITIES PRIOR TO EXCAVATION.
15. CONTRACTORS BIDDING THIS PROJECT SHALL VISIT THE SITE BEFORE BIDDING.
16. A DETOUR ROUTE WILL BE MARKED AND SIGNS WILL BE INSTALLED PER STANDARD 701901-02 AND BLR 22-7 AT INTERSECTIONS NOTED ON THE MAP BELOW.

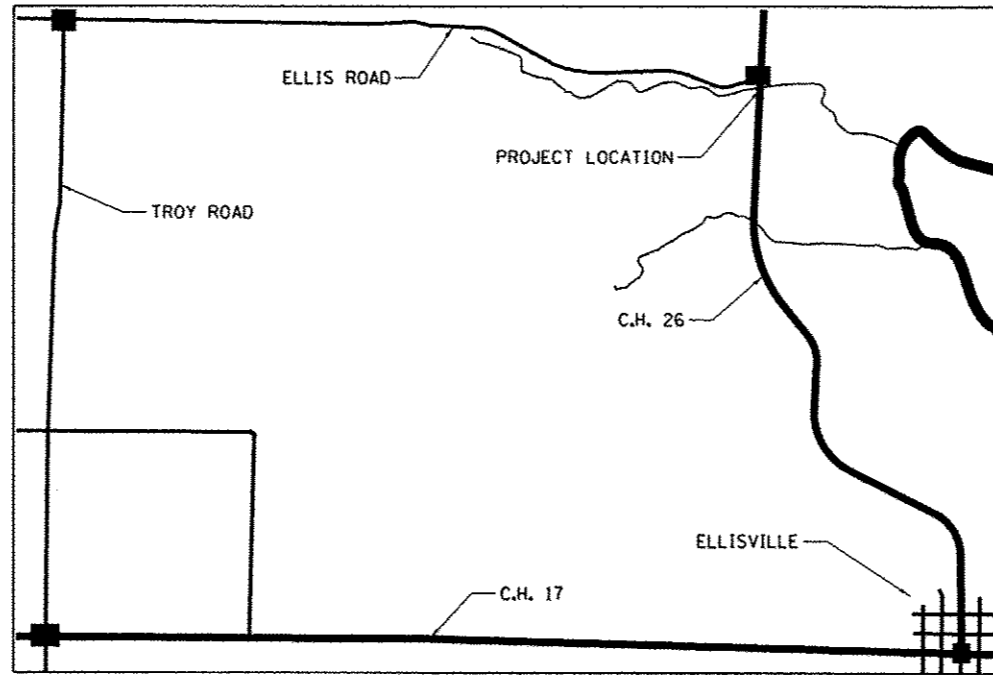

17. THE REMOVAL AND REPLACEMENT OF ANY EXISTING SIGNS AND SIGN POSTS DEEMED TO BE OBSTRUCTIONS TO CONSTRUCTION ACTIVITIES OR LISTED IN THE SCHEDULE OF QUANTITIES SHALL BE INCLUDED IN THE COST OF REMOVE EXISTING STRUCTURES.

LEGEND

- ▲ CONTROL POINT
- ⊞ EXISTING TELEPHONE PEDESTAL
- EXISTING GUY
- EXISTING POWER POLE
- ⊥ EXISTING SIGN
- ⊠ EXISTING R.O.W. MARKER
- TELEPHONE
- PIPE CULVERT
- OVERHEAD ELECTRIC
- FENCE
- EXISTING R.O.W.
- EXISTING CROPLINE

UTILITIES

MID CENTURY TELEPHONE CO-OP
285 MID CENTURY LANE
FAIRVIEW, IL 61432
ATTN: JERRY FOX
309-778-8611

UTILITY NOTE

THE LOCATIONS OF THOSE BURIED AND ABOVEGROUND UTILITIES SHOWN ARE APPROXIMATE, ARE SHOWN FOR CONTRACTOR INFORMATIONAL USE ONLY, AND ARE NOT TO BE REFERENCED FOR CONSTRUCTION PURPOSES. THE IMPLIED PRESENCE OR ABSENCE OF UTILITIES IS NOT TO BE CONSTRUED BY THE OWNER, ENGINEER, CONTRACTOR, OR SUBCONTRACTORS TO BE AN ACCURATE AND COMPLETE REPRESENTATION OF UTILITIES THAT MAY OR MAY NOT EXIST ON THE CONSTRUCTION SITE. BURIED AND ABOVEGROUND UTILITY LOCATION, IDENTIFICATION, AND MARKING ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. REROUTING, DISCONNECTION, PROTECTION, ETC. OF ANY UTILITIES MUST BE COORDINATED AMONG THE CONTRACTOR, UTILITY COMPANY, AND OWNER. SITE SAFETY, INCLUDING THE AVOIDANCE OF HAZARDS, ASSOCIATED WITH BURIED AND ABOVEGROUND UTILITIES REMAIN THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

© Copyright Hanson Professional Services Inc. 2013
HANSON
 Hanson Professional Services Inc.

DATE	BY
1/10/13	1/10/13
2/1/13	2/1/13
3/25/13	3/25/13

FILE NAME: c:\passe\work\do_not_delete\dwg40234104	USER NAME: amdr02846	DESIGNED: KNB	REVISED:	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FULTON CO HWY 26 GENERAL NOTES AND LEGEND	F.A. RTE.:	SECTION:	COUNTY:	TOTAL SHEETS:	SHEET NO.:
PLT SCALE: 10,0000 1/16"	CHECKED: CAL	REVISOR:	CH26			11-00143-00-BR	FULTON	23	2	
PLT DATE: 03/27/2013	DATE: 3-26-13	REVISOR:	CONTRACT NO. 89597							
SCALE: N/A	SHEET 2 OF 23 SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT BR05 0057 10321							