

ROUTE NO	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 856 C.H. 1	12-00039 -01-SP	MONROE	4	4

FEDERAL AID PROJECT  
CONTRACT 97519

### MAINLINE SURFACING SUMMARY

LOCATION STATION - STATION	HOT-MIX ASPHALT SURFACE COURSE, MIX "E" N70	HOT-MIX ASPHALT SHOULDERS MIX "C" N50	HOT-MIX ASPHALT SURFACE REMOVAL, 1 1/2"	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)
UNIT	TON	TON	SQ YD	SQ YD	GAL	TON
STA. 14+00 TO STA. 31+75	410	553	4528	--	226	6.8
STA. 83+00 TO STA. 89+00	140	--	--	1467	74	2.2
<b>PROJECT TOTALS</b>	<b>550</b>	<b>553</b>	<b>4528</b>	<b>1467</b>	<b>300</b>	<b>9</b>

### EARTHWORK SCHEDULE

LOCATION STATION - STATION	EARTH EXCAVATION
UNIT	CY
STA. 14+00 TO STA. 31+75	274.4
<b>PROJECT TOTALS</b>	<b>274.4</b>

\* EARTH EXCAVATION IS FOR THE REMOVAL OF THE EXISTING  
AGGREGATE SHOULDER FOR PLACEMENT OF THE HMA SHOULDER.


### PAVEMENT MARKINGS

STATION	PAINT			REFLECTIVE PAVEMENT MARKER		RUMBLE STRIP (FOOT)	
	SKIP-DASH YELLOW 4" (FT)	SOLID YELLOW 4"		AMBER 2-WAY (EACH)	WHITE ONE-WAY (EACH)		
		CENTERLINE	NO PASSING ZONE LT				RT
14+00 TO 32+41.18 BK	0	1841	1841	3682	46.0	92.0	3682
31+64.16 AH TO 31+75	0	11	11	22	1.0	2.0	22
83+00 TO 89+00	0	600	600	1200	0.0	0.0	0.0
<b>SUBTOTALS</b>	<b>0</b>	<b>2,452</b>	<b>2,452</b>	<b>4,904</b>	<b>47</b>	<b>94</b>	<b>3704</b>
<b>TOTALS</b>		<b>9,808</b>			<b>141</b>		<b>3704</b>

### ROADWAY SIGNING SCHEDULE

LOCATION STATION - STATION	CHEVRONS W1-8 18" X 24"
STA. 14+00 TO STA. 25+00 RIGHT	16
STA. 25+00 TO STA. 31+75 LEFT	12
<b>PROJECT TOTALS</b>	<b>28</b>

KASKASKIA ROAD CURVES  
LOCATION MAP AND  
SCHEDULES  
SEC 12-00039-01-SP  
MONROE COUNTY, ILLINOIS

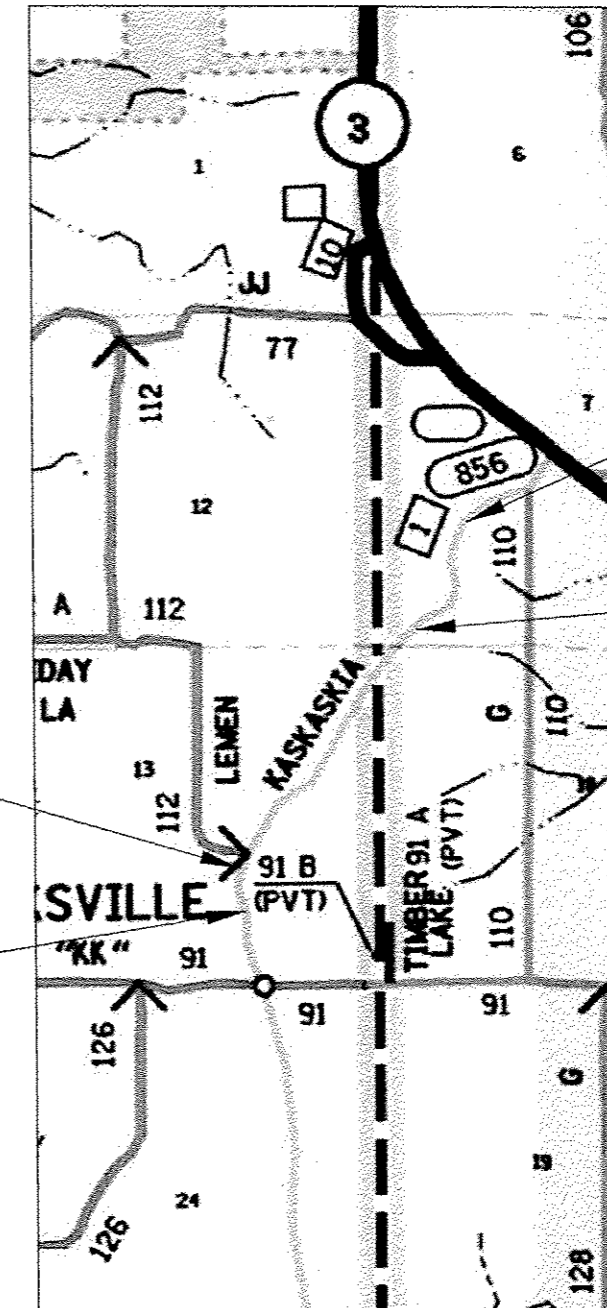

BEGIN CONSTRUCTION  
"S" CURVES  
STA. 14+00

STATION EQUATION  
STA 32+41.18 BK = STA 31+64.16 AH

END CONSTRUCTION  
"S" CURVES  
STA. 31+75

BEGIN CONSTRUCTION  
BURKSVILLE CURVE  
STA. 83+00

END CONSTRUCTION  
BURKSVILLE CURVE  
STA. 89+00