



F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	99 (1&2) WRS	WILL	334	164
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

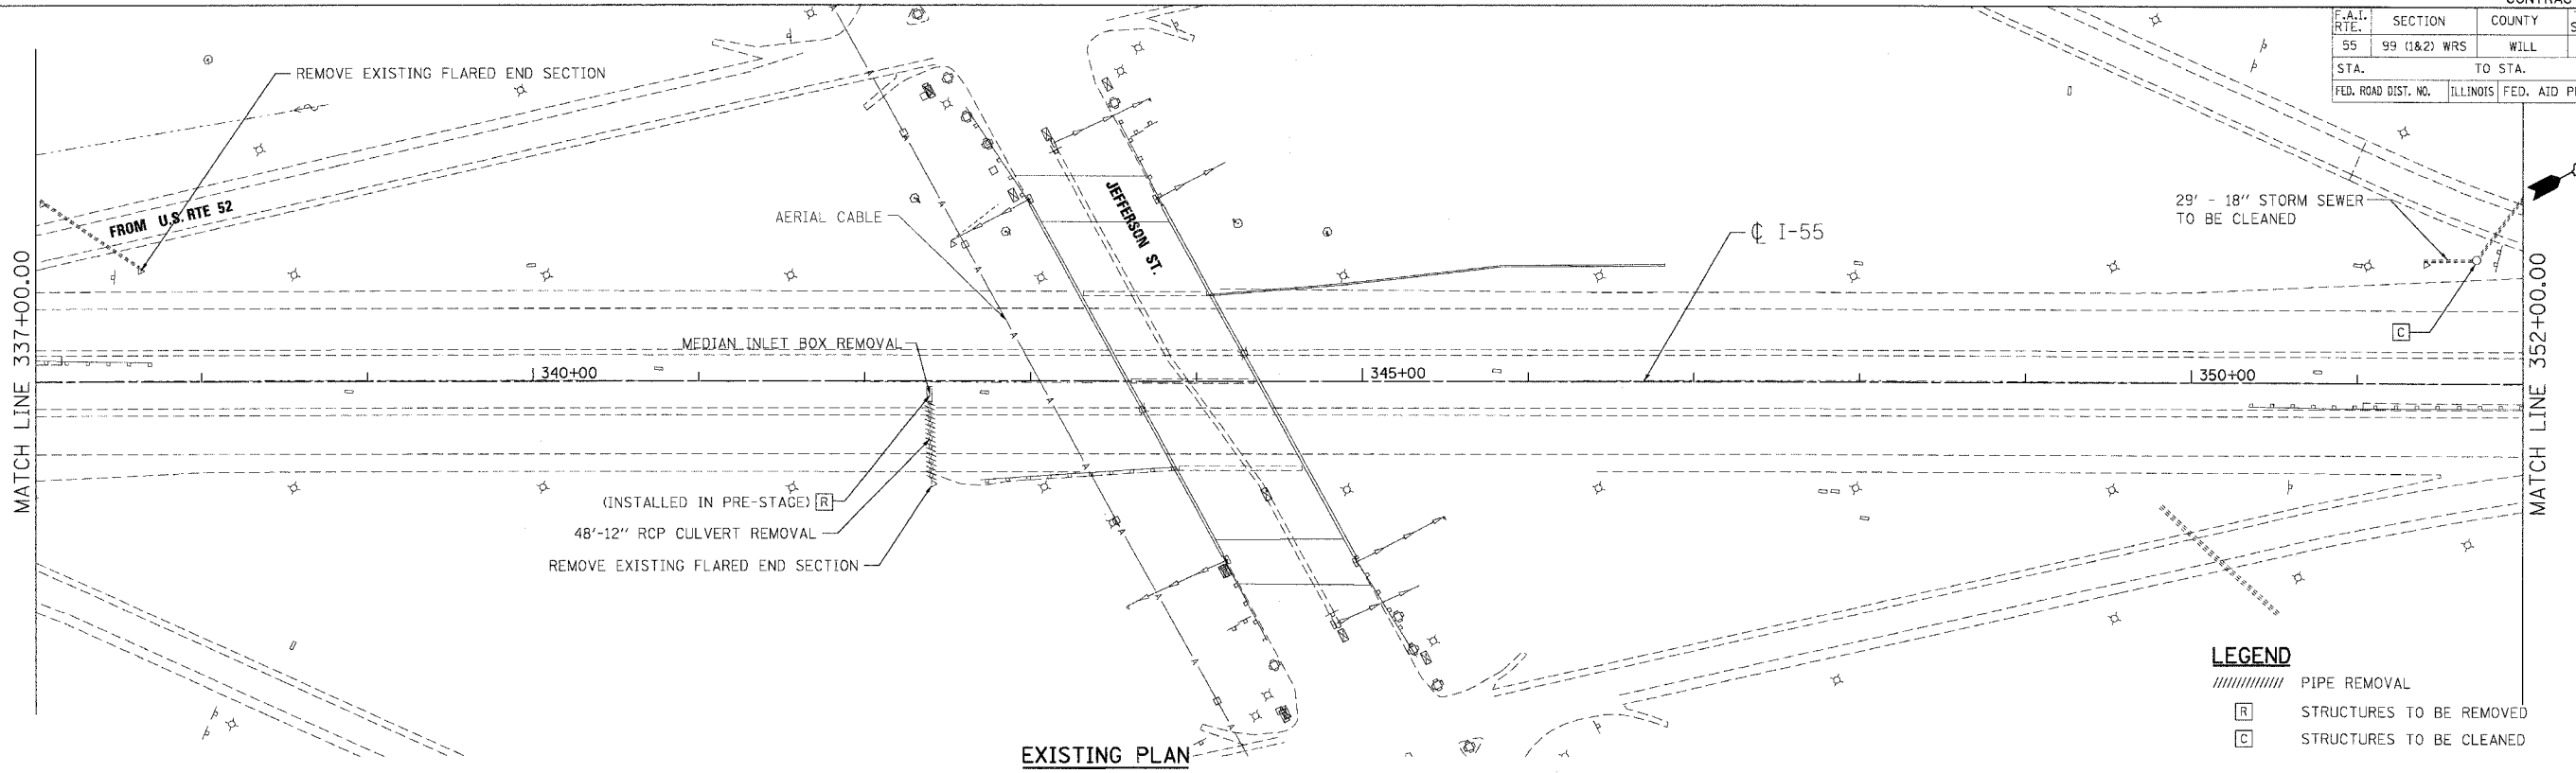

EXISTING PLAN

LEGEND

- ////// PIPE REMOVAL
- [R] STRUCTURES TO BE REMOVED
- [C] STRUCTURES TO BE CLEANED

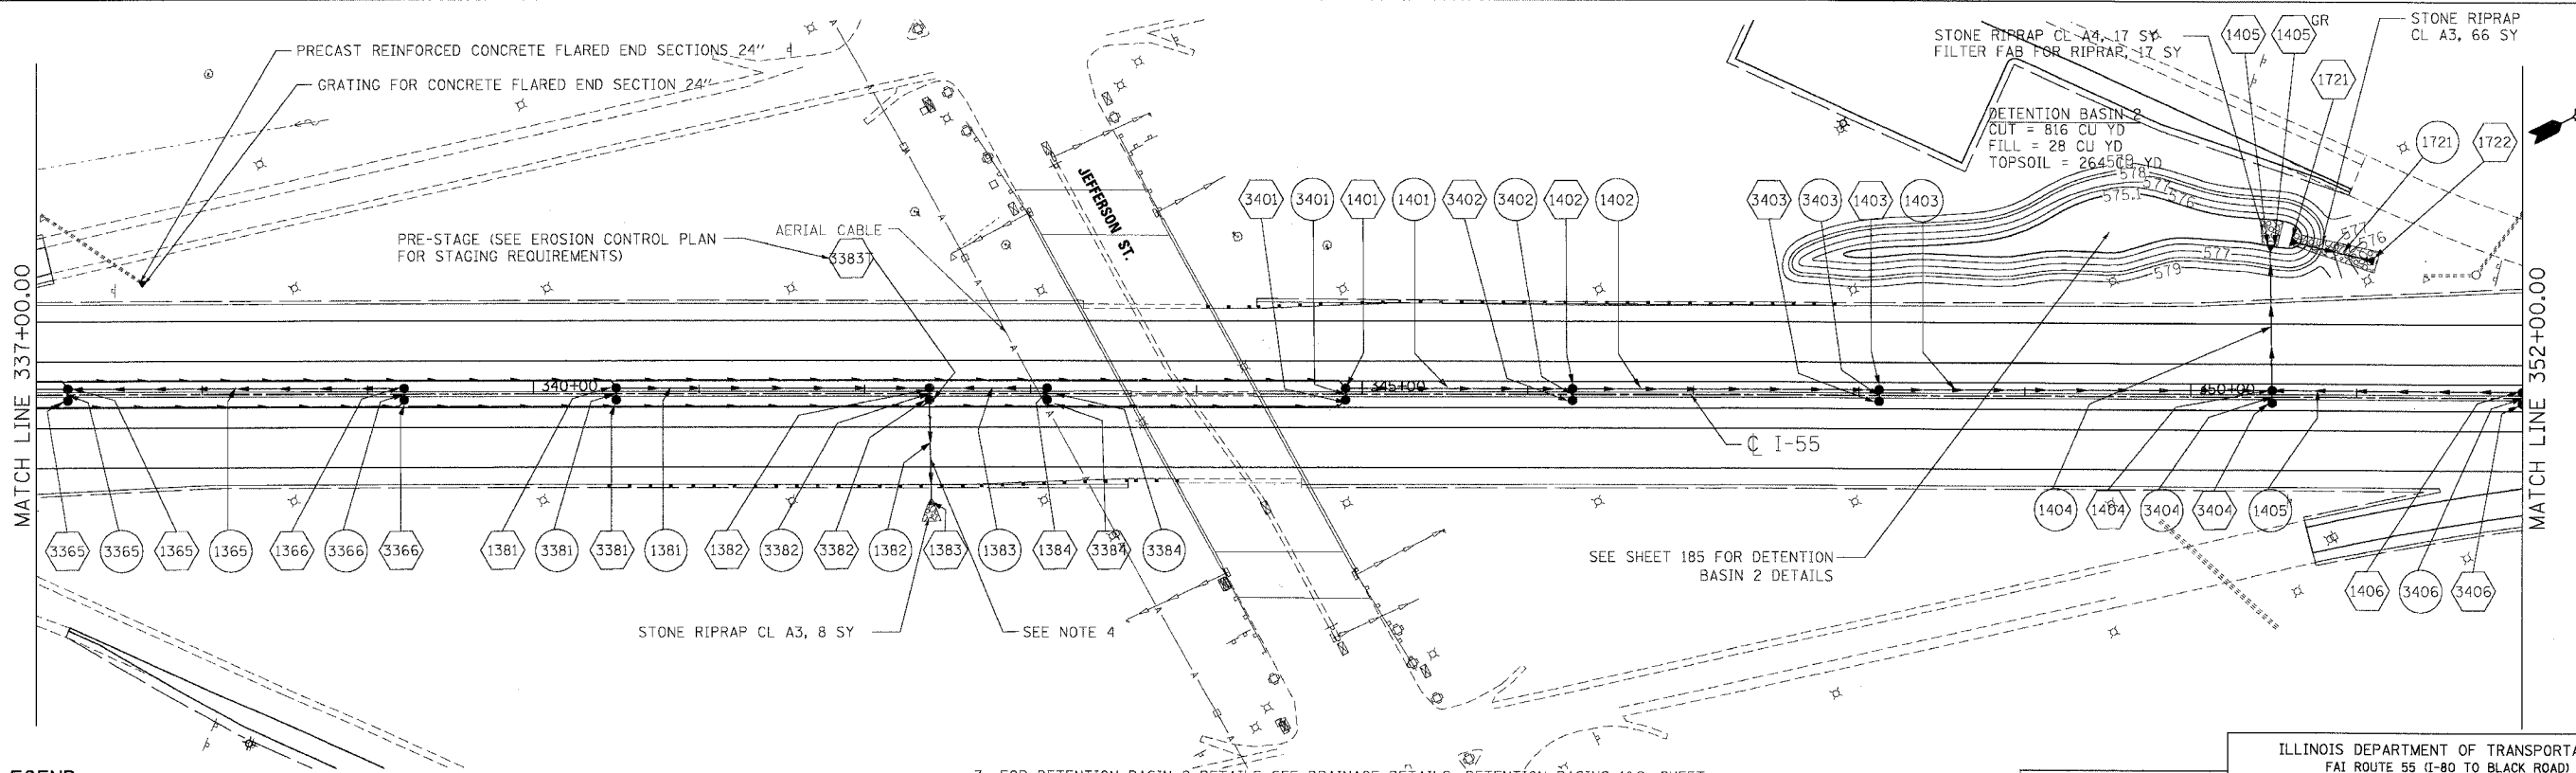

PROPOSED PLAN

LEGEND

- (1001) STRUCTURE NUMBER
- (1001) GR GRATING FOR STRUCTURE
- (1001) PIPE NUMBER
- STORM SEWER
- CATCH BASIN
- MANHOLE
- ▲ FLARED END SECTION
- ⌋ HEADWALL
- PIPE UNDERDRAINS

NOTES

1. FOR STRUCTURE AND PIPE INFORMATION SEE DRAINAGE SCHEDULES, SHEETS 169, 170, 171, 172, 173, 174 AND 175.
2. PROPOSED SEWER AND CULVERT CROSSING BENEATH THE EXISTING PAVEMENT SHALL BE CONSTRUCTED DURING PRE-STAGE PER THE STAGING AND TRAFFIC CONTROL PLANS. SEE ROADWAY PLANS FOR PATCHING DETAILS.

3. FOR DETENTION BASIN 2 DETAILS SEE DRAINAGE DETAILS, DETENTION BASINS 1&2, SHEET 185.
4. STORM SEWER LATERALS SHALL BE INSTALLED PER THE STAGING AND TRAFFIC CONTROL TYPICAL SECTIONS FOR PRE-STAGE (SEE SHEET 111). THE CONTRACTOR SHALL BEGIN CONSTRUCTION OF THIS STORM SEWER LATERAL WHEN PRECIPITATION IS NOT INCLUDED IN THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION'S NATIONAL WEATHER SERVICE FORECAST FOR THE 48 HOUR PERIOD FOLLOWING THE START OF CONSTRUCTION OF THIS STORM SEWER LATERAL ([HTTP://WWW.NWS.NOAA.GOV](http://www.nws.noaa.gov)). PRE-STAGE, PHASE II SHALL BE COMPLETED WITHIN 36 HOURS OF COMPLETING PRE-STAGE, PHASE I FOR THIS STORM SEWER LATERAL.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 FAI ROUTE 55 (I-80 TO BLACK ROAD)
 WIDENING AND RESURFACING

DRAINAGE AND UTILITY PLAN
FAI 55
STA. 337+00.00 TO STA. 352+00.00

SCALE: 1"=50'
 DATE 03/15/07
 DRAWN BY MRK
 CHECKED BY TKL

TENG
 TENG & ASSOCIATES, INC.
 ENGINEERS/ARCHITECTS/PLANNERS
 CHICAGO, ILLINOIS

PLOT DATE = 03/15/07
 FILE NAME = 031507.DWG
 USER = TENG