


NOT PLOTTED TO SCALE

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1354	02-00122-00-RS	LIVINGSTON	6	4

PROJECT NO. SR-1354(104)

MAILBOX TURNOUT DETAIL (PLACED DURING MAINLINE PAVING) (NTS)

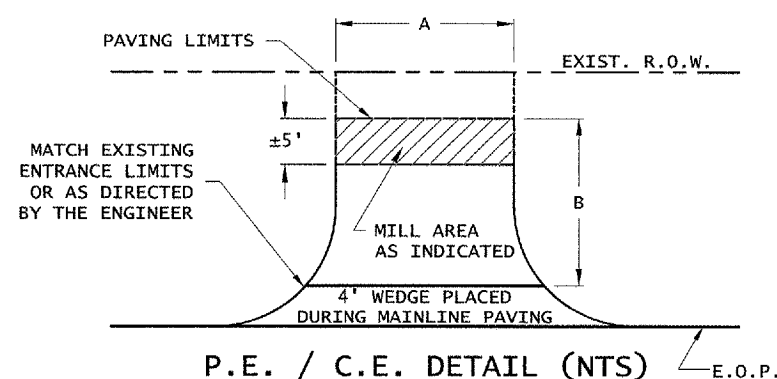

P.E. / C.E. DETAIL (NTS)

FOR QUANTITIES SEE CHART BELOW

LOCATION	WIDTH	LENGTH	AREA
STA. 301+66 TO 302+96 RT	9'	130'	130 SY
STA. 313+03 TO 315+47 LT	8'	244'	217 SY
TOTAL	=		347 SY

CLASS D PATCH SCHEDULE

MISSAL RD. / CH 14 - ENTRANCE QUANTITIES

TYPE	STATION	A(Ft.)	B(Ft.)	AREA (S.Y.)	MILLING (S.Y.)	BIT. MAT. PRIME(MC-30)	BIT. MAT. PRIME(RC-70)	LEVEL BINDER	BINDER COURSE	SURFACE COURSE	INCID. BIT.
CE	40+30(L)	15	15	25		9		1		1	6
PE	42+90(L)	12	17	23	7	9	1	1		1	6
MBTO	76+30(L)	65	4	19		7		3		3	
PE	76+33(R)	10	15	17	6	6	1	1		1	4
PE	77+47(R)	10	15	17	6	6	1	1		1	4
PE	84+47(R)	10	15	17		6		1		1	4
MBTO	84+50(L)	65	4	19		7		3		3	
PE	161+06(L)	10	4	4		2		1		1	1
PE	216+82(L)	11	4	5		2			1	1	2
MBTO	216+85(R)	65	4	19		7			3	3	
PE	235+70(R)	12	15	20		7			1	1	5
PE	266+89(L)	14	15	23		9			1	1	6
MBTO & PE	291+38(L)	65	15	28		10			4	3	7
MBTO & PE	296+66(R)	65	15	28	9	10	1		4	3	7
MBTO & PE	304+00(L)	65	15	28		10			4	3	7
MBTO & PE	311+55(R)	65	15	28		10			4	3	7
MBTO & PE	315+50(R)	65	15	28		10			4	3	7
PE	317+46(R)	12	15	20		7			1	1	5
TOTALS					28	134	4	12	27	34	78