



DITCH SCHEDULE									
LOCATION	STATION TO STATION	OFFSET	LENGTH	WIDTH	EROSION CONTROL BLANKET	STONE RIPRAP CLASS A4	GABIONS	FILTER FABRIC	
					FEET	FEET	SQ YD	SQ YD	CU YD
MAINLINE	150+46.00 - 151+00.00	LT	54	9	-	-	27	54	
MAINLINE	149+50.00 - 150+00.00	RT	50	13	-	-	36	72	
MAINLINE	150+00.00 - 151+42.44	RT	166	9	-	166	-	166	
MAINLINE	151+00.00 - 152+00.00	LT	100	9	100	-	-	-	
MAINLINE	151+87.00 - 157+00.00	RT	513	9	-	513	-	513	
MAINLINE	153+00.00 - 155+00.00	LT	200	9	-	200	-	200	
MAINLINE	155+00.00 - 156+00.00	LT	100	9	-	-	50	100	
MAINLINE	156+00.00 - 156+49.00	LT	49	9	49	-	-	-	
MAINLINE	156+98.00 - 158+00.00	LT	102	9	102	-	-	-	
MAINLINE	162+73.00 - 162+70.00	LT	15	10	-	17	-	17	
MAINLINE	172+50.00 - 173+15.00	LT	65	9	65	-	-	-	
MAINLINE	173+44.00 - 174+31.00	LT	87	9	-	-	44	87	
MAINLINE	174+39.00 - 175+29.00	LT	90	9	-	-	45	90	
MAINLINE	175+40.00 - 176+94.00	LT	154	9	154	-	-	-	
MAINLINE	180+65.00 - 182+05.00	LT	140	9	140	-	-	-	
MAINLINE	198+42.00 - 198+53.00	RT	11	9	-	11	-	11	
MAINLINE	198+53.00 - 199+00.00	RT	47	9	47	-	-	-	
MAINLINE	203+98.00 - 204+04.00	RT	6	9	-	-	3	6	
MAINLINE	215+78.00 - 216+00.00	RT	22	9	22	-	-	-	
MAINLINE	238+00.00 - 239+00.00	RT	101	9	-	-	51	101	
MAINLINE	238+40.00 - 239+00.00	LT	60	9	-	60	-	60	
MAINLINE	268+48.00 - 268+75.00	LT	27	9	-	-	14	27	
MAINLINE	268+48.00 - 268+75.00	RT	27	9	-	-	14	27	
MAINLINE	268+93.00 - 269+02.00	RT	9	9	-	-	5	9	
MAINLINE	268+93.00 - 269+25.00	LT	32	9	-	32	-	32	
MAINLINE	315+00.00 - 316+00.00	LT	100	9	-	100	-	100	
MAINLINE	315+00.00 - 316+00.00	RT	100	9	100	-	-	-	
MAINLINE	329+00.00 - 329+28.00	RT	28	9	-	28	-	28	
MAINLINE	329+17.00 - 330+00.00	LT	83	9	-	83	-	83	
MAINLINE	334+52.00 - 334+89.00	LT	37	9	37	-	-	-	
MAINLINE	334+80.00 - 335+00.00	RT	20	9	-	-	10	20	
MAINLINE	334+89.00 - 335+25.00	LT	36	9	-	-	18	36	
MAINLINE	357+65.00 - 358+00.00	LT	35	9	-	35	-	35	
MAINLINE	357+80.00 - 357+95.00	RT	15	9	-	-	8	15	
MAINLINE	372+00.00 - 372+65.00	RT	65	9	-	65	-	65	
MAINLINE	372+96.00 - 374+00.00	LT	104	9	-	104	-	104	
MAINLINE	509+75.00 - 510+00.00	RT	25	9	25	-	-	-	
1525TH ST	5+27.00 - 6+15.31	RT	88	29	284	-	-	-	
1525TH ST	5+54.00 - 6+15.31	LT	61	31	210	-	-	-	
2100TH ST	87+82.00 - 88+14.00	RT	32	10	-	36	-	36	
2100TH ST	88+62.00 - 88+92.00	RT	23	10	-	26	-	26	
TOTALS:						1335	1476	325	2120

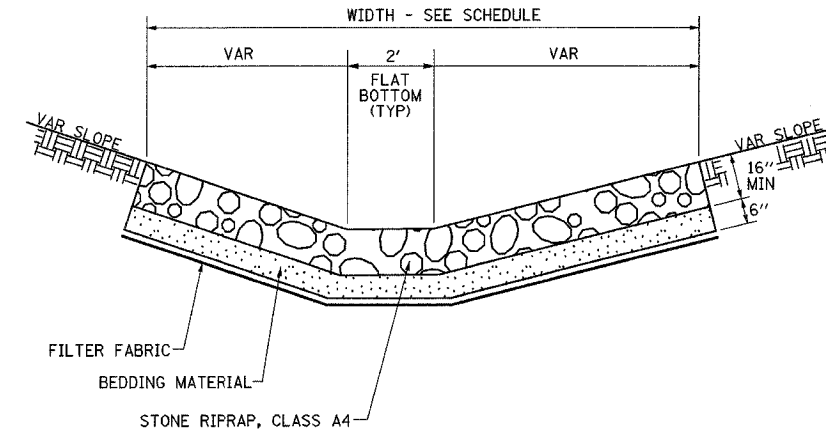

DETAIL OF STONE RIPRAP, CLASS A4

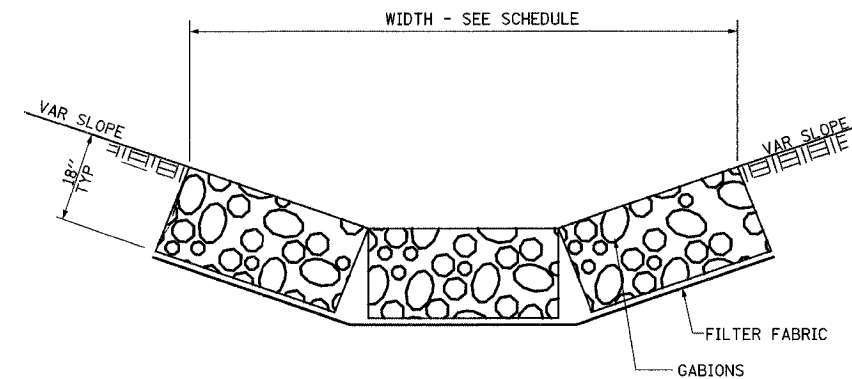

DETAIL OF GABIONS

(ASSUMED GABION BASKET SIZE OF 3'Wx6'Lx18\"/>

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

DITCH RIPRAP SCHEDULE AND DETAILS

DATE 9/01 DRAWN BY MLO CHECKED BY TGC