



ANY TRAFFIC SIGNAL CONTROL EQUIPMENT DAMAGED OR NOT OPERATING PROPERLY FROM ANY CAUSE WHATSOEVER SHALL BE REPAIRED WITH NEW EQUIPMENT PROVIDED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CONTRACT AND OR OWNER OF THE TRAFFIC SIGNAL SYSTEM, ALL AS APPROVED BY THE ENGINEER.

RESTORATION OF WORK AREA. RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.

**CONSTRUCTION NOTES:**

SEE SIGNAL PLAN SHEET FOR SIGNAL HEAD LOCATION DURING EACH STAGE OF CONSTRUCTION

① DURING STAGE 1B LEFT TURN SIGNAL HEADS SHALL BE COVERED AT THIS LOCATION.

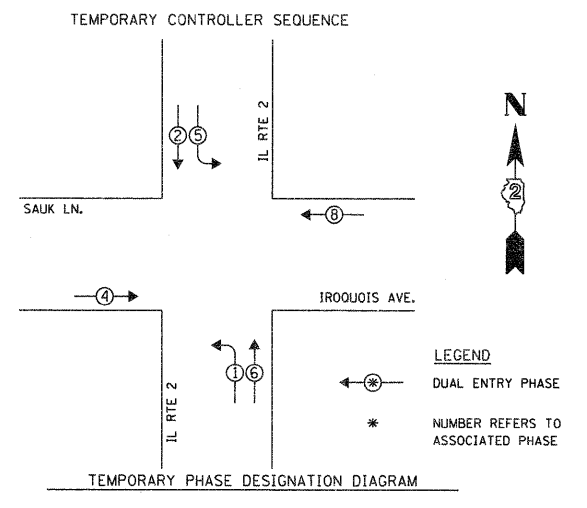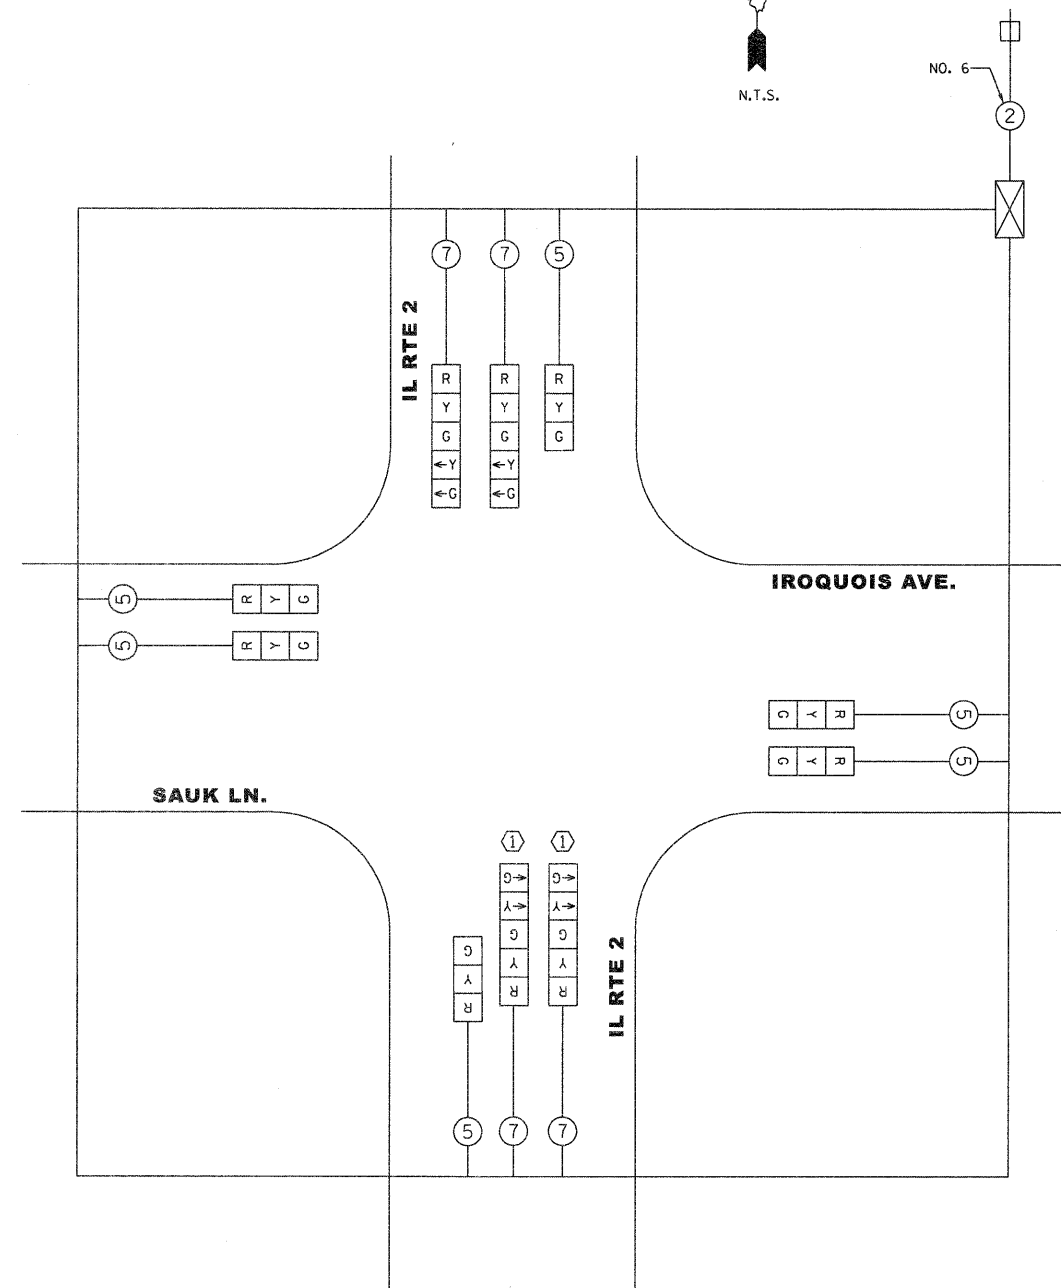

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO. OF LAMPS	WATTAGE			
		INCAND.	LED	% OPERATION	
SIGNAL (RED)	10		17	0.50	85.0
(YELLOW)	10		25	0.25	62.5
(GREEN)	10		15	0.25	37.5
ARROW	8		12	0.10	9.6
PED. SIGNAL	0		25	1.00	0.00
CONTROLLER	1		100	1.00	100.0

ENERGY COSTS TO: TOTAL = 294.6

ILLINOIS DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS/DISTRICT 2

ENERGY SUPPLY: CONTACT: XXX  
PHONE: (800) 334-7661  
COMPANY: COMED

FILE NAME = D201500-shr-temp-ts06.dgn	USER NAME = TERRA	DESIGNED - MCH	REVISED -
		DRAWN - MCH	REVISED -
	PLOT SCALE = 20,000' / IN.	CHECKED - DPA	REVISED -
	PLOT DATE = 2/3/2012	DATE - 01/17/12	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**TEMPORARY CABLE PLAN  
IL ROUTE 2 AND IROQUOIS AVES/SAUK LN**

SCALE: SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
742	34R	WINNEBAGO	491	291
				CONTRACT NO. 64515
ILLINOIS FED. AID PROJECT				