


Plan View

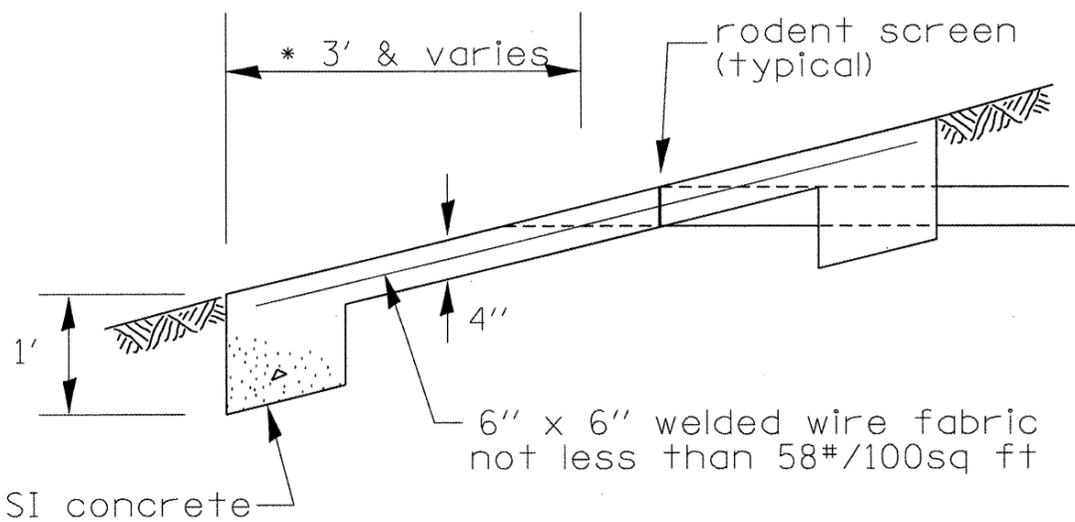

Class SI concrete

Outlets are to be constructed in accordance with applicable portions of Section 606 of the Standard Specifications.

This work will be measured for payment at the contract unit price per cubic yard for CLASS SI CONCRETE (OUTLET), SPECIAL and at the contract unit price per square yard for WELDED WIRE FABRIC 6 X 6.


Excavation and backfill required for this work will not be measured for payment.

Rodent Screens shall be in accordance with Article 601.05 of the Standard Specifications and State Standard 601101.

Pipe underdrain (special) shall be Polyvinyl Chloride (PVC) Pipe in accordance with Art. 601.02 (1) of the Standard Specifications.

proposed  
Pipe Underdrain (Special)

Quantities for *Standard Outlet Special		
Type	Class SI Cu Yd	WWF Sq Yd
I	.61	2.75
II	.86	3.75
III	1.35	6.75

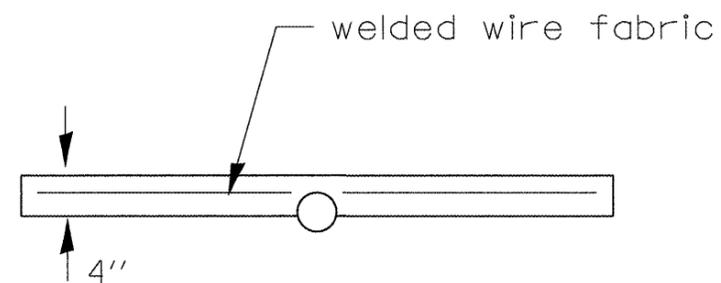

section A-A