


**PARAPET/SAFTEY WALK
CONFIGURATIONS**
(NOT TO SCALE)

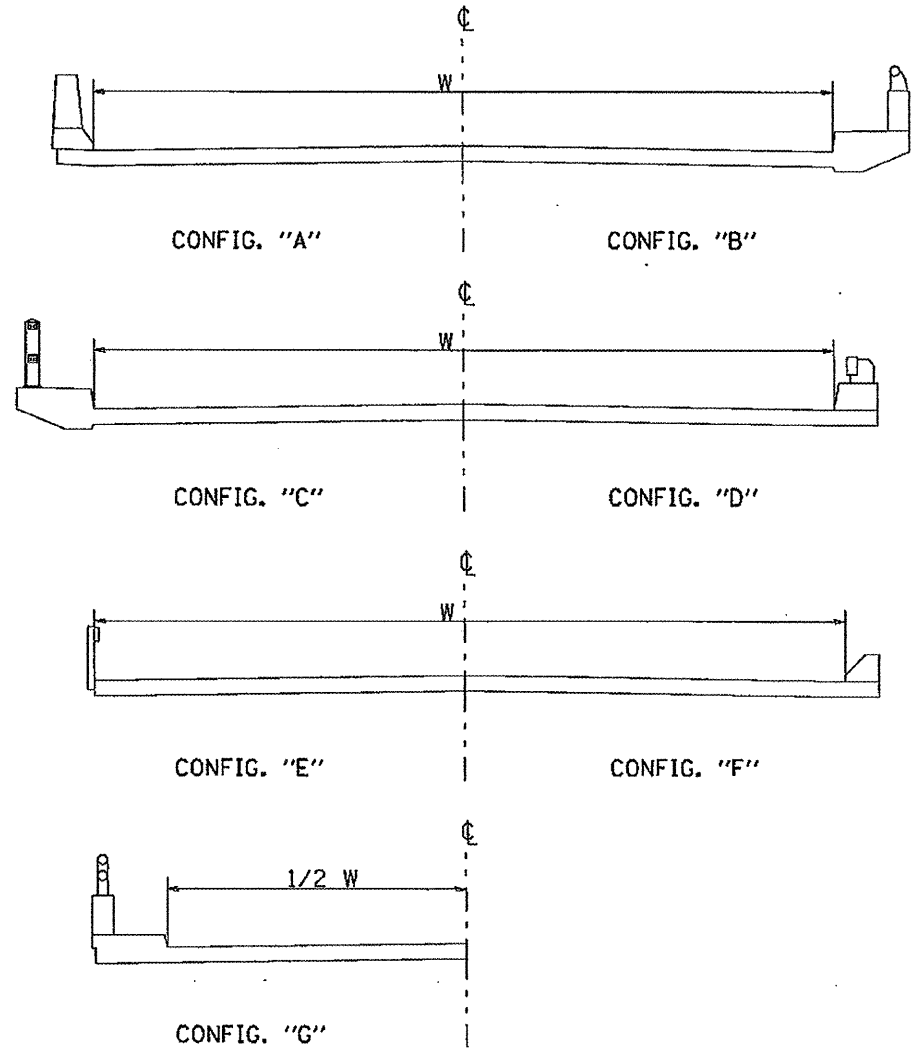

Existing pavement markings shall be temporarily covered prior to application of the deck surface treatment, to prevent the material from being applied to the markings. The temporary covering shall be removed after application of the deck surface treatment and prior to opening to traffic. Cost is included with the deck surface treatment specified.

BRIDGE DECK SEALING SCHEDULE WILLIAMSON COUNTY

WILLIAMSON		Route	DECK AREA SQ YDS	DIMENSIONS		MISC. AREA PARAPET/SAFTEYWALK		PROTECTIVE COAT
STRUCTURE NUMBER				L	W	SQ YD	CONFIG.	SQ YD
1	100-0010	I-57 NB	169	39	39	31	C	200
2	100-0011	I-57 SB	169	39	39	31	C	200
3	100-0018	IL-13 EB	587	132	40	103	A	690
4	100-0020	IL-13 EB	547	123	40	96	A	643
5	100-0022	IL-13 EB	428	108	36	86	C	514
6	100-0023	IL-13 WB	428	108	36	86	C	514
7	100-0029	IL-166	556	156	32	122	A	678
8	100-0032	IL-148	1600	450	32	350	A	1950
9	100-0033	IL-148	633	178	32	138	A	771
10	100-0036	IL-148-FAP 726	169	38	40	30	A	199
11	100-0037	IL-148	309	99	28	79	C	388
12	100-0044	FAS 1900-CH 25	699	242	26	193	C	892
13	100-0053	TR 23	673	233	26	186	C	859
14	100-0055	Westminster Dr	511	192	24	152	C	663
15	100-0057	CH 4	751	242	28	192	C	943
16	100-0059	I-24 RAMP	760	279	25	217	A	977
17	100-0060	I-24 EB	1774	394	41	307	A	2081
18	100-0062	FAS 907-CH 9	1685	474	32	369	A	2054
19	100-0066	IL-13 WB	593	134	40	104	A	697
20	100-0067	IL-13 WB	549	124	40	96	A	645
21	100-0068	IL-13 WB	660	149	40	116	A	776
22	100-0070	IL-166	430	121	32	94	A	524
23	100-0071	IL-13 EB	661	149	40	116	A	777
24	100-0072	IL-37	816	204	36	159	A	975
25	100-0073	IL-37-FAS 2887	333	76	39	59	A	392
26	100-0074	IL-148-FAP 726	326	105	28	84	C	410
27	100-0075	FAS 908	258	65	36	50	A	308
28	100-0076	I-57 NB	1162	174	60	135	A	1297
29	100-0077	I-57 SB	1163	174	60	135	A	1298
30	100-0078	I-57 NB	1351	156	78	121	A	1472
31	100-0079	I-57 SB	1413	156	82	121	A	1534
32	100-0091	IL-37	529	119	40	93	A	622
33	100-0092	Morgan Ave.	1440	370	35	288	A	1728
TOTAL			24135			4536		28672

FILE NAME =	USER NAME = walkarra	DESIGNED - RUSS WALKER	REVISED -
at:\pr_work\pvidet\walkarra\d0204276\782	4-shit-plen.dgn	DRAWN - RUSS WALKER	REVISED -
	PLOT SCALE = 100.0000 / 1 in.	CHECKED -	REVISED -
	PLOT DATE = 3/13/2012	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	09 DECK SEAL 2012-2	VARIOUS	5	3
ILLINOIS FED. AID PROJECT			CONTRACT NO. 7B284	