
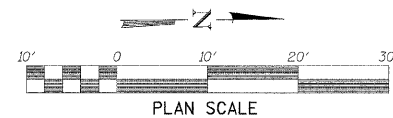


DATE	
BY	
REVIEWED	
DESIGNED	
CHECKED	
ALIGNMENT	
GRADES	
NOTED	
NO.	
FILE NAME	

DATE	
BY	
REVIEWED	
DESIGNED	
CHECKED	
ALIGNMENT	
GRADES	
NOTED	
NO.	
FILE NAME	

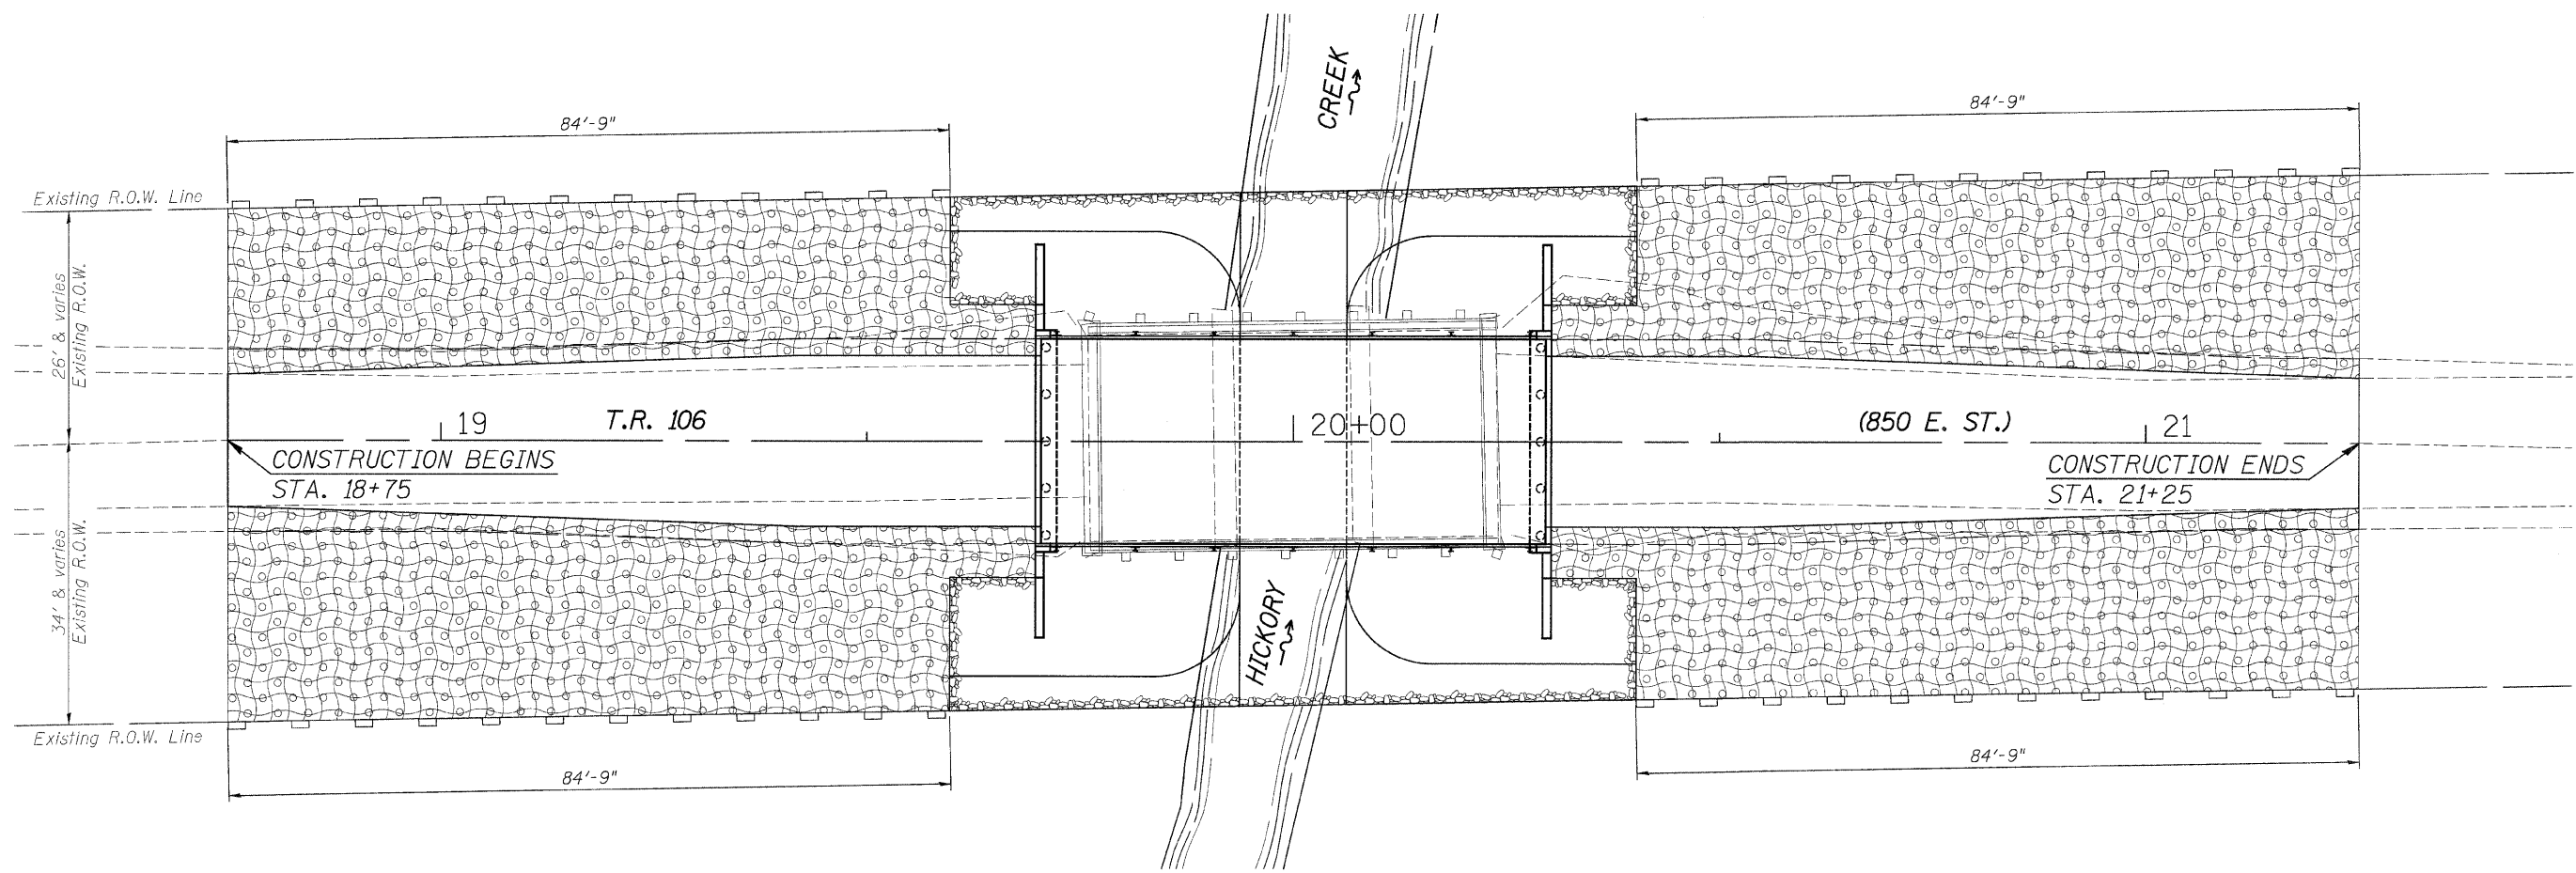

EROSION CONTROL NOTES

The soil erosion and sediment control practices will be inspected weekly and after 1/2" of rain or more by the individual on site in charge of soil erosion and sediment control during the construction of the project.

Perimeter erosion barrier shall comply with Section 280 of the Standard Specifications and shall be placed as shown on the Erosion Control Plan and in accordance with stations shown on the Schedule of Quantities sheet or as directed by the Engineer.

Silt fence shall be installed following the completion and stabilization of all areas adjacent to the on-site drainages. The silt fence will remain in place until the contributing area is stabilized.

For Seeding, Class 3 (Special) see Special Provisions.




Erosion control blanket shall be placed in ditches and to all disturbed areas as shown on this Erosion Control Plan sheet and in accordance with Section 251 of the Standard Specifications for Road and Bridge Construction.

The use of green dye in the erosion control blanket is not acceptable.

Stockpiles of soil and other building materials to remain in place more than 3 days shall be furnished with erosion and sediment control measures (i.e. perimeter silt fence). Stockpiles to remain in place for 14 days or more shall receive temporary seeding.

All adjacent streets must be kept clear of debris. Inspected daily and cleaned when necessary.

LEGEND

-  Perimeter Erosion Barrier
-  Seeding, Class 3 (Special)
-  Erosion Control Blanket

BILL OF MATERIAL

Item	Unit	Quantity
Erosion Control Blanket	Sq. Yd.	956
Perimeter Erosion Barrier	Foot	534
Seeding, Class 3 (Special)	Acre	0.20

DESIGNED	- MICHAEL WAGNER	REVISED	-
CHECKED	- MEGAN CACKLEY	REVISED	-
DRAWN	- RON ALLEN	REVISED	-
CHECKED	- BRIAN CONVERSE	REVISED	-

BUREAU COUNTY
T.R. 106 (850 E. ST.) OVER HICKORY CREEK
STATION 20+00

EROSION CONTROL PLAN
STRUCTURE NO. 006-4218

SCALE: 1" = 10'-0" SHEET NO. 1 OF 1 SHEETS STA. 18+50.00 TO STA. 21+50.00

TWP. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
106	08-15119-00-BR	BUREAU	18	6
WHA# 1287D10		CONTRACT NO. 87523		
ILLINOIS/FED. AID PROJECT BR03-00110861				

FILE = SA\PROJECTS\2018\1287D10_Bureau_Co_T106\DESIGN\STRUCT\08-15119-00-BR\06-4218.Erosion.dgn