06-15-2018 LETTING ITEM 078

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION


INDEX OF SHEETS: 1. COVER SHEET/INDEX OF SHEETS

- 2. HIGHWAY STANDARDS, GENERAL NOTES AND
- COMMITMENTS
- 3. SUMMARY OF QUANTITIES
- 4. GUIDE FOR PLACING BARRICADES AT DAMAGED GUARDRAIL AND CABLE GUARD

PROPOSED HIGHWAY PLANS


VARIOUS ROUTES SECTION DIST 8 TCD 2019–1 DELIVER, SET UP, MAINTENANCE AND PICK UP OF TRAFFIC CONTROL DEVICES VARIOUS COUNTIES

C-98-241-18

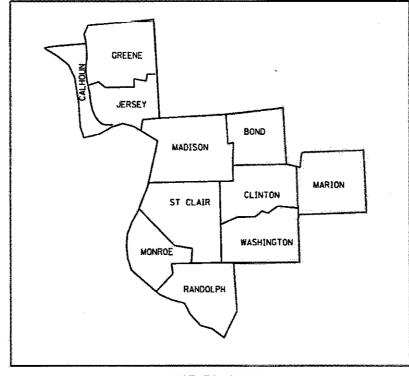

NOT TO SCALE

NOTE: WORK CAN BE LOCATED WITHIN ANY OF THE ABOVE NOTED COUNTIES WITHIN DISTRICT 8 /REGION 5.



ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E. Joint utility location information for excavation 1–800–892–0123 DR 811


PROJECT ENGINEER: HERVE GELIN (618) 346-3179 SQUAD LEADER: CECIL DOWNING (618) 346-3186


CONTRACT NO. 76L52


0

0

0



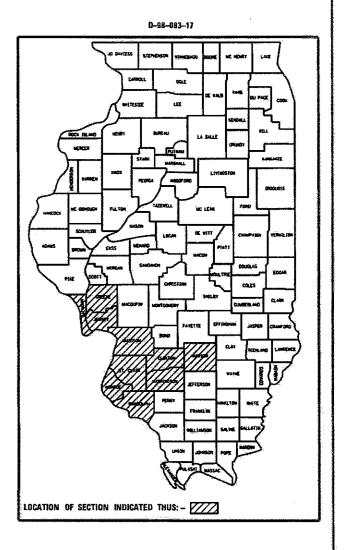



PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

HIGHWAY STANDARDS

000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
701001-02	OFF-RD OPERATIONS, 2L, 2W, MORE THAN 15' AWAY
701006-05	OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701011-04	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701101-05	OFF-RD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' AWAY
701301-04	LANE CLOSURE, 2L, 2W, SHORT TERM OPERATIONS
701311-03	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY
701426-09	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPER., FOR SPEEDS ≥45 MPH
701901-07	TRAFFIC CONTROL DEVICES

GENERAL NOTES

- ① ILLINOIS STATE LAW REQUIRES A 48-HOUR NOTICE TO BE GIVEN TO UTILITIES BEFORE DIGGING. FIELD MARKING OF FACILITIES MAY BE OBTAINED BY CONTACTING J.U.L.I.E. (1-800-892-0123 OR 811) OR FOR NON-MEMBERS THE UTILITY COMPANY DIRECTLY.
- THE LOCATIONS OF THE DELIVERY, SETUP, MAINTENANCE, AND PICK UP OF TRAFFIC CONTROL DEVICES SHALL BE DETERMINED BY THE DISTRICT 8 TRAFFIC MANAGEMENT CENTER (618-346-3233).
- (3) ANY CALL OUT MAY BE CANCELLED AT THE DEPARTMENT'S DISCRETION.

COMMITMENTS

NONE


FILE NAME =	USER NAME = jeffersonts	DESIGNED -	REVISED -		HIGHWAY STANDARDS, GENERAL NOTES		SECTION	COUNTY	TOTAL SHEET
	uments\IDDT Offices\District 8\Projects\D87			STATE OF ILLINOIS		VAR DIS	ST 8 TCD 2019-1	VARIOUS	4 2
			REVISED	DEPARTMENT OF TRANSPORTATION					NO. 761.52
SMUDELNAMES	PLOT DATE = 12/11/2017	DATE	REVISED -		SCALE: SHEET OF SHEETS STA TO STA		ILL MOIS FED. AID	PROJECT	

SUMMARY OF OUANTITIES

			100% STATE	CONSTR. CO
CODE			TOTAL	ROADWAY 0021
NO.	(TEM	UNIT	OUANTITY	
X0327500	ARROWBOARD (TRAILER MOUNTED)	HOUR	4000	4000
x0327623	BARRICADES, VERTICAL WITH WARNING LIGHT	CAL DA	8000	8000
x0327624	BARRICADES, TYPE II WITH WARNING LIGHT	CAL DA	200	200
x0327625	BARRICADES, TYPE I WITH EXTENDED LEGS AND WARNING LIGHT	CAL DA	25	25
x0327626	BARRICADES, TYPE III WITH WARNING LIGHT	CAL DA	50	50
x0327627	BARRICADES, TYPE III WITH WARNING LIGHT AND ROAD CLOSED SIGN	CAL DA	25	25
x0327628	BARRICADES, DIRECTION INDICATOR WITH WARNING LIGHT	CAL DA	3500	3500
x0327629	DRUM WITH WARNING LIGHT	CAL DA	100	100
x0327630	SIGN PANEL, FLUORESCENT ORANGE	CAL DA	1200	1200
KO327631	SIGN PANEL, FLUORESCENT ORANGE WITH STAND AND WARNING LIGHT	CAL DA	500	500
x0970001	WORK ZONE SPEED LIMIT SIGN ASSEMBLY	CAL DA	300	300
x7010410	SPEED DISPLAY TRAILER	CAL MO	5	5
x7015005	CHANGEABLE MESSAGE SIGN	CAL DA	50	50

•

FILE NAME +	USER NAME = jeffersonte	DESIGNED -	REVISED -			F.A. SECTION	COUNTY TOTAL SHEET
perVIL084EBIDINTEG.tilinors.govsPVID0T\D	ALLERATEBIOINTEG.LILInois.gov/PVIDOT\Documents\1007_Offices\District_B\Projects\D876_SCHRBData\6ADubects\D876_52=sht=zove			SUMMARY OF QUANTITIES	VAR DIST 8 TCD 2019-1	VARIOUS 4 3	
	PLOT SCALE = 188,8839 1 / IN.	CHECKED	REVISED -	DEPARTMENT OF TRANSPORTATION			CONTRACT NO. 76L52
	PLOT DATE > 1/38/2818	DATE -	REVISED -		SCALES SIEET OF SIEETS STA, TO STA.	ILLINOIS FED. A	ALD PROJECT

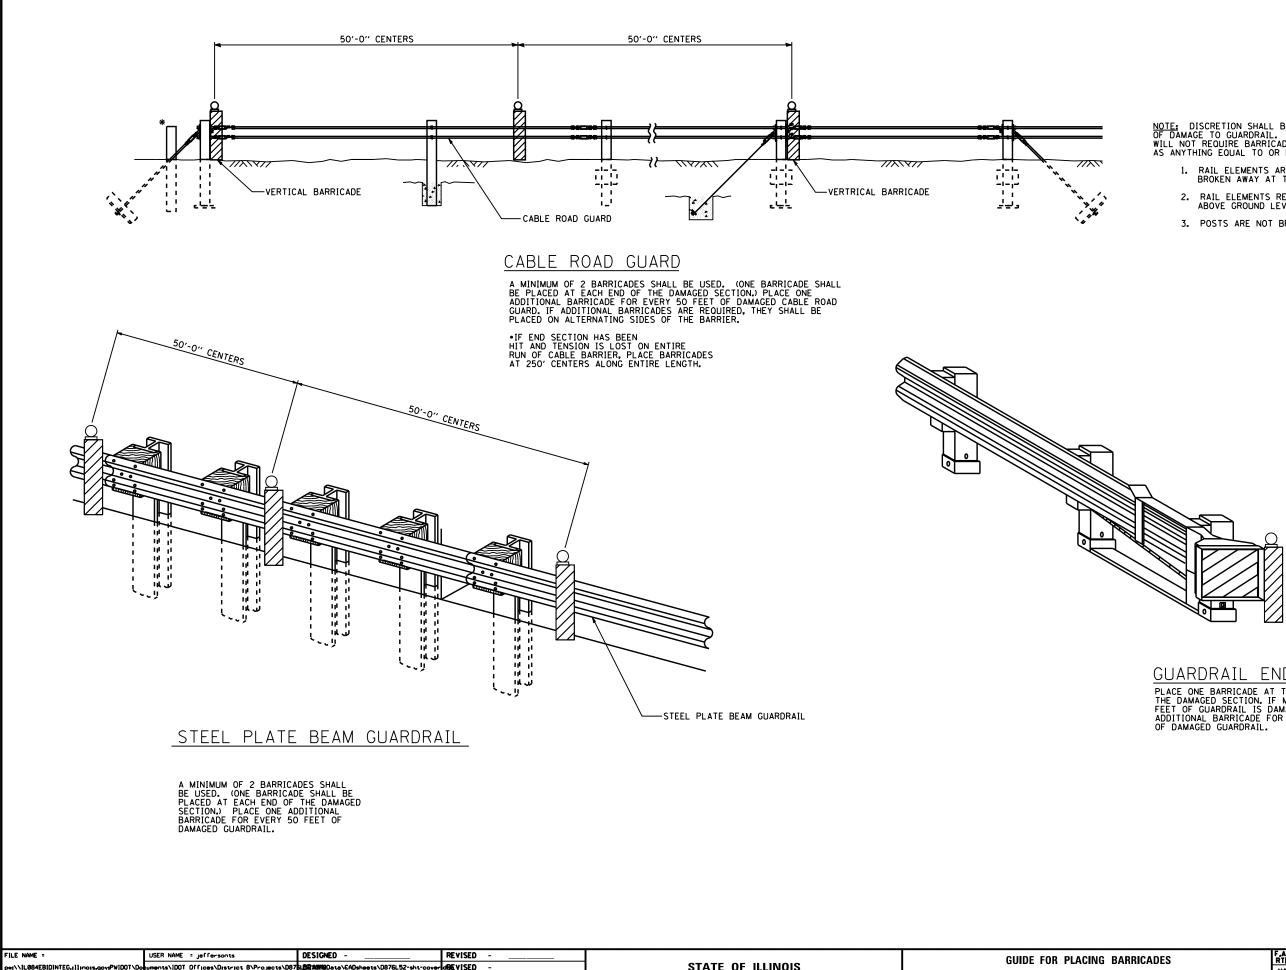

FILE NAME =	USER NAME = jeffersonts	DESIGNED -	REVISED		GUIDE FOR PLACING BARRICADES	F.A. SECTION	COUNTY TOTAL SHEET SHEETS NO.	
pes/\\IL084EBIDINTEG.s11snoss.govsPWIDOT\Do	tuments\1007_Offices\District_8\Projects\087	5L DRXXXII Data\EADsh <u>eets\D876L52-</u> sht-cover	agevised	STATE OF ILLINOIS		VAR DIST 8 TCD 2019-1	VARIOUS 4 4	
	PLOT SCALE = 99,9934 ' / In.	CHECKED	REVISED -	DEPARTMENT OF TRANSPORTATION	AT DAMAGED GUARDRAIL AND CABLE GUARD		CONTRACT NO. 76L52	
\$MODELNAME\$	PLOT DATE = 12/8/2017	DATE -	REVISED -		SCALE: SHEET OF SHEETS STA TO STA		D. AID PROJECT	

NOTE: DISCRETION SHALL BE USED WHEN DETERMINING THE EXTENT OF DAMAGE TO GUARDRAIL. GUARDRAIL RECEIVING MINOR DAMAGE WILL NOT REOUIRE BARRICADES. MINOR DAMAGE SHALL BE CONSIDERED AS ANYTHING EQUAL TO OR LESS THAN THE FOLLOWING:

- 1. RAIL ELEMENTS ARE INTACT, (I.E. RAIL IS NOT "RIPPED" OR BROKEN AWAY AT THE CONNECTING BOLTS).
- 2. RAIL ELEMENTS REMAIN AT A HEIGHT OF 18 TO 24 INCHES ABOVE GROUND LEVEL.
- 3. POSTS ARE NOT BROKEN OR DETACHED FROM RAIL ELEMENT.

GUARDRAIL END SECTION

PLACE ONE BARRICADE AT THE END OF THE DAMAGED SECTION. IF MORE THAN 50 FEET OF GUARDRAIL IS DAMAGED. PLACE ONE ADDITIONAL BARRICADE FOR EVERY 50 FEET OF DAMAGED GUARDRAIL.