

CONSTRUCTION NOTES:

Maintain 5' Minimum Depth (top of Pipe) → Sta. 00+25 - Tie to Exsiting H.P. Main

Sta. 02+46 - Start Maintaining 5' from R.O.W. →

Abandon Pipe Will Be Grouted

LEGEND:


- UIUC 8" GAS LINE
- GROUND LEVEL DEPTH (Surface)
- PROPOSED GAS LINE (Top of Pipe)

MATERIALS:

MKT NO.	QTY.	DESCRIPTION
1	1006'	8" Steel Pipe - 8.625" O.D., 250 wall, API 5L, Grade B Fusion Bonded Epoxy Coated
2	1	8.625 - 3R Weld 45 Ell

MATERIALS:

MKT NO.	QTY.	DESCRIPTION

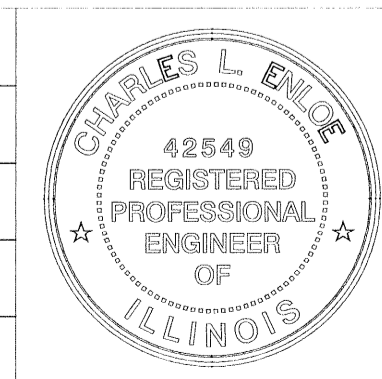

Revisions
 19-Oct-05 SDP
 23-Nov-05 SDP

Utility Safety & Design, Inc.
 #9 Executive Woods Court Suite 1
 Belleville, Illinois

Relocate UI Lateral
 Natural Gas Pipeline for
 Phase 2 of Curtis Road Improvements
 Station 00+00 to Station 10+00 | U1

Scale: 1" = 40'