ROUTE	SECTION	COUNTY	TOT. SHTS.	SHT.
T.R. 259	04-03114-00-BR	JEFFERSON	14	10
CASNER TOWNSHIP ROAD DISTRICT				

CONTRACT 95470

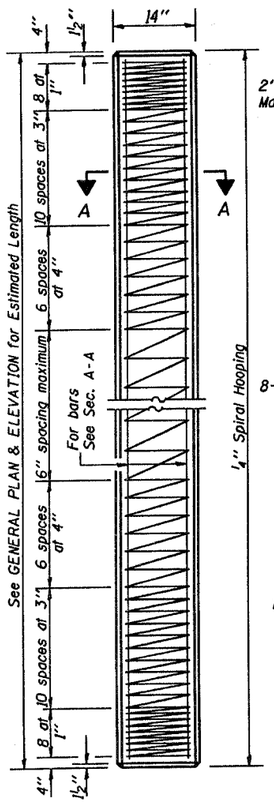



SECTION A-A
FOR PILES UNDER 45' LONG



SECTION A-A
FOR PILES 45' OR MORE

Handling: For Pile lengths up to 45' use two slings placed at a distance of 0.21L from each end. For Piles longer than 45', use three slings placed at a distance of 0.12L from each end and at mid point of pile.

DETAIL OF PRECAST CONCRETE PILES

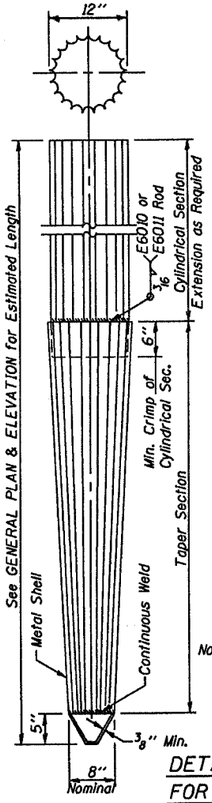



FIELD CRIMP DETAIL

Note: 6" Crimp shall either be supplied on the cylindrical section or made in the field as detailed.



OPTIONAL FLAT END

ALLOWABLE TAPER SECTIONS

10' Length-Taper 1" in 2'-6"
17' Length-Taper 1" in 4'-0"
25' Length-Taper 1" in 7'-0"
30' Length-Taper 1" in 7'-0"

Note: The thickness of the shell shall be 0.1495 inches with a tolerance of 5%. The shell shall be according to Article 1006.05 (a) of the Standard Specification except that minimum yield strength for the steel after cold working shall be 50,000 p.s.i.

DETAIL OF TAPERED METAL SHELLS FOR CAST IN PLACE CONCRETE PILES

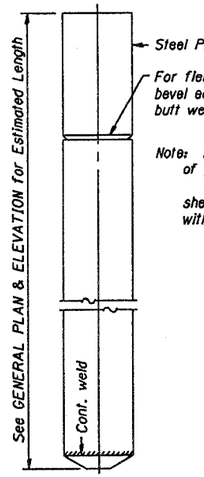

Note: Driving and bearing ends of pipe shall be cut square. The thickness of the shell shall be 0.1793 inches with a tolerance of 5%.

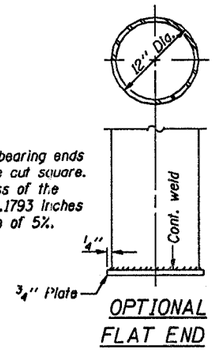

OPTIONAL FLAT END

DETAIL OF CYLINDRICAL STEEL SHELL FOR CAST IN PLACE CONCRETE PILES

Reinforcement cage shall be omitted when Concrete Encasement is provided.

The cost of Reinforcement is included with the Cost of Furnishing Piles.

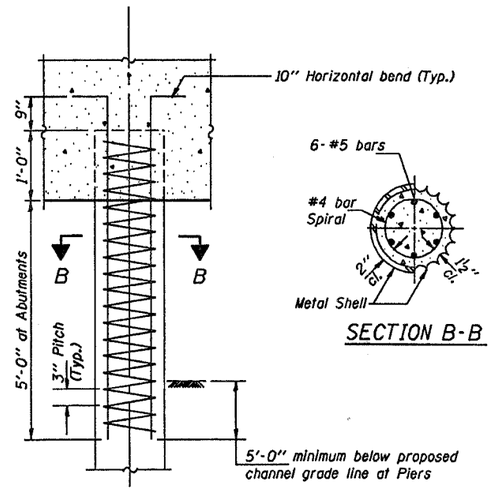

SECTION B-B

DETAIL OF REINFORCEMENT FOR METAL SHELLS

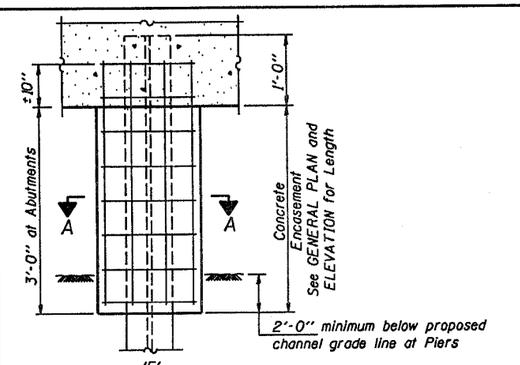

Welded wire fabric 6 x 6-W4.0 x W4.0 weighing 58#/100 sq. ft. The cost of Reinforcement is included with the cost of Concrete Encasement. Forms for Encasement may be omitted when soil conditions will permit.

SECTION A-A

Pile	'F'
HP8	1'-6"
HP10	1'-9"
HP12	2'-0"

DETAIL OF HP PILE ENCASEMENT

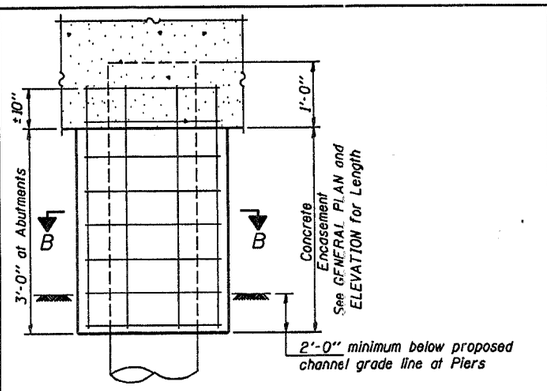

Welded wire fabric 6 x 6-W4.0 x W4.0 weighing 58#/100 sq. ft. The cost of Reinforcement is included with the cost of Concrete Encasement. Forms for Encasement may be omitted when soil conditions will permit.

SECTION B-B

DETAIL OF METAL SHELL PILE ENCASEMENT

QUANTITIES/FT. OF ENCASEMENT

(STEEL PILES)

Pile Size	Item	Quantity
HP8	Concrete Encasement	0.063 C.Y.
HP10	Concrete Encasement	0.086 C.Y.
HP12	Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Concrete Encasement	0.087 C.Y.

Illinois Department of Transportation

PASSED FEBRUARY 1, 2000
Thomas J. Domagalski
Engineer of Bridge Design

APPROVED FEBRUARY 1, 2000
Ralph E. Anderson
Engineer of Bridges and Structures

ISSUED 1-1-88

PILE DETAILS

STANDARD CX-1