


ROUTE	SECTION	COUNTY	TOT. SHTS.	SHT.
FAS 830	03-00181-00-RS	JEFFERSON	2	1
JEFFERSON COUNTY ROAD DISTRICT				

CONTRACT 95475

# STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

**INDEX OF SHEETS**

1. COVER SHEET, LOCATION MAP, SCHEDULE OF QUANTITIES
2. GENERAL NOTES, TYPICAL EXISTING AND PROPOSED CROSS-SECTIONS, BITUMINOUS CONCRETE SUPERPAVE BREAKDOWN, STRIPING, DETAILS OF SIDE ROADS, PRIVATE ENTRANCES AND MAILBOX TURNOUTS

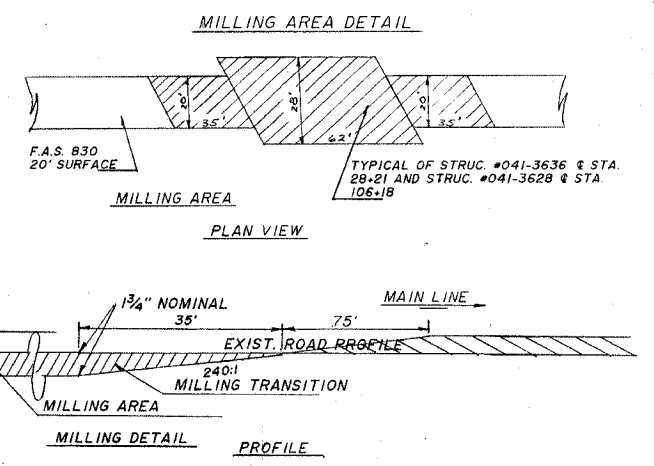

## PLANS FOR PROPOSED FEDERAL AID SECONDARY PROJECT

F.A.S. 830 C.H. 6 JEFFERSON CO.  
SECTION 03-00181-00-RS  
PROJECT #RS-830(108)  
JOB #C-97-071-06


**STANDARDS**

- 000001-04
- 442201-01
- 630001-06
- 630101-06
- 701006-02
- 701306-01
- 701311-02
- 701336-04
- 702001-06
- 780001-01
- B.L.R. 21-6
- B.L.R. 22-4

SCHEDULE OF QUANTITIES			
Quantity	Unit	Item	Code Number
1936	FOOT	SHORT-TERM PAVEMENT MARKING REMOVAL	XX003140
697	SQ. YD.	COLD MILLING	Z0010700
210	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
4619	TON	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", NSO	X4066414
4404	GALLON	BITUMINOUS MATERIALS (PRIME COAT)	40600100
2597	TON	LEVELING BINDER (MACHINE METHOD), SUPERPAVE NSO	X4066765
12	SQ. YD.	CLASS D PATCHES, TYPE III, 9 INCH	44201753
21	SQ. YD.	CLASS D PATCHES, TYPE III, 9 INCH	44201757
59	SQ. YD.	CLASS D PATCHES, TYPE IV, 9 INCH	44201759
1	L. SUM	MOBILIZATION	67100100
43020	SQ. YD.	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	44300300
1258	TON	AGGREGATE SHOULDERS, TYPE B	48101200
50	FOOT	STEEL PLATE BEAM GUARDRAIL, TYPE B	63000605
39	FOOT	STEEL PLATE BEAM GUARDRAIL, ATTACHED TO STRUCTURES	63000625
2	EACH	TRAFFIC BARRIER TERMINAL TYPE 1, SPECIAL (TANGENT)	63100167
1	L. SUM	TRAFFIC CONTROL AND PROTECTION STANDARD 701106	70100600
3872	FOOT	SHORT-TERM PAVEMENT MARKING	70300100
54740	FOOT	THERMOPLASTIC PAVEMENT MARKING, LINE 4"	78000200
2	EACH	TERMINAL MARKER DIRECT APPLIED	78201000
1	L. SUM	TRAFFIC CONTROL AND PROTECTION STANDARD 701106	70100600

\* SPECIALTY ITEMS

GUARDRAIL SCHEDULE	
STEEL PLATE BEAM GUARDRAIL, ATTACHED TO STRUCTURES	STA. 159+64.63 TO 159+83.38 LT. Sta. 159+83.63 TO 160+02.38 RT.
STEEL PLATE BEAM GUARDRAIL, TYPE B	STA. 159+39.63 TO 159+64.63 LT. STA. 160+02.38 TO 160+27.38 RT.
TRAFFIC BARRIER TERMINAL TYPE 1, SPECIAL (TANGENT)	STA. 159+83.38 TO 160+33.38 LT. STA. 159+33.63 TO 159+83.63 RT.

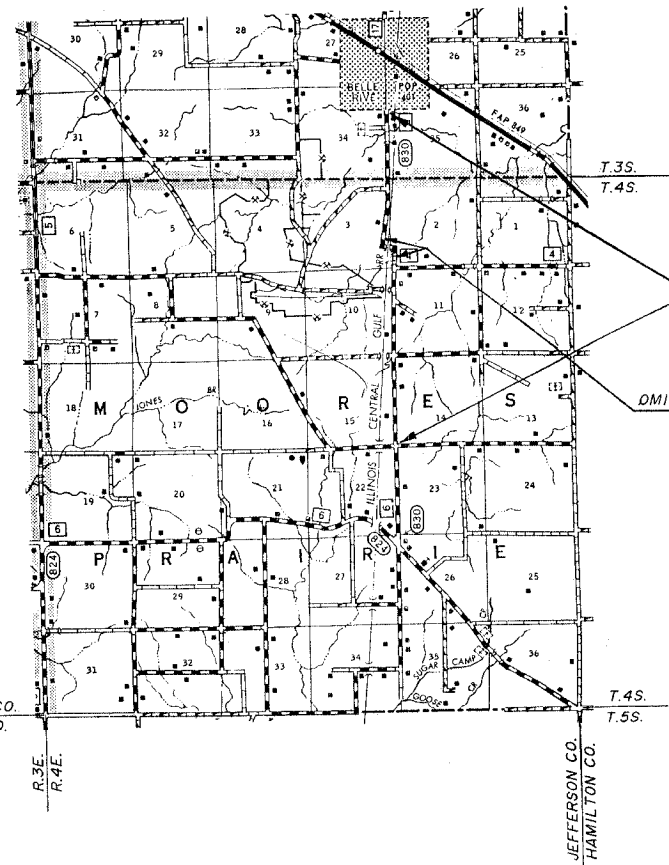

SECTION 03-00181-00-RS  
BEGINS STA. 13+20  
ENDS STA. 213+79

OMISSION STA. 90+66 TO STA. 97+66

**J.U.L.I.E.**  
JOINT UTILITY LOCATING  
INFORMATION FOR EXCAVATION  
1-800-892-0123  
WWW.ILLINOIS1CALL.COM

FUNCTIONAL CLASSIFICATION  
-LOCAL ROAD  
DESIGN SPEED=50 M.P.H.  
ADT=500

TOTAL SECTION LENGTH=20,059'=3.799 MI.  
OMISSION STA. 90+66 TO STA. 97+66=700'  
NET SECTION LENGTH=19,359'=3.667 MI.

APPROVED APRIL 3, 2006

*John S. Schvane*  
COUNTY ENGINEER  
JEFFERSON COUNTY HIGHWAY DEPT.  
750 OLD FAIRFIELD RD.  
MT. VERNON, IL 62864  
PH. (618)244-8031  
LICENSE EXP. 11-30-07

PASSED 4/18/2006

*Marcus E. Kord*  
DISTRICT SEVEN ENGINEER OF  
LOCAL ROADS AND STREETS

Releasing for bid based on limited review 4/18/2006

*Christina M. Reed*  
DEPUTY DIRECTOR OF HIGHWAYS  
REGION FOUR ENGINEER

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION