




FAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
664	*	SANGAMON	61	6
STA. TO STA.				
EXISTING CONDITIONS:				
* D-6 RESURFACING 2005-1				
CONTRACT NO. 72790				

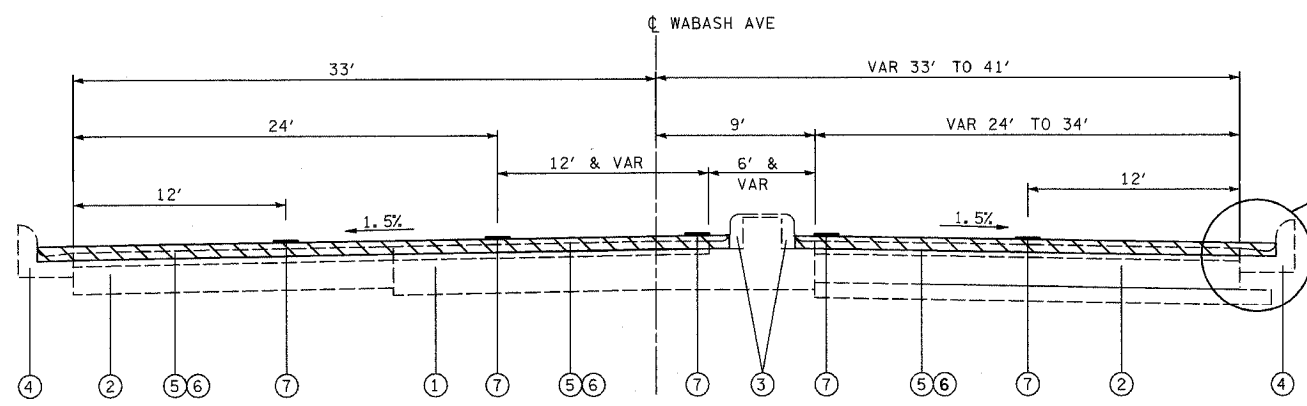


TYPICAL SECTION - WABASH AVE.
NOT TO SCALE
STA 570+40 TO STA 571+70

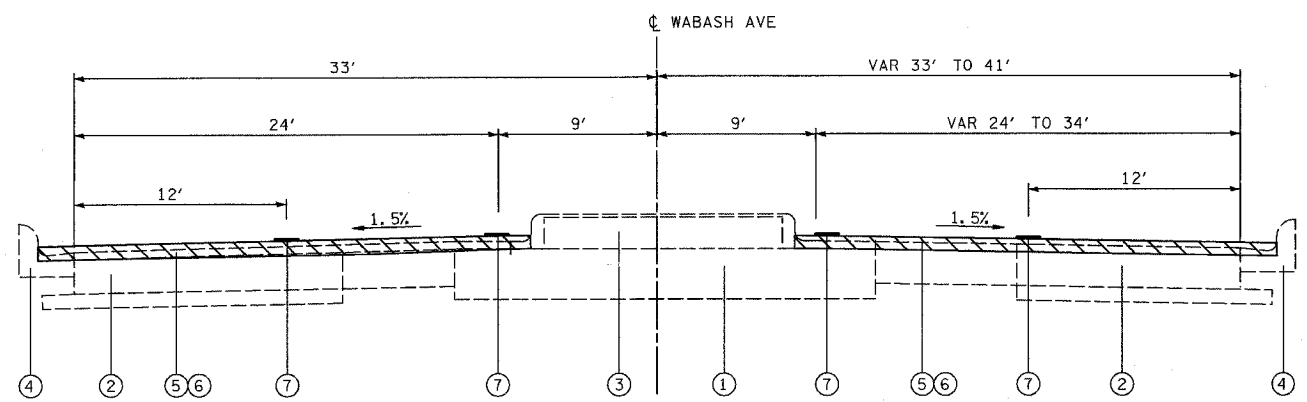

TYPICAL SECTION - WABASH AVE.
NOT TO SCALE
STA 571+70 TO STA 573+80

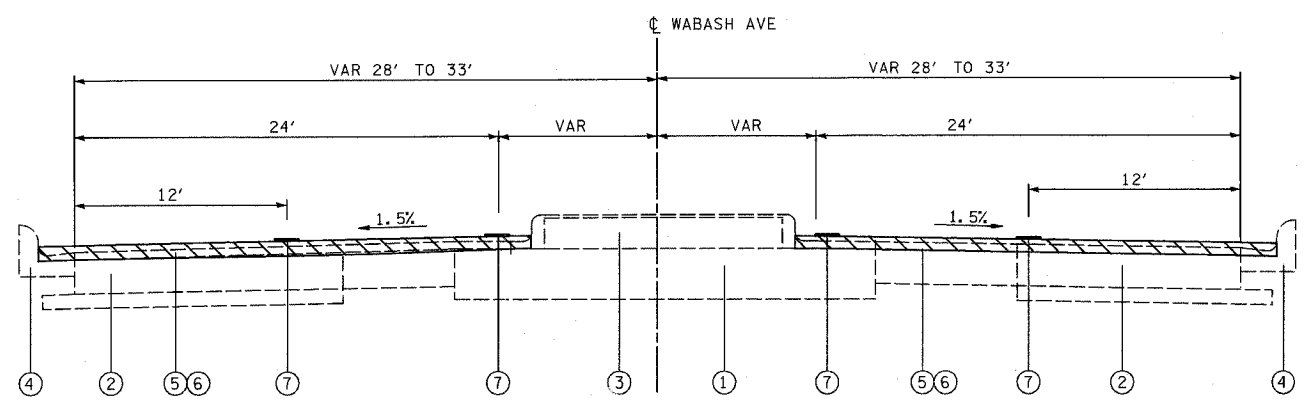


TYPICAL SECTION - WABASH AVE.
NOT TO SCALE
STA 573+80 TO STA 576+34




DETAIL

TYPICAL COMBINATION CONCRETE CURB AND GUTTER (SPECIAL)
SEE MISCELLANEOUS DETAILS

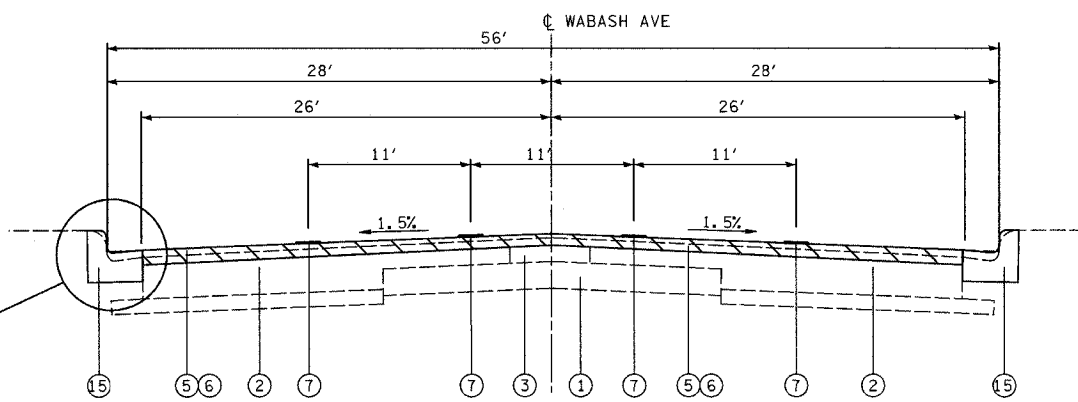

TYPICAL SECTION - WABASH AVE.
NOT TO SCALE
STA 576+34 TO STA 582+76
STA 586+40 TO STA 603+09

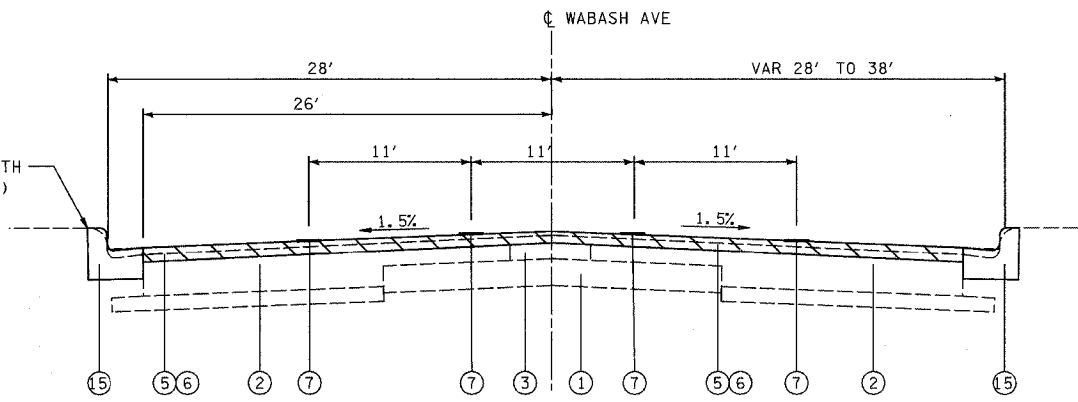

TYPICAL SECTION - WABASH AVE.
NOT TO SCALE
STA 582+76 TO STA 586+40
STA 603+09 TO STA 604+71

LEGEND

- ① EXISTING PCC PAVEMENT 9" WITH BITUMINOUS SURFACE COURSE 1/2"
- ② EXISTING PCC BASE COURSE WIDENING 8" WITH BITUMINOUS SURFACE COURSE 1/2"
- ③ EXISTING CONCRETE MEDIAN
- ④ EXISTING CONCRETE CURB AND GUTTER
- ⑤ PROPOSED BITUMINOUS SURFACE REMOVAL, 2"
- ⑥ POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX E, N90, 2"
- ⑦ PROPOSED PAVEMENT MARKING - LINE 5"
- ⑧ EXISTING BITUMINOUS BASE COURSE WITH BITUMINOUS SURFACE COURSE
- ⑨ EXISTING BRICK
- ⑩ EXISTING PCC PAVEMENT 9"-6"-9"
- ⑪ EXISTING BITUMINOUS CONCRETE, VARIABLE DEPTH
- ⑫ EXISTING PCC BASE COURSE
- ⑬ EXISTING SAND CUSHION
- ⑭ EXISTING BITUMINOUS CONCRETE VARIABLE DEPTH
- ⑮ PROPOSED COMBINATION CONCRETE CURB AND GUTTER, (SPECIAL)

RESURFACING

HOMER L. CHASTAIN & ASSOCIATES, LLP
CONSULTING ENGINEERS
DECATUR (217) 422-8544
CHICAGO (773) 714-0050
184-001397

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
FAP ROUTE 664
(WABASH AVE. & MACARTHUR BLVD)
SECTION D-6 RESURFACING 2005-1
SANGAMON COUNTY
TYPICAL SECTIONS
DRAWN BY: EMR
CHECKED BY: CAS

PLOT DATE: #DATE# #TIME# #FILENAME#

TYPICAL SECTIONS

PLAN	DATE
SURVEYED	BY
CON-SPEC	
REF-	

#DATE#
#CON-SPEC#
#REF-#
#