c:\projects\94652d\d02101pa.dgn 1/31/2005
SUP REV: 05-04-98
RIPRAP

FAP RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332	(101Z)W,RS	WHITE/ EDWARDS	198	63
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT NO.		

CONTRACT NO. 94652

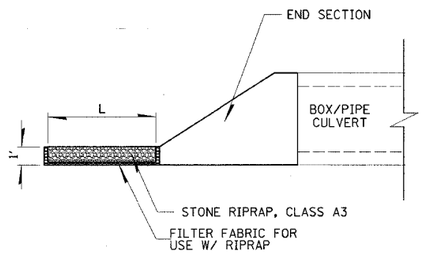

ELEVATION

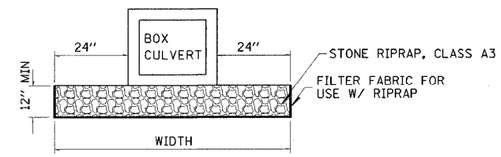

DETAIL OF RIPRAP, CLASS A3

RIPRAP FOR STORM SEWER OUTLET					
OFFSET	STATION	LENGTH (FOOT)	WIDTH (FOOT)	STONE RIPRAP CL A3 (SQ YD)	FILTER FABRIC FOR USE WITH STONE RIPRAP (SQ YD)
53' RT	11+55	51.0	5.0	28.3	40.4
WHITE COUNTY TOTAL				28.3	40.4
47' RT	16+75	45.0	5.0	25.0	35.8
31.8' RT	46+00	6.0	5.0	3.3	5.4
EDWARDS COUNTY TOTAL				28.3	41.2
TOTAL				57	82

RIPRAP/FILTER FABRIC SCHEDULE					
SIDE	STATION	LENGTH	WIDTH	STONE RIPRAP, CLASS A3	FILTER FABRIC FOR USE WITH RIPRAP
		(FOOT)	(FOOT)	(SQ FT)	(SQ FT)
RT	11+56	10.0	7.67	8.5	11.8
RT	16+88	10.0	10.0	11.1	14.7
LT	16+92	10.0	8.83	9.8	13.2
LT	23+92	10.0	7.67	8.5	11.8
RT	27+89.5	10.0	8.83	9.8	13.2
LT	28+08	10.0	8.83	9.8	13.2
TOTAL =				57.5	77.9

c:\projects\94652d\d02101pa.dgn
steffenmk "4" DATE

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

RIPRAP SCHEDULE

SCALE: VERT. HORIZ.
DATE
DRAWN BY
CHECKED BY