


- NOTES:
1. USE 13,746 S.Y. HEAVY DUTY EROSION CONTROL BLANKET, SPECIAL FOR ENTIRE BASIN B SITE.
 2. IMMEDIATELY PRIOR TO PLACING TOPSOIL INSTALL SILT FENCE AS NEEDED AT THE LIMITS OF THE TOPSOIL PLACEMENT. LIMITS TO BE DETERMINED DURING CONSTRUCTION. SEE SECTION A-A.
 3. BASIN EROSION CONTROL FROM ELEV 667.0 TO BOTTOM OF BASIN B: OVER THE WINTER THIS AREA SHALL BE COVERED BY TEMPORARY EROSION CONTROL SEEDING AND MULCH, METHOD 2.

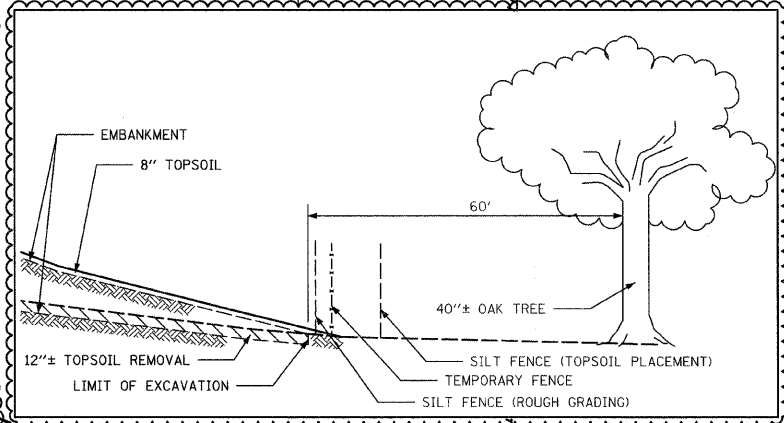

FILE NAME = shlt-erosBasinB.30scad.dgn	USER NAME = IDOT	DESIGNED - EJM	REVISED - 06/03/11 J.V.	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EROSION AND SEDIMENT CONTROL PLAN RETENTION/DETENTION BASIN B	F.A.P. RTE. 330	SECTION 128-I-3	COUNTY LAKE	TOTAL SHEETS 128	SHEET NO. 31		
PLOT SCALE = 30,0000' / IN.		DRAWN - BK	REVISED -			SCALE:	SHEET NO. OF SHEETS STA. TO STA.	CONTRACT NO. 60P33				
PLOT DATE = 6/2/2011		CHECKED - GFL	REVISED -			[ILLINOIS] FED. AID PROJECT						
DATE = 3/18/2011		DATE = 3/18/2011	REVISED -									