

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	D3 TREE PLANTING 2012		3	1
ILLINOIS			CONTRACT NO. 66B11	


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PROPOSED
HIGHWAY PLANS

FAI ROUTE 80 (I-80)
SECTION D3 TREE PLANTING 2012

LASALLE & GRUNDY COUNTY
 C-93-073-11

D-93-058-11

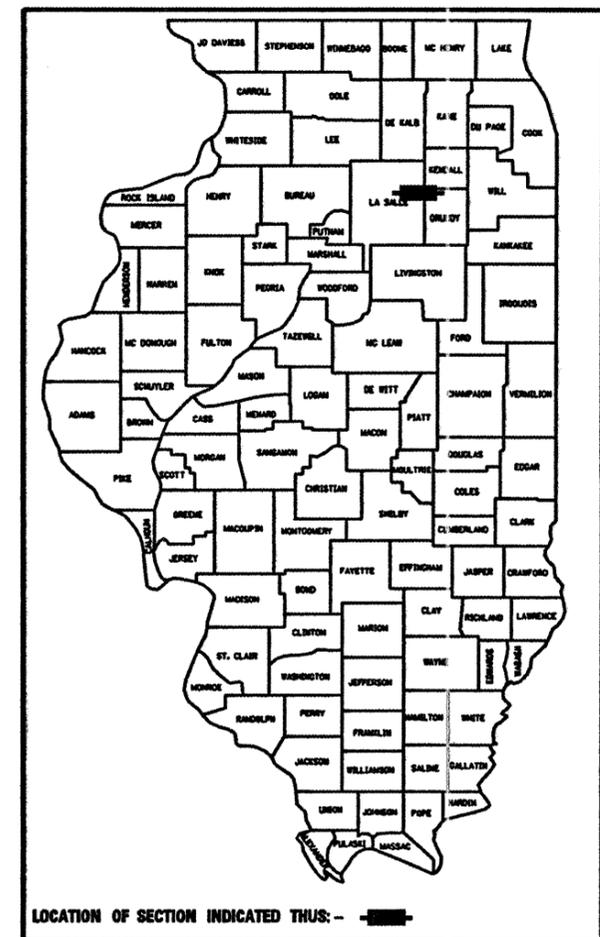


LOCATION OF SECTION INDICATED THUS: - [shaded box] -

INDEX OF SHEETS

1. COVER SHEET
2. GENERAL NOTES AND SUMMARY OF QUANTITIES
3. PLANTING DETAILS AND SHRUB PLACEMENT SCHEDULE


STANDARDS

- 000001-06 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701101-02 OFF-ROAD OPERATIONS MULTILANE, 15' (4.5 m) TO 24' (600 mm) FROM PAVEMENT EDGE
- 701105-02 OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 m) AWAY
- 701901-01 TRAFFIC CONTROL DEVICES

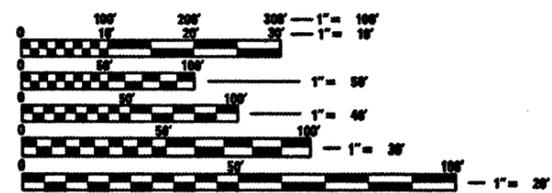

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

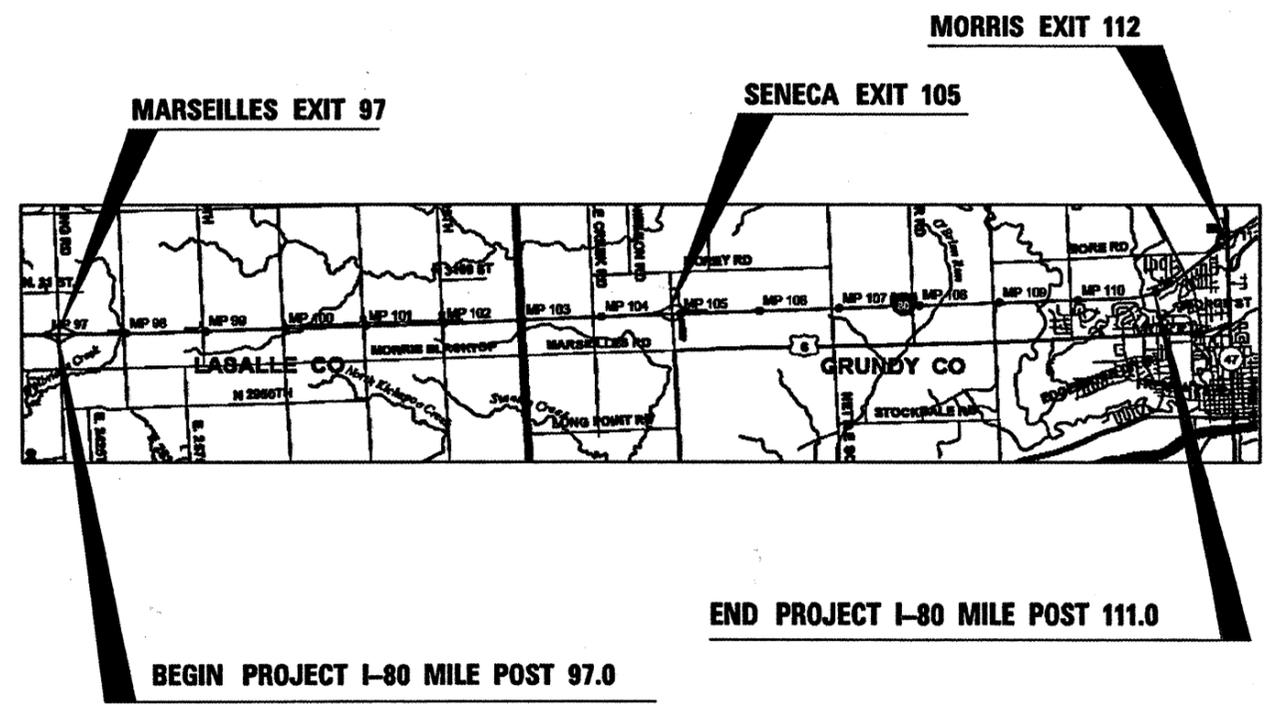

BEGIN PROJECT I-80 MILE POST 97.0

END PROJECT I-80 MILE POST 111.0

GROSS LENGTH = 14.0 MILE

PROJECT ENGINEER CRAIG REED, P.E.
PROJECT MANAGER MARK JONES, P.E.

CONTRACT NO. 66B11

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS

SUBMITTED March 15, 2011
Eric S. Thevkalderon
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

May 13, 2011
Scott E. Stitt, P.E.
 acting ENGINEER OF DESIGN AND ENVIRONMENT

May 13, 2011
Christine M. Reed
 DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES
(Revised May 13, 2009)

ABANDONED UNDERGROUND UTILITIES THAT CONFLICT WITH CONSTRUCTION SHALL BE DISPOSED OF OUTSIDE THE LIMITS OF THE RIGHT OF WAY ACCORDING TO ARTICLE 202.03 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE COST OF EARTH EXCAVATION.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

THE CONTRACTOR'S ATTENTION IS DIRECTED TO THE PRESENCE OF DEPARTMENT-OWNED UNDERGROUND ELECTRICAL CABLE WITHIN THE LIMITS OF THE PROPOSED IMPROVEMENT. THE CONTRACTOR SHALL REQUEST THE ILLINOIS DEPARTMENT OF TRANSPORTATION IN OTTAWA (815-434-8417) TO LOCATE THE UNDERGROUND FACILITIES, PROVIDING A MINIMUM OF 72 HOURS NOTICE. THE DEPARTMENT IS NOT A MEMBER OF THE JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS (JULIE) SYSTEM.

ALL DAMAGE TO DEPARTMENT OWNED UNDERGROUND FACILITIES, CAUSED BY THE CONTRACTOR SHALL BE REPAIRED TO THE SATISFACTION OF THE DEPARTMENT AT THE CONTRACTOR'S EXPENSE. THIS SHALL INCLUDE ALL TEMPORARY REPAIRS REQUIRED TO KEEP THE FACILITY OPERATIONAL WHILE MATERIAL IS BEING OBTAINED TO MAKE PERMANENT REPAIRS. SPLICING OF ELECTRIC CABLE SHALL NOT BE ALLOWED. ELECTRIC CABLE SHALL BE REPLACED FROM POLE TO POLE OR CONTROLLER.

THE CONTRACTOR SHALL CONTACT JULIE AT LEAST 48 HOURS PRIOR TO EXCAVATION TO DETERMINE WHICH UTILITIES ARE IN THE AREA.

0031

SUMMARY OF QUANTITIES				100% STATE	
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	LASALLE COUNTY QUANTITY	GRUNDY COUNTY QUANTITY
67100100	MOBILIZATION	L SUM	1	0	1
C2000636	SHRUB, ARONIA MELANOCARPA ELATA (GLOSSY BLACK CHOKEBERRY), 3' HEIGHT, BALLED AND BURLAPPED	EACH	380	0	380
C2001936	SHRUB, CORNUS SERICEA BAILEYI (BAILEY REDOSIER DOGWOOD), 3' HEIGHT, BALLED AND BURLAPPED	EACH	1110	0	1110
C2011736	SHRUB, VIBURNUM DENTATUM (ARROWWOOD VIBURNUM), 3' HEIGHT, BALLED AND BURLAPPED	EACH	325	325	0

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

PREPARED BY: Don Bonvil
DISTRICT STUDIES & PLANS ENGINEER

DATE: 3-15-11

EXAMINED BY: Herbert J. [Signature]
DISTRICT CONSTRUCTION ENGINEER

Wayne L. Phillips [Signature]
DISTRICT MATERIALS ENGINEER


Bruce A. [Signature]
DISTRICT OPERATIONS ENGINEER

FILE NAME =	USER NAME = quigley1	DESIGNED -	REVISED -
c:\pwwork\pwwork\quigley1\0258338\0366811-sht-cover.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = Mar 23, 2011 - 01:46:51 PM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES AND SUMMARY OF QUANTITIES			
SCALE:	SHEET NO. OF SHEETS	STA.	TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	D3 TREE PLANTING 2012	GRUNDY	3	2
CONTRACT NO. 66B11				
ILLINOIS FED. AID PROJECT				

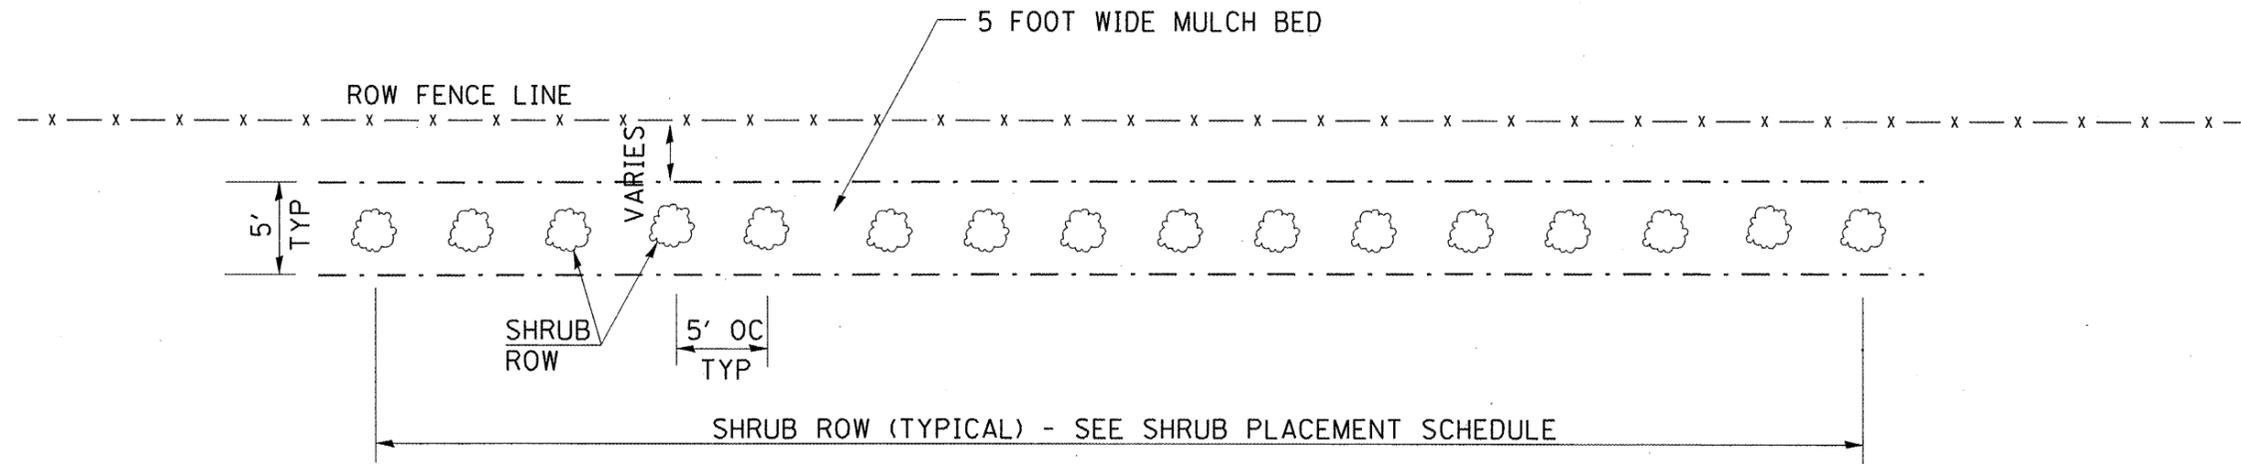

NOTES

PLACE PLANTINGS ALONG R.O.W. ON NORTH SIDE OF HIGHWAY/I-80 WESTBOUND.

PLACEMENT OF SHRUBS SHALL NOT INTERFERE WITH EXISTING PREVIOUSLY DEPARTMENT PLANTED SHRUB OR TREE LINES

ALL SHRUB BED AND MP (MILE POST) LOCATIONS ARE APPROXIMATE.

CONTACT LANDSCAPE ARCHITECT (KATHY CINDRICH), 815-434-8445 OR RESIDENT ENGINEER TWO WEEKS PRIOR TO PLANTING FOR SHRUB BED LAYOUT.

CONTRACTOR SHALL KEEP ALL EARTH EXCAVATION WITHIN THE JOB LIMITS.

SHRUB PLACEMENT SCHEDULE		
MP - MP	SHRUB NAME	QUANTITY
99.3 - 99.5	ARROWWOOD VIBURNUM	200
99.7 - 99.8	ARROWWOOD VIBURNUM	125
104.6 - 104.8	BAILEY REDOSIER DOGWOOD	150
105.2 - 105.7	BAILEY REDOSIER DOGWOOD	520
105.9 - 106.3	BAILEY REDOSIER DOGWOOD	440
109.2 - 109.3	GLOSSY BLACK CHOKEBERRY	180
109.8 - 110.0	GLOSSY BLACK CHOKEBERRY	200