

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D3 PATCHING 2012-1	**	10	1
		ILLINOIS	CONTRACT NO. 66B36	

** FORD & IROQUOIS

D-93-002-11

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

**PROPOSED
HIGHWAY PLANS**

FAI ROUTE 57 (I-57)
SECTION D3 PATCHING 2012-1

PAVEMENT PATCHING
FORD & IROQUOIS COUNTY

C-93-108-11



FUNCTIONAL CLASSIFICATION
RURAL - INTERSTATE
FAI RTE. 57 (I-57)
2010 ADT 16300
P.V 64.05% M.U. 28.37% S.U. 7.58%

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED 4/11 20 11

Eric S. Theobald
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

May 13 20 11
Scott E. Stitt P.E.
acting ENGINEER OF DESIGN AND ENVIRONMENT

May 13 20 11
Christine M. Road
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS



- INDEX OF SHEETS**
- COVER SHEET
 - GENERAL NOTES
 - SUMMARY OF QUANTITIES
 - TYPICAL SECTIONS
 - PATCHING SCHEDULE- NBL
 - PATCHING SCHEDULE- SBL
 - PAVEMENT MARKING SCHEDULES
 - TRAFFIC CONTROL AND PROTECTION, STANDARD 701400 (SPECIAL)
 - CLASS A PATCHING DETAILS
 - TYPICAL PAVEMENT MARKINGS

- STANDARDS**
- 000001-06 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
 - 001001-02 AREAS OF REINFORCEMENT BARS
 - 001006 DECIMAL OF AN INCH AND OF A FOOT
 - 421001-02 BAR REINFORCEMENT FOR CRC PAVEMENT
 - 701001-02 OFF-ROAD OPERATIONS 2L, 2W, MORE THAN 15' (4.5 m) AWAY
 - 701006-03 OFF-ROAD OPERATIONS 2L, 2W, 15' (4.5 m) TO 24" (600 mm) FROM PAVEMENT EDGE
 - 701101-02 OFF-ROAD OPERATIONS MULTILANE, 15' (4.5 m) TO 24" (600 mm) FROM PAVEMENT EDGE
 - 701106-02 OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 m) AWAY
 - 701401-06 LANE CLOSURE, FREEWAY/EXPRESSWAY
 - 701411-07 LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP FOR SPEEDS ≥ 45 MPH
 - 701426-04 LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≥ 45 MPH
 - 701901-01 TRAFFIC CONTROL DEVICES

END PROJECT
IL RTE. 116
M.P. 292.84)

IROQUOIS COUNTY LINE
(M.P. 263.40)

BEGIN PROJECT
CHAMPAIGN COUNTY LINE
(M.P. 257.17)

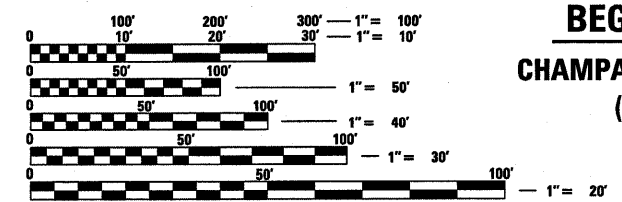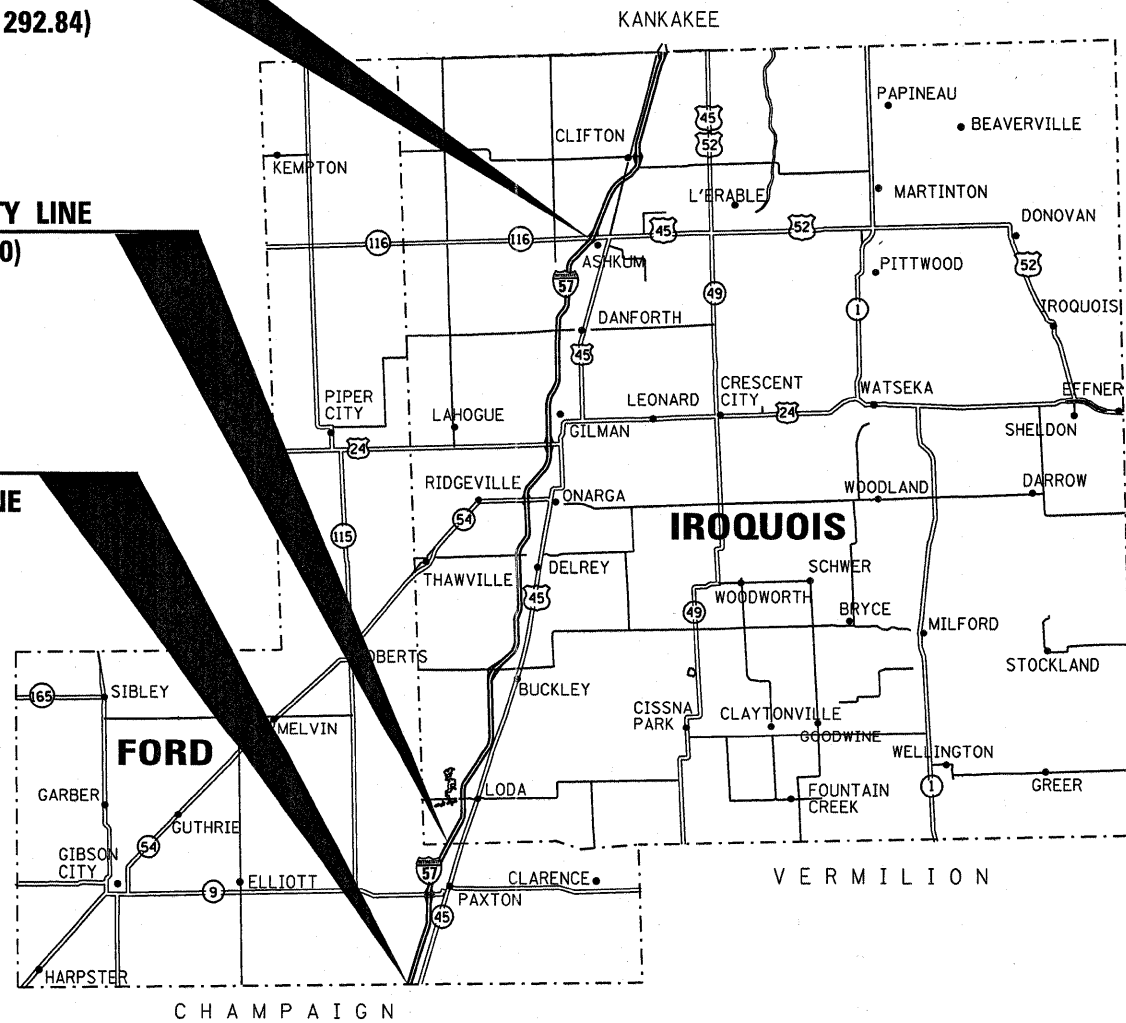

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER JOE KANNEL, P.E.
UNIT CHIEF PAT BRABOY
TOWNSHIPS VARIOUS
CONTRACT NO. 66B36

GROSS LENGTH = 177,777.60 FT. = 33.67 MILE

INDIANA