

F.A.S. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
206	05-00094-03-GR	MERCER	11	2
STA. 124+54.77 TO STA. 257+10.06				
FED. ROAD DIST. NO. 7			ILLINOIS	

SUMMARY OF QUANTITIES

CODE NUMBER	PAY ITEMS	UNIT	TOTAL QUANTITY
63000001	STEEL PLATE BEAM GUARDRAIL, TYPE A, 6 FOOT POSTS	FOOT	4,460
63100167	TRAFFIC BARRIER TERMINAL, TYPE I (SPECIAL) TANGENT	EACH	12
63100075	TRAFFIC BARRIER TERMINAL, TYPE 5A	EACH	3
63300725	STEEL PLATE BEAM GUARDRAIL (SHORT RADIUS)	FOOT	25
67100100	MOBILIZATION	L. SUM	1
X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L. SUM	1

SCHEDULE OF QUANTITIES

63000001 STEEL PLATE BEAM GUARDRAIL, TYPE A, 6 FOOT POSTS FOOT

RT. STA. 129+12.5 - 133+12.5	400
LT. STA. 179+12.5 - 182+10.0	297.5
LT. STA. 190+88.5 - 191+38.5	50
RT. STA. 234+35 - 242+72.5	837.5
LT. STA. 235+18 - 243+05.5	787.5
LT. STA. 245+75.7 - 256+13.2	1037.5
RT. STA. 245+75.7 - 256+25.7	1050
TOTAL	4,460

63100167 TRAFFIC BARRIER TERMINAL, TYPE I (SPECIAL) TANGENT EACH

RT. STA. 128+62.5 - 129+12.5	1
RT. STA. 133+12.5 - 133+62.5	1
LT. STA. 178+72.5 - 179+12.5	1
LT. STA. 182+10.0 - 182+60.0	1
LT. STA. 190+38.5 - 190+88.5	1
LT. STA. 191+38.5 - 191+88.5	1
RT. STA. 233+85 - 234+35	1
RT. STA. 242+72.5 - 243+22.5	1
LT. STA. 234+68 - 235+18	1
LT. STA. 243+05.5 - 243+55.5	1
LT. STA. 256+13.2 - 256+63.2	1
RT. STA. 256+25.8 - 256+75.8	1
TOTAL	12

63100075 TRAFFIC BARRIER TERMINAL, TYPE 5A EACH

RT. STA. 243+66 - 243+80.6	1
RT. STA. 245+61 - 245+75.7	1
LT. STA. 245+61 - 245+75.7	1
TOTAL	3

63300725 STEEL PLATE BEAM GUARDRAIL (SHORT RADIUS) FOOT

RT. STA. 243+52 - 243+66	25
TOTAL	25

67100100 MOBILIZATION L. SUM

COMPLETE	1
TOTAL	1


X7010216 TRAFFIC CONTROL AND PROTECTION, (SPECIAL) L. SUM

COMPLETE	1
TOTAL	1

GENERAL NOTES

1. GUARDRAIL PLANS ARE FROM STA. 124+54.77 TO STA. 257+10.06. BRIDGE OMISSION FROM STA. 243+80.51 TO STA. 245+61.20.
2. PROJECT INCLUDES DELIVERY AND COMPLETE INSTALLATION OF GUARDRAIL AS SHOWN ON PLANS. COUNTY WILL REMOVE GUARDRAIL AS PART OF THE KNOXVILLE ROAD DAY LABOR IMPROVEMENTS PROJECT. COORDINATE WITH COUNTY REGARDING SCHEDULING OF WORK.
3. TRAFFIC CONTROL IS OUTLINED IN THE SPECIAL PROVISION TRAFFIC CONTROL AND PROTECTION, (SPECIAL).
4. FOR STABILIZATION, ALL TYPE III BARRICADES SHALL REQUIRE A MINIMUM OF FOUR SANDBAGS PER BARRICADE.

TYPICAL SECTION

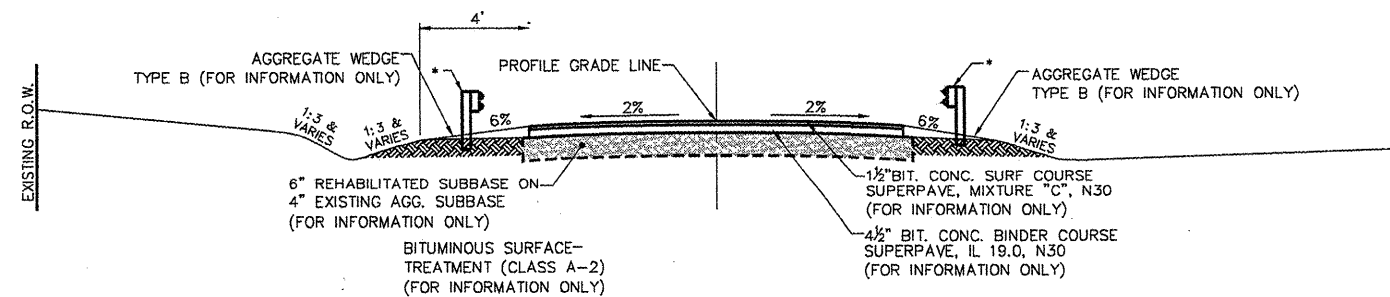

PROPOSED TYPICAL ROADWAY SECTION - GUARDRAIL

STA. 124+54.77 TO STA. 194+01.98
 STA. 203+61.70 TO STA. 243+80.57
 STA. 245+61.12 TO STA. 257+10.06

* SEE STD DETAIL FOR HINGE POINT LOCATION AT GUARDRAIL.
 RT STA. 128+62.5 - 133+62.5
 LT STA. 178+72.5 - 182+60.0
 LT STA. 190+38.5 - 191+88.5
 RT STA. 233+85 - 243+22.5
 LT STA. 234+68 - 243+55.5
 RT STA. 243+52 - 243+80.6
 LT STA. 245+75.7 - 256+63.2
 RT STA. 245+75.7 - 256+75.8

GENERAL NOTES, TYPICAL SECTION, SUMMARY AND SCHEDULE OF QUANTITIES

SECTION 05-00094-03-GR
 F.A.S. RTE. 206, STA. 124+54.77 TO 257+10.06
 RICHLAND GROVE TOWNSHIP
 MERCER COUNTY