


SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
10-00091-00-BT	EFFINGHAM	9	2
CONTRACT NO. 95646			

GENERAL NOTES

1. SEEDING: THIS WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF SECTION 250 OF THE STANDARD SPECIFICATIONS AND SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR SEEDING.
 - A. FERTILIZER NUTRIENTS SHALL BE APPLIED AT THE RATE OF 100 LB/ACRE
 - B. MULCHING SHALL BE DONE IN ACCORDANCE WITH ARTICLE 251 OF THE STANDARD SPECIFICATIONS AND SHALL BE DONE BY METHOD 2, PROCEDURE 1 AT THE RATE OF 2 TONS PER ACRE.
2. NO PAYMENT FOR OVERHAUL WILL BE MADE ON THIS SECTION.

SUMMARY OF QUANTITIES			
CODE NO.	ITEM	UNIT	QUANTITY
X0321317	GRANULAR BACKFILL	CU YD	60
X0322508	PEDESTRIAN TRUSS SUPERSTRUCTURE	SQ FT	1500
X2501000	SEEDING, CLASS 2 (SPECIAL)	ACRE	0.6
20300100	CHANNEL EXCAVATION	CU YD	130
20400800	FURNISHED EXCAVATION	CU YD	430
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	100
28001000	AGGREGATE (EROSION CONTROL)	TON	320
28100209	STONE RIPRAP, CLASS A5	TON	775
28200200	FILTER FABRIC	SQ YD	775
50300225	CONCRETE STRUCTURES	CU YD	68.0
50800105	REINFORCEMENT BARS	POUND	9680
51200956	FURNISHING METAL SHELL PILES 12" X 0.129"	FOOT	880
51202305	DRIVING PILES	FOOT	880
51203200	TEST PILE METAL SHELLS	EACH	2
51500100	NAME PLATES	EACH	1
67100100	MOBILIZATION	L SUM	1

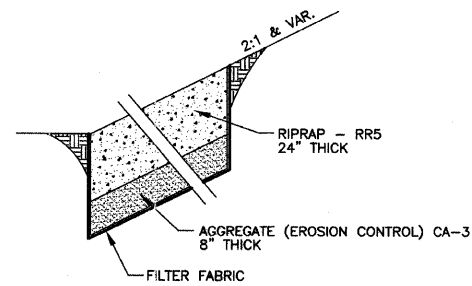

STONE RIPRAP, CLASS A5 DETAIL